ADF240-2B-xxV2 Series

DESCRIPTIONS 240W, AC/DC DIN-Rail Power Supply



RoHS

FEATURES

- Universal 85 - 264VAC or 120 - 370VDC Input voltage
- Accepts AC or DC input (dual-use of same terminal)
- Operating ambient temperature range: -40℃ to +85℃ (Support high temperature 60℃ full load operation)
- High efficiency up to 94%, high reliability
- DC OK function(Supports single-machine fault alarms in direct parallel mode)
- Active PFC
- 150% peak load output for 3 seconds
- DC ON output status indicator LED
- Output short circuit, over-current, over-voltage, over-temperature protection
- Operating altitude up to 5000m
- OVCIII @ EN62477 2000m
- Design refer to IEC/UL/BS EN 62368/61010

APPLICATIONS

- Industrial control equipment
- Factory automation
- Mechanical electrical equipment

Selection Guide

Certification	Part No.	Output Power (W)	nominal Output Voltage and Current (vo/Io)	Output Voltage Adjustable Range (V)	Efficiency at 230VAC (%) Typ.	Max. Capacitive Load (μF)
--	ADF240-2B-12V2	240	12V/20A	12.0-14.0	92	20000
	ADF240-2B-24V2		24V/10A	24.0-28.0	94	20000
	ADF240-2B-48V2		48V/5A	48.0-55.0		10000

Note: The product picture is for reference only.For details, please refer to the actual product.

Specifications

Product Characteristics	Item		Operating Conditions		Min.	Typ.	Max.	Unit
Input Specifications	Input Voltage Range		AC input		85	--	264	VAC
			Rated input (Certified voltage)		100	--	240	
			DC input		120	--	370	VDC
	Input Voltage Frequency		AC input		47	--	63	Hz
			Rated AC input(Certified voltage)		50	--	60	
	Input Current		Rated Input(Certified voltage)		--	--	3	A
			115VAC		--	--	3	
			230VAC		--	--	1.5	
	Inrush Current		115VAC	Cold start	--	15	--	
			230VAC		--	30	--	
	Power Factor		115VAC		--	0.98	--	--
			230VAC		--	0.94	--	
	Start-up Delay Time		115VAC/230VAC, rated load		--	500	3000	ms
	Leakage Current		264VAC		< 2 mA			
	Hot Plug				Unavailable			
Output Specifications	Output Voltage Accuracy		Full load range		--	±1.0	--	%
	Line Regulation		Rated load		--	±0.5	--	
	Load Regulation		0% - 100% load		--	±1.0	--	
	Ripple & Noise*		20MHz bandwidth (peak-peak value)	12V/24V	--	--	100	mV
				48V	--	--	150	
	Stand-by Power Consumption				--	3	--	W
	Hold-up Time				--	20	--	ms
	DC OK Signal		Resistive load		30VDC/1A Max.			
	Short Circuit Protection				Hiccup mode, continuous, self-recover			
	Over-current Protection		230VAC, rated load		≥105% Io, self-recover			
	Over-voltage Protection		12V		≤18V (Out voltage hiccup)			
			24V		≤35V (Out voltage hiccup)			
			48V		≤60V (Out voltage hiccup)			
	Over-temperature Protection		230VAC 100% load	Over-temperature protection start	--	--	90	℃
				Over-temperature protection release	60	--	--	
General	Isolation	Input - ⏚	Electric strength test for 1min., leakage current <15mA		2000	--	--	VAC
		Input -			4000	--	--	

Specifications	Test	output					
		Output -⏚	Electric strength test for 1min., leakage current <5mA		500	--	--
	Insulation Resistance	Input - ⏚	Ambient temperature: 25 ± 5℃ Relative humidity: < 95%RH, no condensation Test voltage: 500VDC		100	--	--
		Input - output			100	--	--
		Output -⏚			100	--	--
	Operating Temperature				-40	--	+85
	Storage Temperature				-40	--	+85
	Storage Humidity		Non-condensing		--	--	95
	Operating Humidity				--	--	95
	Switching Frequency				--	100	--
	Power Derating		Operating temperature derating	-40℃ to -30℃	3.35	--	--
				+60℃ to +85℃	3	--	--
			Input voltage derating	85VAC-100VAC	1.33	--	--
	Safety Class				CLASS I		
	MTBF		MIL-HDBK-217F@25℃		>300,000 h		
Mechanical Specifications	Case Material		Metal (AL5052, SPCC)				
	Dimensions		124.00mm x 41.00mm x 110.00mm				
	Weight		660g (Typ.)				


Note: 1.*The "Tip and barrel method" is used for ripple and noise test, output parallel 47uF electrolytic capacitor and 0.1uF ceramic capacitor, please refer to Enclosed Switching Power Supply Application Notes for specific information;


2.*DC OK Signal: When the output voltage is normal, the relay is connected. When the output voltage is abnormal , the relay is disconnected.

Electromagnetic Compatibility (EMC)

Electromagnetic Compatibility (EMC)	Emissions (EMI)	CE	CISPR32/EN55032 CLASS B		
		RE	CISPR32/EN55032 CLASS B		
		Harmonic current	IEC/EN61000-3-2 CLASS A and CLASS D		
	Immunity (EMS)	ESD	IEC/EN 61000-4-2 Contact ±8KV/Air ±15KV		perf. Criteria A
		RS	IEC/EN 61000-4-3 80MHz - 1GHz 10V/m 1.4GHz - 2GHz 3V/m 2GHz - 2.7GHz 1V/m		perf. Criteria A
		EFT	IEC/EN 61000-4-4 ±4KV		perf. Criteria A
		Surge	IEC/EN 61000-4-5 line to line ±2KV/line to ground ±4KV		perf. Criteria A
		CS	IEC/EN61000-4-6 10 Vr.m.s		perf. Criteria A
		MS	IEC/EN61000-4-8 30A/m		perf. Criteria A
		Voltage dips	IEC/EN61000-4-11	0% of 115Vac, 0Vac, 1 cycle	perf. Criteria B
				40% of 115Vac, 46Vac, 10/12 cycle	
				70% of 115Vac, 80.5Vac, 25/30 cycle	
				0% of 230Vac, 0Vac, 1 cycle	
				40% of 230Vac, 92Vac, 10/12 cycle	
				70% of 230Vac, 161Vac, 25/30 cycle	
		Voltage interruption	IEC/EN61000-4-11	0% of 200Vac, 0Vac, 250/300 cycle	
		Semi F-47	80% of 200Vac 160Vac 1000mS 70% of 200Vac 140Vac 500mS 50% of 200VAC 100Vac 200mS		perf. Criteria A
		Walkie Talkie Interference Test	AT-SOP-TEST-0002		perf. Criteria B


Characteristic Curve

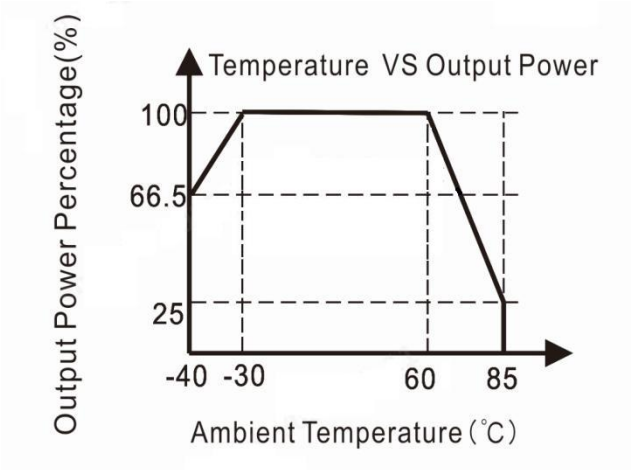


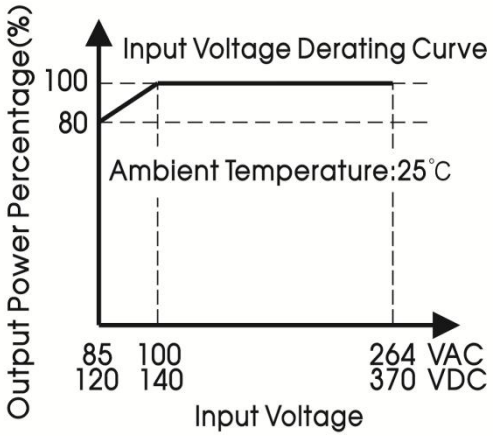


Note: 1. With an AC input voltage between 85 -100VAC and a DC input between 120-140VDC the output power must be derated as per the temperature derating curves;

2. This product is suitable for applications using natural air cooling.

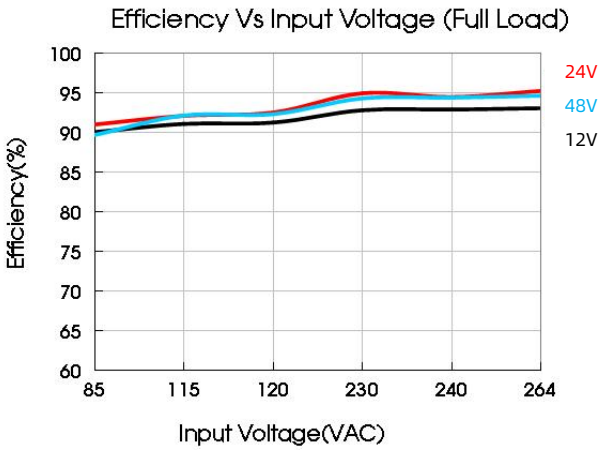


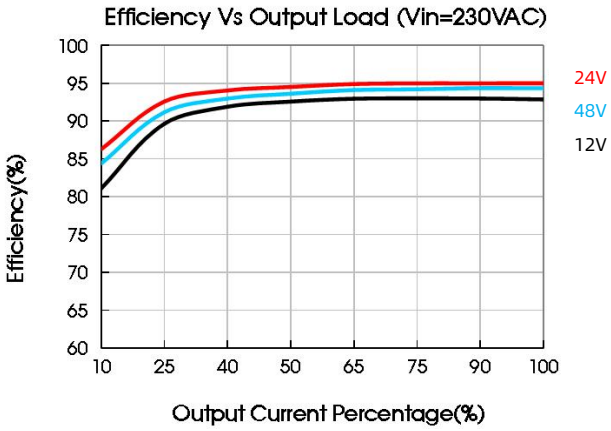

Over-current protection curve (Typ.)

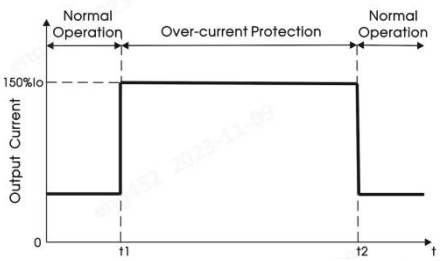

Short circuit protection curve (Typ.)

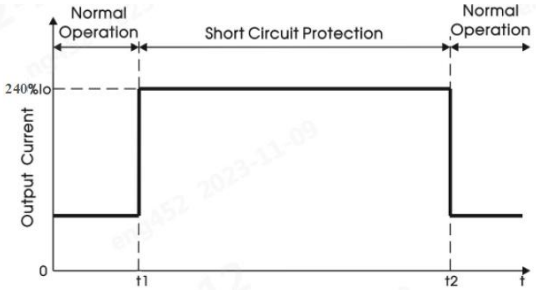



Remark:

1, Support maintaining rated stabilized voltage output for 3 seconds (duration from t1 to t2 in the diagram) under 1.5 times peak power load, and shut off the output if exceeding 3 seconds.


2, In dynamic power applications, such as those with peak power to low-power dynamic varying loads, the actual equivalent average output power must not exceed the rated power.

Installation Diagram

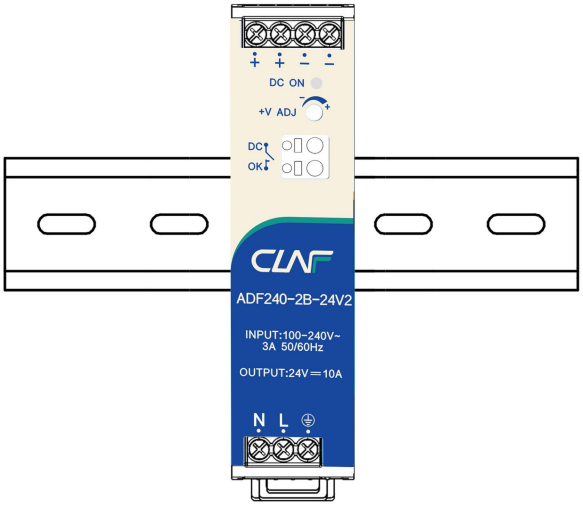


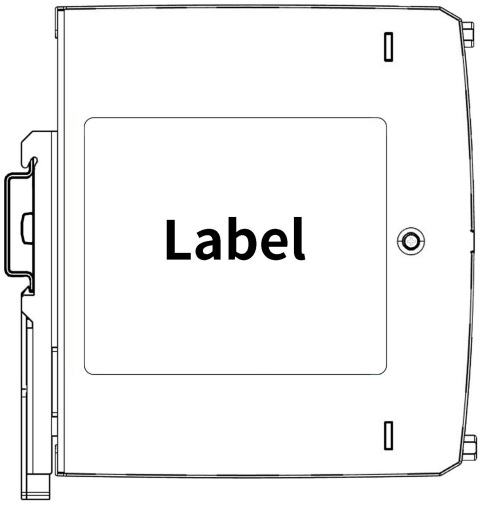


Bill Of Material		
1	Product	1 PCS
2	Phillips screwdriver Slotted screwdriver	1 PCS
3	TS35/7.5 or TS35/15	1 PCS
4	24–10AWG wires	/ PCS
	All above is only for reference, the actual wiring diameter and locking torque refer to the appearance size diagram	




Product



Phillips screwdriver
Slotted screwdriver
Diameter of the cutting tools: 3mm




TS35/7.5 or TS35/15




24–10AWG wires


Installation steps ①–②

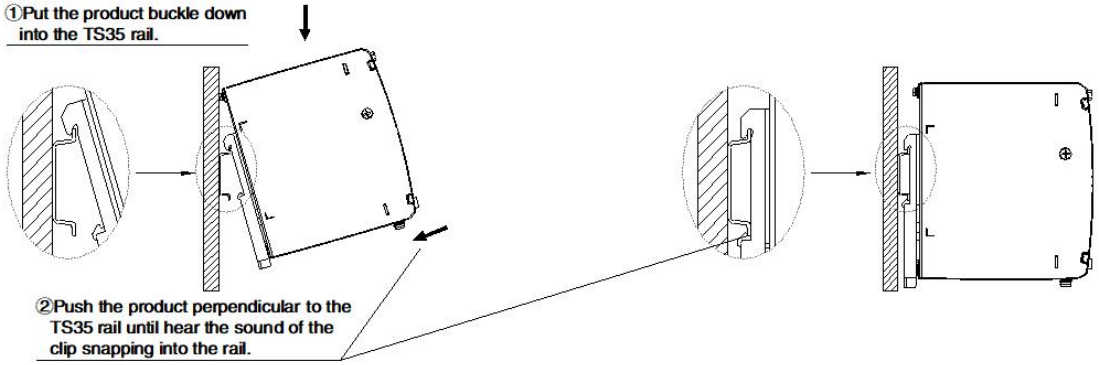

Disassembly steps ③–④

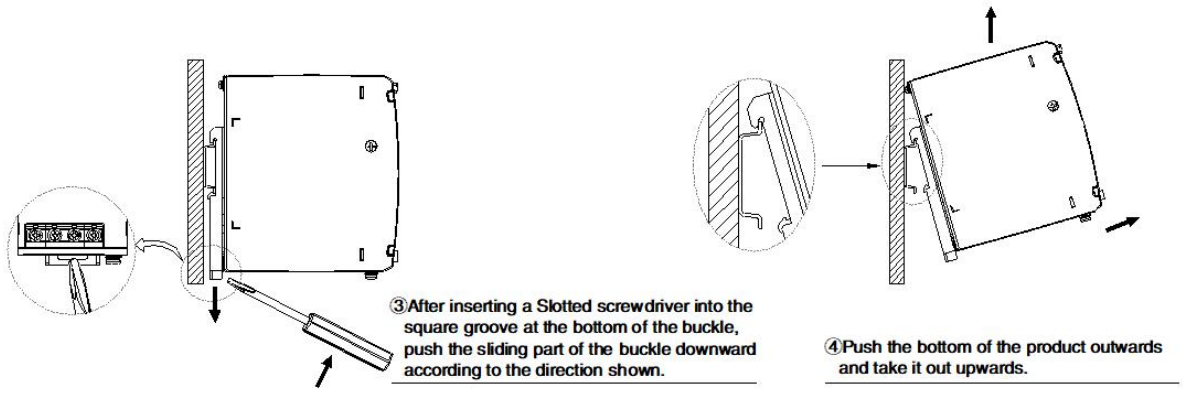


Connecting/Disconnecting Steps ⑤–⑥

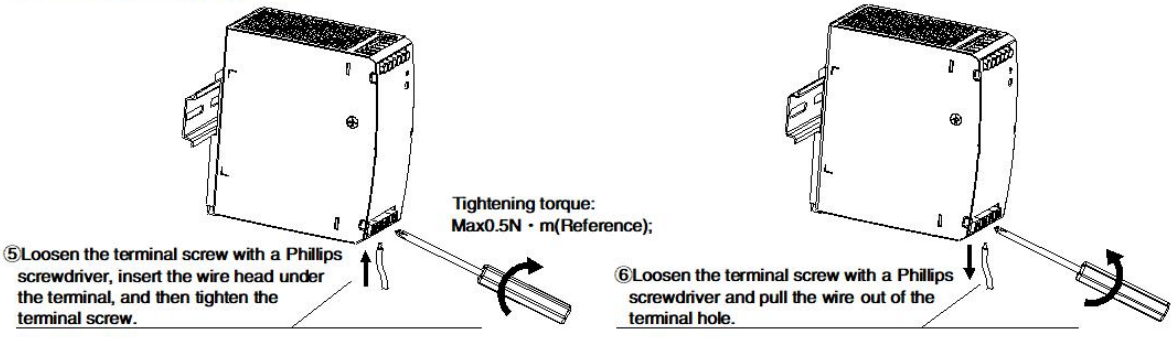

Note: Keep the following installation clearances: 20mm on top, 20mm on the bottom, 5mm on the left and right sides are recommended when the device is loaded permanently with more than 50% of the rated power. Increase this clearance to 15mm in case the adjacent device is a heat source (e.g. another power supply).

Dimensions and Recommended Layout

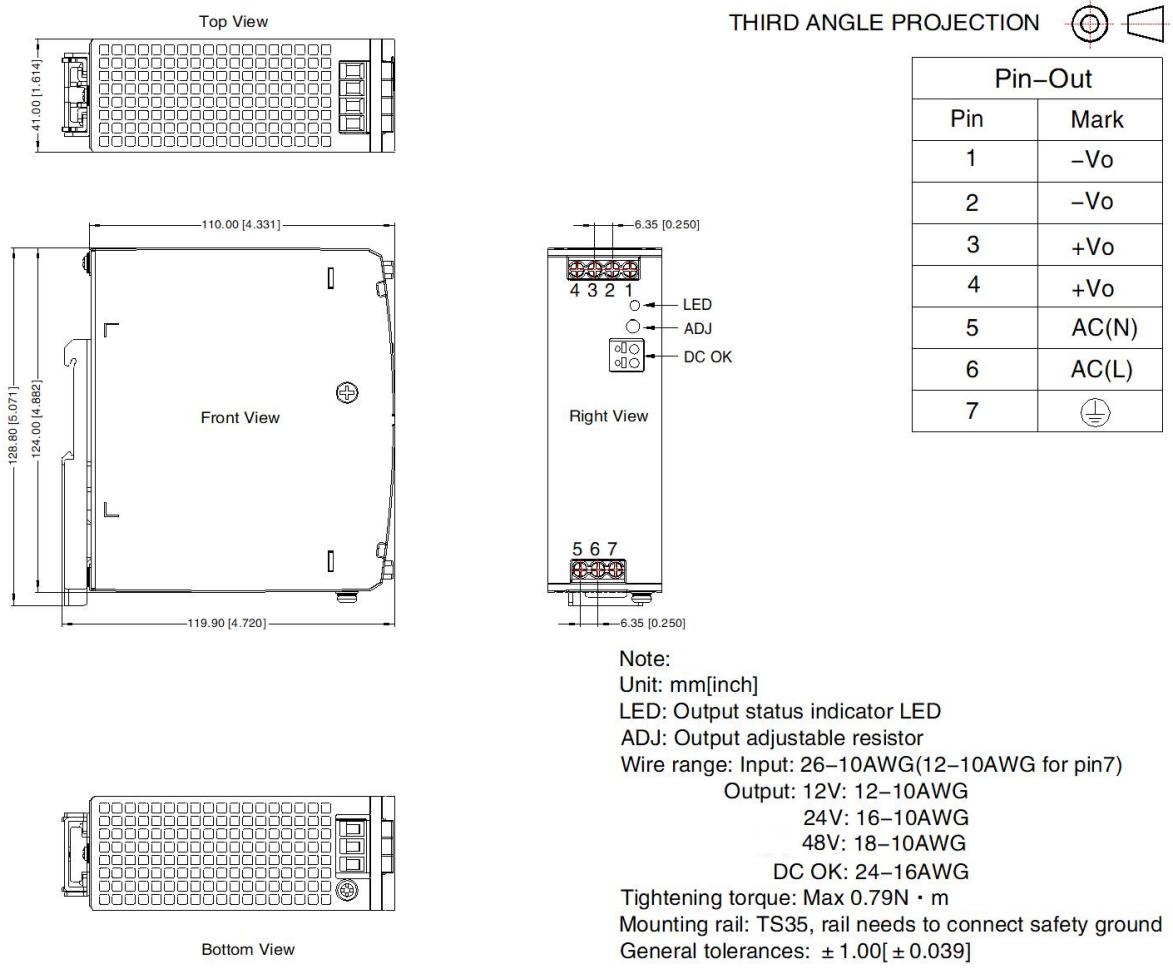

Pin–Out	
Pin	Mark
1	–Vo
2	–Vo
3	+Vo
4	+Vo
5	AC(N)
6	AC(L)
7	⏚

Note:
Unit: mm[inch]
LED: Output status indicator LED
ADJ: Output adjustable resistor
Wire range: Input: 26–10AWG(12–10AWG for pin7)
Output: 12V: 12–10AWG
24V: 16–10AWG
48V: 18–10AWG
DC OK: 24–16AWG
Tightening torque: Max 0.79N・m
Mounting rail: TS35, rail needs to connect safety ground
General tolerances: ±1.00[±0.039]

WARNING Risk of electrical shock, fire, personal injury or death:

AVERTISSEMENT AVERTISSEMENT Risque de choc électrique, d'incendie, de blessures corporelles ou de décès :

1.Do not use the power supply without proper grounding (Protective Earth). Use the terminal on the input block for earth connection and not one of the screws on the housing;

N'utilisez pas l'alimentation électrique sans mise à la terre appropriée (Terre protectrice). Utilisez le terminal sur le bloc d'entrée pour la connexion terrestre et non pas une des vis sur le boîtier;

2.Turn power off before working on the device, protect against inadvertent re-powering;

Éteignez l'alimentation avant de travailler sur l'appareil, protégez-vous contre la réénergisation accidentelle;

3.Make sure that the wiring is correct by following all local and national codes;

Assurez-vous que le câblage est correct en suivant tous les codes locaux et nationaux;

4.Do not modify or repair the unit;

Ne modifiez pas ou ne réparez pas l'appareil;

5.Do not open the unit as high voltages are present inside;

Ne modifiez pas ou ne réparez pas l'appareil;

6.Use caution to prevent any foreign objects from entering the housing;

Faire preuve de prudence pour empêcher les objets étrangers d'entrer dans le logement;

7.Do not use in wet locations or in areas where moisture or condensation can be expected;

Faire preuve de prudence pour empêcher les objets étrangers d'entrer dans le logement;

8.Do not touch during power-on, and immediately after power-off, hot surfaces may cause burns;



Ne touchez pas pendant l'alimentation et, immédiatement après l'alimentation, les surfaces chaudes peuvent causer des brûlures.

9.For ambient temperature ≤60℃, use ≥90℃ - copper wire only; for ambient temperature >60℃ to 85℃, use ≥105℃ - copper wire only; use only wires with a minimum dielectric strength of 300V (input) and 60V (output);

Température ambiante ≤60℃, utiliser ≥90℃ - seulement fils de cuivre; Température ambiante >60℃ et 85℃, utiliser ≥105℃ - seulement fils de cuivre; Uniquement pour l'ulilisation de fils de cuivre d'une résisitance d'isolation minimale de 300V (d'entrée) et 60V (de sortie).

Note:

1.Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25℃, humidity<95% RH with nominal input voltage and rated output load;

2.The room temperature derating of 5℃/1000m is needed for operating altitude greater than 2000m;

3.All index testing methods in this datasheet are based on our company corporate standards;

4.In order to improve the efficiency at high input voltage, there will be audible noise generated, but it does not affect product performance and reliability;

5.We can provide product customization service, please contact our technicians directly for specific information;

6.Products are related to laws and regulations: see "Features" and "EMC";

7.The out case needs to be connected to the earth (⏚) of system when the terminal equipment in operating, see "Dimensions and Recommended Layout" ;

8.Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units;

9.The output voltage can be adjusted by the output adjustable resistance ADJ, turn it up clockwise;

10.The power supply is considered a component which will be installed into a terminal equipment. All EMC tests should be confirmed with the final equipment. Please consult our FAE for EMC test operation instructions.