DESCRIPTIONS

AC-DC 100W DIN-Rail Power Supply



RoHS

3 Years Warranty

CE Report EN62368-1

UKCA Report BS EN62368-1

FEATURES

- Universal 85-264VAC or 120-370VDC input voltage
- Accepts AC or DC input (dual-use of same terminal)
- Operating ambient temperature range: -40℃ to +70℃
- High I/O isolation voltage up to 4000VAC
- Industrial-grade design
- OVC III, 2000m altitude (Designed to meet EN62477 standards)
- Low standby power consumption, high efficiency
- Low ripple & noise
- Output short circuit, over-current, over-voltage protection
- Withstand 300VAC surge input for 5s
- DIN rail TS35X7.5/ TS35X15 mountable
- The design conforms to UL/EN/BS EN62368, EN60335, EN61558, EN62477, EN61010

APPLICATIONS

- Industrial control equipment
- Machinery
- Smart home

Selection Guide

Certification	Part No.*	Output Power (W)	nominal Output Voltage and Current (vo/Io)	Output Voltage Adjustable Range ADJ (V)*	Efficiency at 230VAC (%) Typ.	Capacitive Load (μF) Max.
EN/BS EN	ADL100-2B-12V2	90.0	12V/7.5A	10.2-13.8	89.0	10000
	ADL100-2B-15V2	97.5	15V/6.5A	13.5-18.0	89.0	6400

	ADL100-2B-24V2	100.8	24V/4.2A	21.6-29.0	90.5	2500
	ADL100-2B-48V2	100.8	48V/2.1A	43.2-55.2	91.0	1100

Note:1.*Use suffix "Q" for conformal coating, with all other specifications identical.

2.*The actual adjustment range may extend outside the values stated, care should be exercised to ensure that the output voltage and power levels remain within the published maximum values.

3.The product picture is for reference only. For details, please refer to the actual product.

Selection Guide

Product Specification	Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Specifications	Input Voltage Range	AC input		85	--	264	VAC
		DC input		120	--	370	VDC
	Input Voltage Frequency			47	--	63	Hz
	Input Current	115VAC		--	--	3.0	A
		230VAC		--	--	1.6	
	Inrush Current	115VAC		--	35	--	
		230VAC		--	70	--	
	Contact Leakage Current	240VAC/50Hz		0.5mA RMS Max.			
	Hot Plug			Unavailable			
Output Specifications	Output Voltage Accuracy	0% - 100% load		--	±2.0	--	%
	Line Regulation	Rated load		--	±0.5	--	
	Load Regulation	230VAC		--	±1.5	--	
	Ripple & Noise*	20MHz bandwidth (peak-to-peak value)	12V/15V output	--	--	120	mV
			24V output	--	--	150	
			48V output	--	--	240	
	Stand-by Power Consumption	230VAC input	12V/15V/24V	--	--	0.5	W
			48V output	--	--	0.8	
	Short Circuit Protection			Hiccup, continuous, self-recovery			
	Over-current Protection	≥110% Io, self-recovery		Hiccup mode or constant current limiting when output voltage <50%, recovers automatically after fault condition is removed			
				Constant current limiting within 50% -100% rated output voltage, recovers automatically after fault condition is removed			
	Over-voltage Protection	12V output		≤20V	Hiccup, recovers automatically after fault condition is removed		
		15V output		≤25V			
		24V output		≤35V			
		48V output		≤64.8V			
	Minimum Load			0	--	--	%
	Start-up Time			--	--	3	s
	Hold-up Time	230VAC		--	30	--	ms


General Specifications	Isolation	Input - output	Electric Strength Test for 1min., leakage current < 5mA		4000	--	--	VAC
	Insulation Resistance	Input - output	500VDC		100	--	--	MΩ
	Operating Temperature				-40	--	+70	℃
	Storage Temperature				-40	--	+85	
	Storage Humidity				--	--	95	%RH
	Operating Humidity				--	--	90	
	Altitude				--	--	5000	m
	Power Derating		-40℃ to -30℃	12V/15V output	3.0	--	--	%/℃
				24V/48V output	7.0	--	--	
			+45℃ to +70℃		2.0	--	--	
			85VAC - 115VAC		0.67	--	--	%/VAC
			2000m - 5000m		5.0	--	--	%/Km
	Safety Class				CLASS II			
	MTBF				MIL-HDBK-217F@25℃ > 300,000 h			
Mechanical Specifications	Case Material		White plastic, flame-retardant and heat-resistant (UL94V-0)					
	Package Dimensions		70.00 x 92.66 x 58.00 mm					
	Weight		215g (Typ.)					
	Cooling Method		Free air convection					


Note: *The "Tip and barrel method" is used for ripple and noise test, output parallel 47uF electrolytic capacitor and 0.1uF ceramic capacitor,


Electromagnetic Compatibility (EMC)

Electromagnetic Compatibility (EMC)	Emissions	CE	CISPTV22/EN55032 CLASS B	
		RE	CISPTV22/EN55032 CLASS B	
		Harmonic current	IEC/EN61000-3-2 CLASS A	
	Immunity	ESD	IEC/EN61000-4-2 Contact ±6KV/Air ±8KV	Perf. Criteria A
		RS	IEC/EN61000-4-3 10V/m	Perf. Criteria A
		EFT	IEC/EN61000-4-4 ±4KV	Perf. Criteria A
		Surge	IEC/EN61000-4-5 Line to line ±2KV	Perf. Criteria A
		CS	IEC/EN61000-4-6 10Vr.m.s	Perf. Criteria A
		PFMF	IEC/EN61000-4-8 30A/m	Perf. Criteria A
		Voltage dips, short interruptions and voltage variations	IEC/EN61000-4-11 100% dip 1 periods, 30% dip 25 periods, 100% interruptions 250 periods	Perf. Criteria A

Product Characteristic Curve

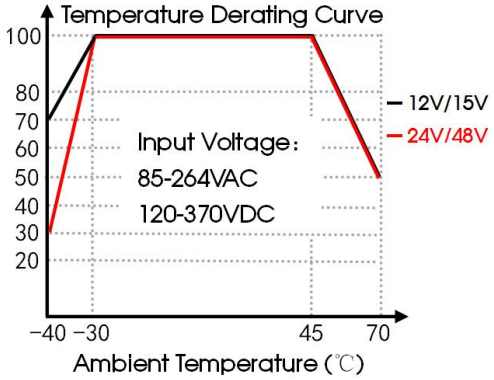


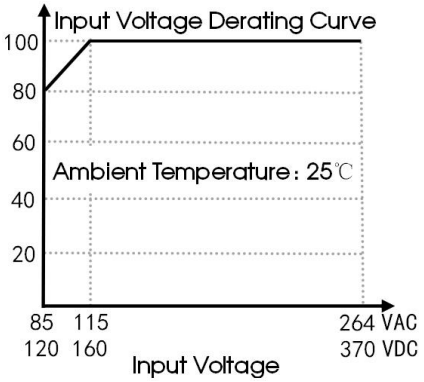


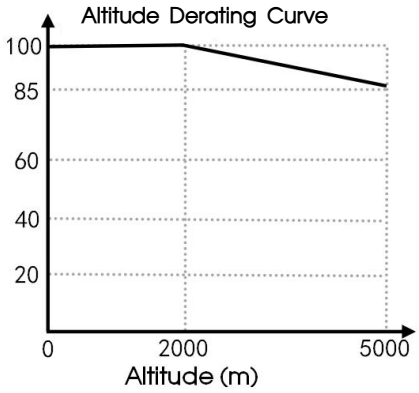

Note: ① With an AC input between 85-115VAC and a DC input between 120-160VDC, the output power must be derated as per temperature derating curves;


② This product is suitable for applications using natural air cooling; for applications in closed environment please consult FAE.

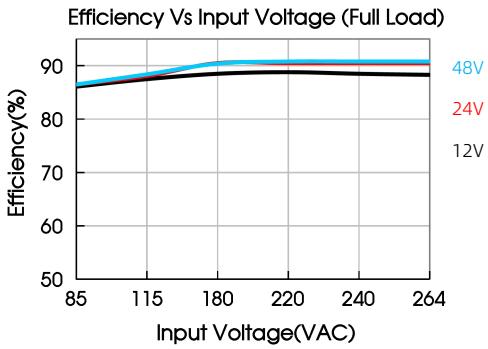

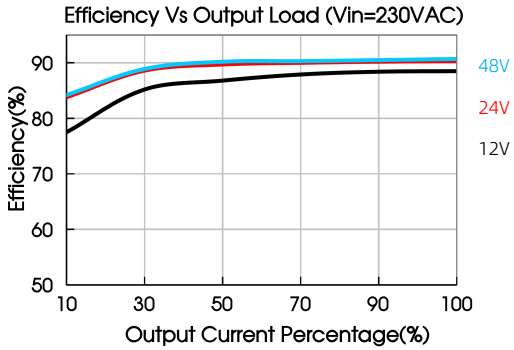

Dimensions and Recommended

THIRD ANGLE PROJECTION

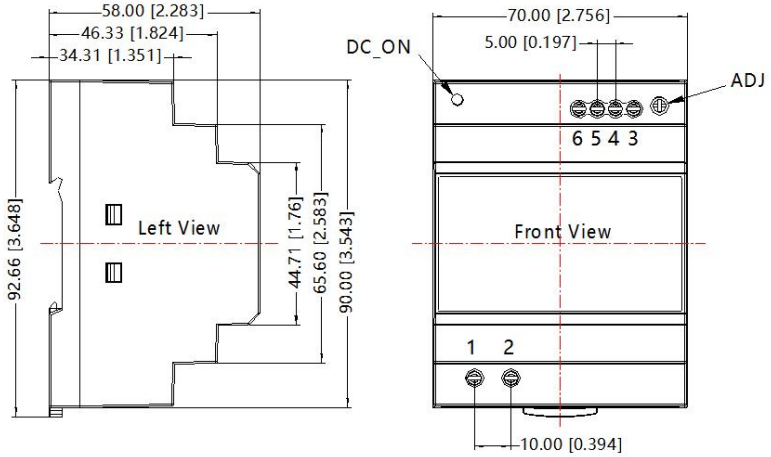

Pin-Out	
Pin	Mark
1	AC(L)
2	AC(N)
3	+Vo
4	+Vo
5	-Vo
6	-Vo

Note:
Unit: mm[inch]
ADJ: adjustable resistance to change output voltage
Wire range: 24-12 AWG
Tightening torque: Max 0.4 N·m
Mounting rail: TS35
General tolerances: ±1.00[±0.039]

Note:

1. Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25℃, humidity<75% with nominal input voltage and rated output load;
2. All index testing methods in this datasheet are based on our company corporate standards;
3. We can provide product customization service, please contact our technicians directly for specific information;
4. Specifications are subject to change without prior notice;
5. Products are related to laws and regulations: see "Features" and "EMC";
6. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.
7. The image certification marks are for reference only; please refer to the selection table for actual specifications. Certification is based on the physical mark or packaging label.