Descriptions

DEQB150-F3DxxN series of isolated 150W DC-DC converter products, with a wide 180-435VDC input voltage range. The efficiencies of up to 89.5%, isolation voltage 3000VAC, housing allowed operating temperature -40℃ to +105℃, with input under-voltage protection, output over-voltage, over-current, short-circuit protection, over-temperature protection, widely used in industrial control, communication and other fields.



RoHS

Features

- Wide input voltage range: 180-435VDC
- High efficiency up to 89.5%
- Enhanced isolation, isolation voltage: 3kVAC
- Input under-voltage protection, output over-voltage, over-current, short-circuit protection, over-temperature protection
- Shell operating temperature range Tc: -40℃ to +105℃
- Industry standard 1/4-Brick package and pin-out
- Meet the EN62368 standard

Applications

- Industrial control
- Electricity
- Instrumentation
- Communication

Selection Guide

Certification	Part No.	Ctrl Logic①	Input Voltage (VDC)		Output		Full Load Efficiency③ (%)Min./Typ.	Capacitive Load (μF) Max.	Capacitive Load (μF)Min.
			Nominal (Range)	Max.②	Voltage (VDC)	Current (mA) Max./Min.			
--	DEQB150-F3D05N	N	270 (180-435)	435	5	30000/0	87.5/89.5	10000	2000
	DEQB150-F3D12N	N			12	12500/0	87.5/89.5	5000	1000
	DEQB150-F3D24N	N			24	6250/0	87.5/89.5	2000	470
	DEQB150-F3D28N	N			28	5360/0	87/89	1500	470
	DEQB150-F3D48N	N			48	3130/0	87.5/89.5	800	470

Note:
①"P" indicates positive logic, "N" indicates negative logic;
②Exceeding the maximum input voltage may cause permanent damage;
③Efficiency is measured with nominal input voltage and rated output load.

Specifications

Product Specifications	Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Specifications	Input Current (full load/no-load)	Nominal input voltage	5V/12V/Output	--	621/30	635/50	mA
			24V Output	--	621/7	635/15	
			28V Output		625/7	639/15	
			48V Output	--	621/7	635/15	
	Reflected Ripple Current①	Nominal input voltage, 100% load		--	100	--	
	Starting Voltage			--	--	180	VDC
	Input Under-voltage Protection			155	165	--	
	Start-up Time	Nominal input voltage & constant resistance load		--	100	300	ms
	Input Filter			C filter			
	Hot Plug			Unavailable			
	Ctrl②	Module open		Ctrl pin pulled -Vin or pulled low (0-1.2VDC)			
		Module shutdown		Ctrl pin open or TTL pulled high (3.5-12VDC)			
		Input current when turned off		--	5	10	mA
Output Specifications	Output Voltage Accuracy	0%-100% load		--	±1	±3	%
	Line Regulation	Full load, the input voltage is from low to high		--	±0.1	±0.5	
	Load Regulation	0%-100% load		--	±0.5	±1	
	Transient Response Deviation	25% load step change, input voltage range	5V/12V Output	--	±6	±10	
			24V/28V Output	--	±5	±8	
			48V Output	--	±3	±5	
	Transient Recovery Time	Nominal input, 25% load step change		--	300	500	μs
	Temperature Coefficient	Full load		--	--	±0.03	%/℃
	Ripple & Noise③	20MHz bandwidth, 5% - 100% load③	5V Output	--	150	200	mVp-p
			12V/124V Output	--	180	250	
			28V Output	--	200	300	
			48V Output	--	250	350	
	Over-Temperature Protection	Case Temperature④		--	110	--	℃
	Trim	Input voltage range		80	--	110	%Vo
	Sense			--	--	105	
	Output Over-voltage Protection			110	120	130	
	Output Over-current Protection			110	135	180	%Io
	Short-circuit Protection			Hiccup, continuous, self-recovery			
General Specifications	Isolation	Electric strength test for 1 minute with a leakage current of 10mA max.	Input-Output	3000	--	--	VAC
			Input-Case	1500	--	--	
			Output-Case	1500	--	--	
	Insulation Resistance	Input-output resistance at 500VDC		100	--	--	MΩ
	Isolation Capacitance	Input-output capacitance at 100kHz/0.1V		--	600	1000	pF

General Specifications	Shell Operating Temperature Range	See Fig. 1	-40	--	+105	℃
	Storage Temperature		-55	--	+125	
	Storage Humidity	Non-condensing	5	--	95	%RH
	Pin Soldering Resistance Temperature	Soldering spot is 1.5mm away from case for 10 seconds	--	--	+300	℃
	Vibration		10-150Hz, 5G, 0.75mm. along X, Y and Z			
	Switching Frequency⑤	PWM mode	--	250	--	kHz
	MTBF	MIL-HDBK-217F@25℃	500	--	--	k hours
Mechanical Specifications	Case Material	Black flame retardant and heat resistant plastic (UL94 V-0), aluminum alloy				
	Dimensions	57.90 x 36.80 x 12.70 mm				
	Weight	83.0g (Typ.)				
	Cooling Method	Natural convection or forced air convection				

Note:

①See reflected ripple current test circuit "Design Reference" Fig 7;

②The voltage of Ctrl pin is relative to input pin -Vin.

③Under 0% -5% load conditions, ripple & noise does not exceed 5%Vo. The "Reliable measurement" method is used for ripple and noise test;

④The case temperature test points are shown in "Design Reference" Fig. 8.


⑤Switching frequency is measured at full load. The module reduces the switching frequency for light load (below 50%) efficiency improvement.

Electromagnetic Compatibility (EMC)


Emissions	CE	CISPR32/EN55032	CLASS A (see Fig.6 for recommended circuit)	
	RE	CISPR32/EN55032	CLASS A (see Fig.6 for recommended circuit)	
Immunity	ESD	IEC/EN61000-4-2	Air ±8kV/Contact ±6kV (see Fig.4 for recommended circuit)	perf. Criteria B
	RS	IEC/EN61000-4-3	20V/m (see Fig.6 for recommended circuit)	perf. Criteria A
	EFT	IEC/EN61000-4-4	100khz ±2kV (see Fig.6 for recommended circuit)	perf. Criteria B
	Surge	IEC/EN61000-4-5	line to line ±2kV (see Fig.6 for recommended circuit)	perf. Criteria B
	CS	IEC/EN61000-4-6	10 Vr.m.s (see Fig.6 for recommended circuit)	perf. Criteria A

Characteristic Curve


DEQB150-F3D05N

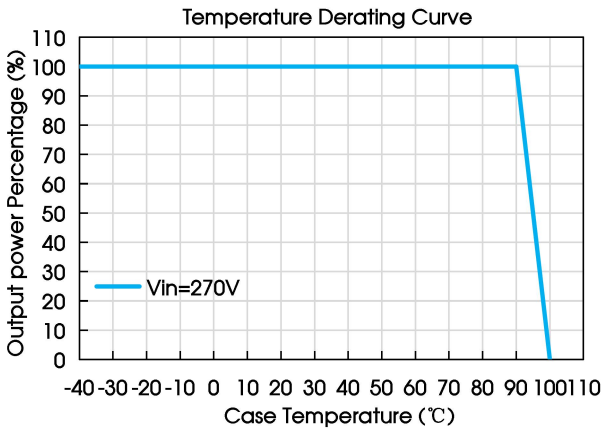


DEQB150-F3D12N

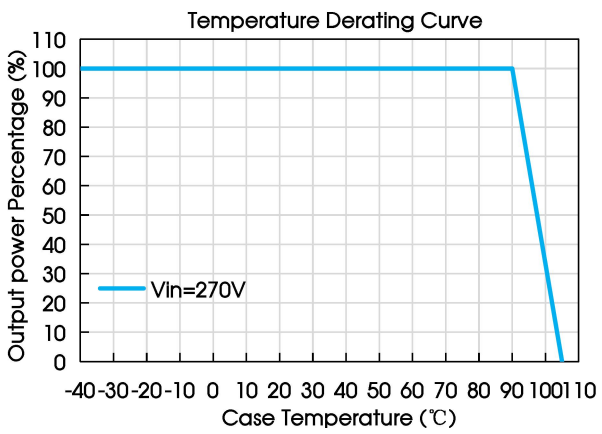


DEQB150-F3D24/28N

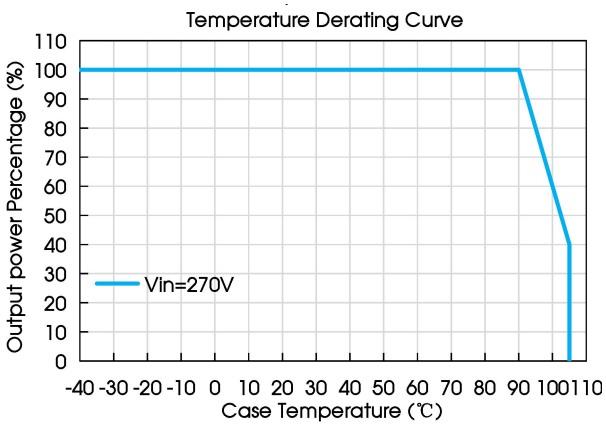


DEQB150-F3D48N

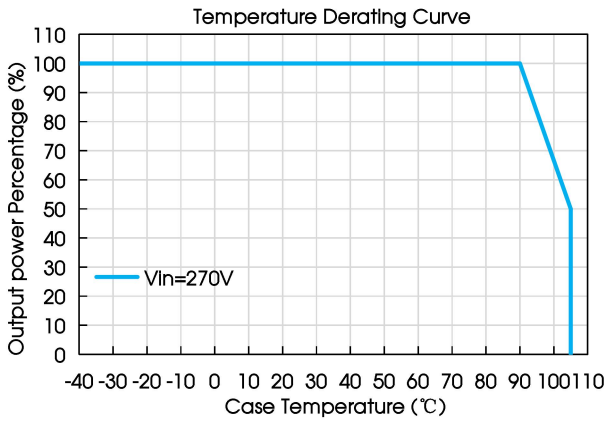


DEQB150-F3D05N

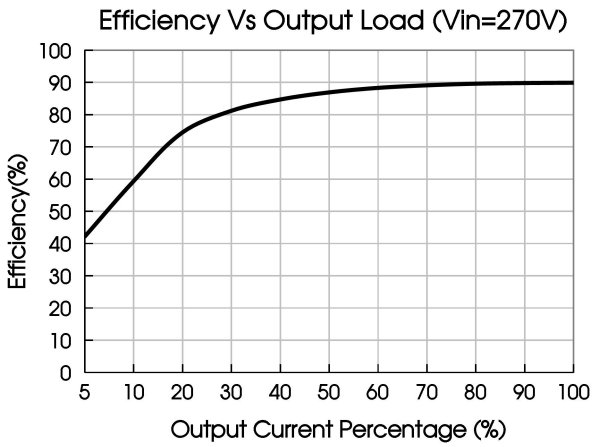

DEQB150-F3D05N

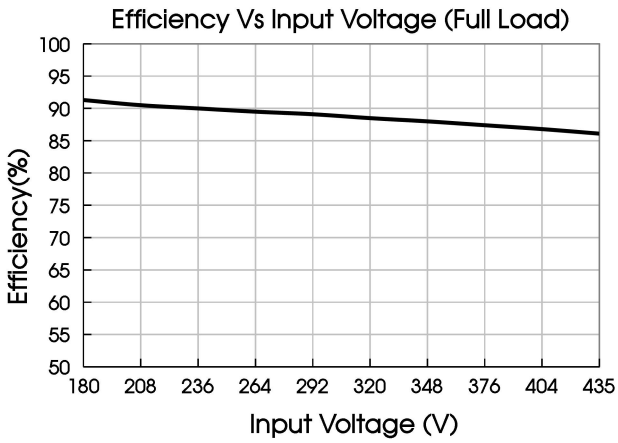

DEQB150-F3D48N

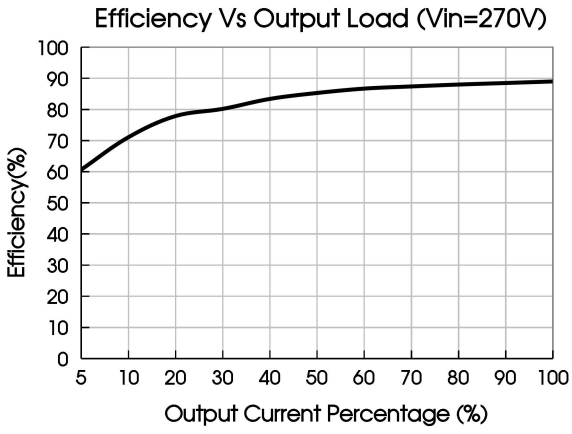

DEQB150-F3D48N

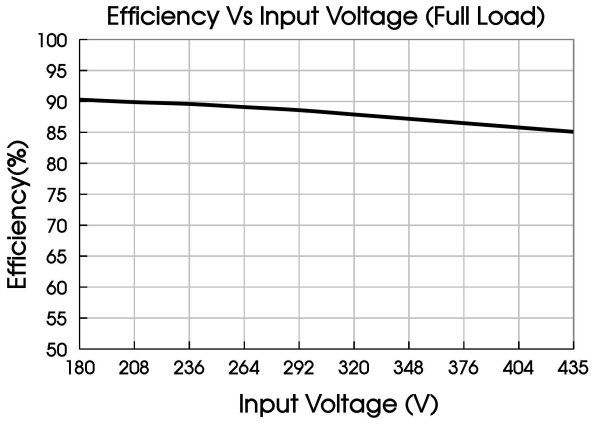


Fig.1

Remote Sense Application

1. Remote Sense Connection if not used

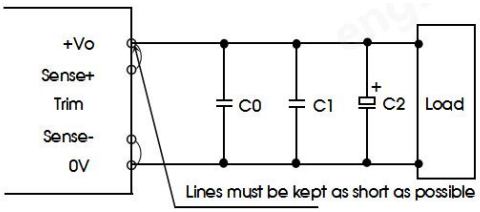


Fig.2

Note:

(1) If the sense function is not used for remote regulation the user must connect the +Sense to +Vo and -Sense to 0V.

(2) The connections between Sense lines and their respective power lines must be kept as short as possible, otherwise they may be picking up noise, interference and/or causing unstable operation of the power module.

2. Remote Sense Connection used for Compensation

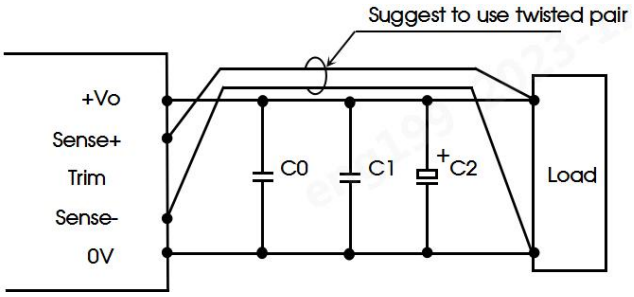


Fig.3

Note:

(1) Using remote sense with long wires may cause unstable output, please contact technical support if long wires must be used.

(2) PCB-tracks or cables/wires for Remote Sense must be kept as short as possible. Twisted pair or shielded wires are suggested for remote compensation and must be kept as short as possible.

(3) We recommend using adequate cross section for PCB-track layout and/or cables to connect the power supply module to the load in order to keep the voltage drop below 0.3V and to make sure the power supply's output voltage remains within the specified range.

(4) Note that large wire impedance may cause oscillation of the output voltage and/or increased ripple. Consult technical support or factory for further advice of sense operation.

Design Reference

1. Typical application

If the EMC recommended circuit not being used, please be sure to connect an electrolytic capacitor of at least 100uF in parallel with the input terminal to suppress the surge voltage that may be generated at the input terminal, and a capacitor larger than the minimum capacitive load in parallel with the output terminal to stabilise the product output working condition.

All the DC/DC converters of this series are tested before delivery using the recommended circuit shown in Fig. 4.

Input and/or output ripple can be further reduced by appropriately increasing the input & output capacitor values Cin and Cout and/or by selecting capacitors with a low ESR (equivalent series resistance). Also make sure that the capacitance is not exceeding the specified max. capacitive load value of the product.

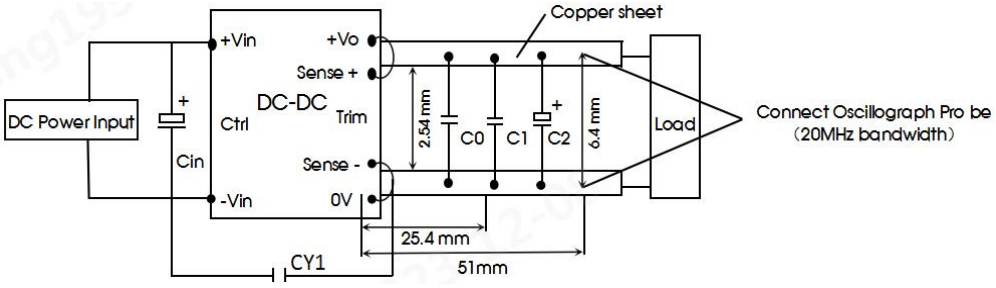


Fig.4

Part No.	Cin Selection Guide	C0 Selection Guide	C1 Selection Guide	C2 Selection Guide	CY1
5V	100uF/500V	22uF/25V	22uF/25V	2000uF/10V Solid-state capacitors	1nF/400VAC Y1 Safety capacitor
12V		4.7uF/100V	4.7uF/100V	1000uF/35V Solid-state capacitors	
24V				470uF/50V Electrolytic capacitor	
28V				470uF/50V Electrolytic capacitor	
48V				470uF/100V Electrolytic capacitor	

2. Trim Function for Output Voltage Adjustment (open if unused)

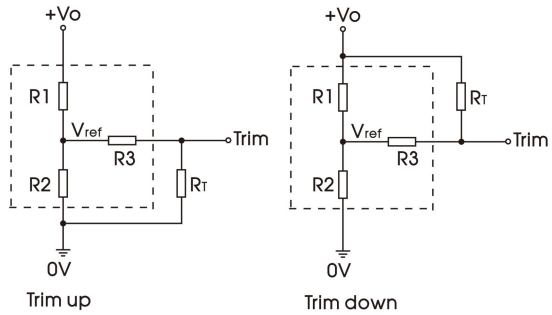


Fig.5

TRIM resistor connection (dashed line shows internal resistor network)

Calculation formula of Trim resistance:

$$up:\ R_T=\frac{aR_2}{R_2-a}-R_3 \qquad a=\frac{Vref}{Vo'-Vref}\cdot R_1$$

$$down:\ R_T=\frac{aR_1}{R_1-a}-R_3 \qquad a=\frac{Vo'-Vref}{Vref}\cdot R_2$$

Note:

a = Self-defined parameter, accurate to two decimal places;

R_T[kΩ]: Resistance of Trim.

Vo' is the actual output voltage;

Vref [VDC] indicates the reference voltage.

Vout (VDC)	R1(kΩ)	R2 (kΩ)	R3 (kΩ)	Vref (V)
5	8.7	2.87	11.5	1.25
12	10.91			2.5
24	24.77			2.5
28	29.41			2.5
48	52.28			2.5

3. EMC compliance circuit

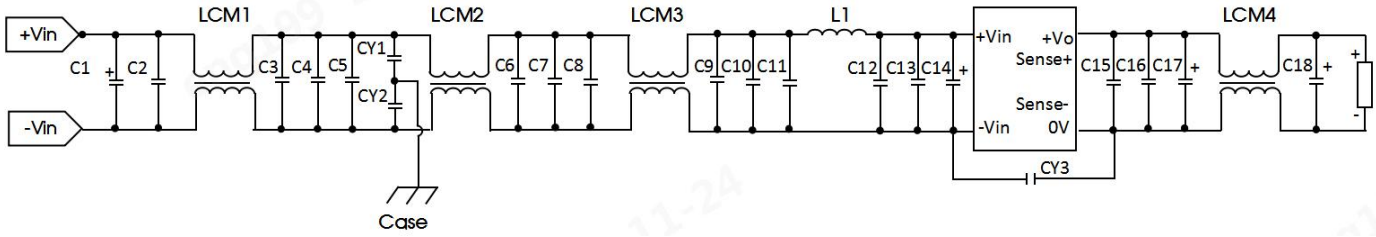


Fig.6

Components	Parameter description:	
	5V/12V Output	24V/28V/48V Output
C1	100uF/500V (Electrolytic capacitor)	
C14	47uF/500V (Electrolytic capacitor)	
C2, C3, C6, C9	2.2μF/450V (Film capacitor)	
C4, C5, C7, C8, C10, C11, C12, C13	0.1μF/630V (Ceramic capacitor)	
C15, C16	1μF/100V (Ceramic capacitor)	
C17, C18	330μF/63V (Electrolytic capacitor)	
LCM1	10mH, Recommended to use FL2D-3-103B	
LCM2	1mH, Recommended to use FL2D-5-102	
LCM3	7mH, Recommended to use FL2D-3-702B	
LCM4	4uH (Nickel zinc), Recommended to use FL2D-40-040	
L1	2.2uH/3A	
CY1, CY2	4.7nF/400VAC Y1 Safety capacitor	
CY3	1nF/400VAC Y1 Safety capacitor	NC

4. Reflected ripple current--test circuit

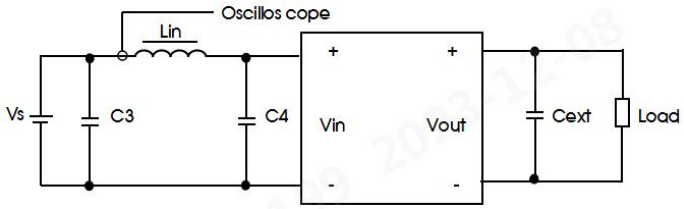


Fig.7

Components	Parameter description:
C3	100uF/500V
Lin	22uH/4.7A
C4	100uF/500V
Cext	See application circuit C0/C1/C2

5. Recommended scheme for thermal testing

In the application process, the thermal design of the product can be evaluated with the product temperature derating curve; or by testing the temperature of point A in Fig.8 to determine the stable working range of the product, when the temperature of point A is lower than 105℃, it is the stable working range of the product.



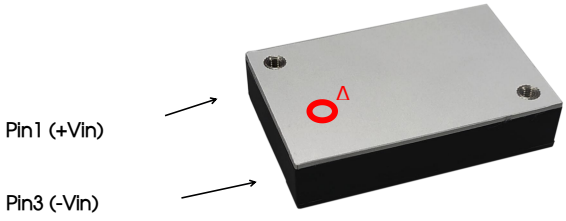



Fig.8

6. The products do not support parallel connection of their output

Dimensions and Recommended Layout

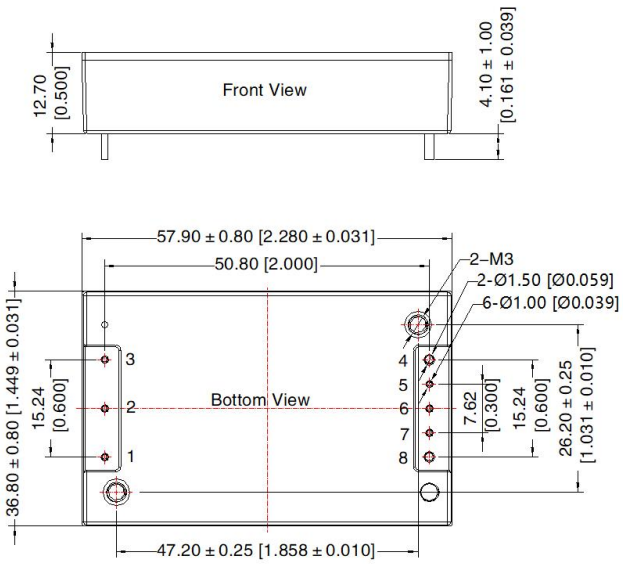

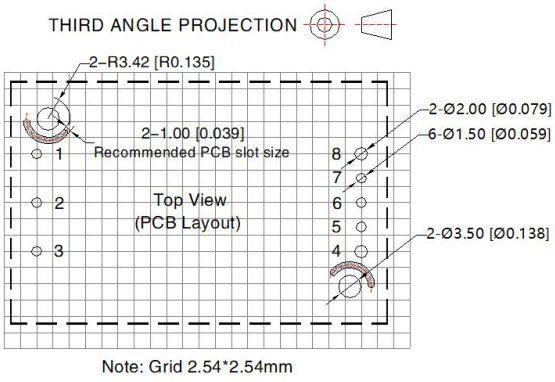



Note:
Unit: mm[inch]
Pin1, 2, 3, 5, 6, 7's diameter: 1.00 [0.039]
Pin4, 8's diameter: 1.50 [0.059]
Pin diameter tolerances: ± 0.10 [± 0.004]
General tolerances: ± 0.50 [± 0.020]
Mounting hole screwing torque: Max 0.4 N · m

Pin–Out			
Pin	Mark	Pin	Mark
1	+Vin	5	Sense–
2	Ctrl	6	Trim
3	–Vin	7	Sense+
4	0V	8	+Vo

Notes:

1. The maximum capacitive load offered were tested at input voltage range and full load;
2. Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25℃, humidity<75%RH with nominal input voltage and rated output load;
3. All index testing methods in this datasheet are based on company corporate standards;
4. Products are related to laws and regulations: see "Features" and "EMC";
5. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.