ADTF480-xxV2 Series

DESCRIPTIONS

AC-DC 480W DIN-Rail Power Supply



RoHS

FEATURES

- Universal 3x320-600VAC or 450-800VDC Input voltage
- Active PFC,PF up to 0.94(Typ)
- Operating ambient temperature range: -40℃ to +85℃, 60℃ @ 100% load without derating
- Standard DIN-Rail mounting
- High efficiency, high reliability
- LED indicator for output status
- 200% peak power lasts for 3s
- Output short circuit, over-current, over-voltage, over-temperature protection
- Support 3+1 parallel redundancy, current sharing against backflow voltage
- Operating altitude up to 5000m
- OVC Ⅲ (Safety according to EN61010)(2000m)
- Design refer to ANSI/ISA 71.04-2013 G3, Three-proof treatment, with anti-salt fog
- Safety according to IEC/UL62368, UL61010, EN61558, GB4943.1、UL508、SEMIF47

APPLICATIONS

- Industrial control equipment
- Factory automation
- Mechanical and electrical equipment

Selection Guide

Certification	Part No.	Output Power (W)	Nominal Output Voltage and Current (Vo/Io)	Output Voltage Adjustable Range (V)	Efficiency at 400VAC (%) Typ.	Max. Capacitive Load (μF)
--	ADTF480-12V2	360	12V/30A	12-14.4	94.5	20000
	ADTF480-24V2	480	24V/20A	24-28	95	20000

	ADTF480-36V2		36V/13.3A	36-42	95.5	20000
	ADTF480-48V2		48V/10A	48-56	95.5	20000
The product picture is for reference only. For details, please refer to the actual product.						

Specifications

Product Specifications	Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Specifications	Input Voltage Range	Rated input (Certified voltage)		380	--	480	VAC
		AC input		320	--	600	
		DC input		450	--	800	VDC
	Input Voltage Frequency	AC input rated frequency(Certified voltage)		50	--	60	Hz
		AC input		47	--	63	
	Input Current	Input rated current(Certified voltage)		--	--	1.0	A
		400VAC		--	--	1.0	
		480VAC		--	--	0.8	
	Inrush Current	400VAC	Cold start	--	3	10	
		480VAC		--	3	10	
	Power Factor	400VAC	Normal temperature, rated load	0.86	0.94	--	--
		480VAC		0.88	0.93	--	
	Contact leakage current	480VAC		< 2mA			
	Hot Plug			Unavailable			
Output Specifications	Output Voltage Accuracy	Full load range		--	±1	--	%
	Line Regulation	Rated load		--	±0.5	--	
	Load Regulation	Rated Input Voltage		--	±0.5	--	
	Ripple & Noise*	20MHz bandwidth (peak-to-peak value)	12V/24V	--	--	120	mV
			36V/48V	--	--	150	
	Temperature Coefficient			--	±0.03	--	%/℃
	Minimum Load			--	0	--	%
	Standby Power	400VAC		--	10	15	W
		480VAC		--	10	15	
	Start-up delay time	Full voltage, full load range (normal temperature, high temperature)		--	1	1.5	S
		Full voltage, full load range (low temperature)		--	--	3	
	Hold-up Time	Normal temperature,100% load	400VAC	18	22	--	ms
			480VAC	18	22	--	
	Short Circuit Protection			Hiccup mode, continuous, self-recover			
	Over-current Protection			110% - 200% Io hold for 3 sec then hiccups, automatic recover after fault condition is removed			
	Over-voltage Protection	12V		15-18VDC (Output voltage hiccups,			

					self-recover)			
			24V		30-35VDC (Output voltage hiccups, self-recover)			
			36V		44-53VDC (Output voltage hiccups, self-recover)			
			48V		58-63VDC (Output voltage hiccups, self-recover)			
	Over-temperature Protection		400VAC, 100%load	Over-temperature Protection start	--	--	85	℃
				Over-temperature Protection release	60	--	--	
General Specifications	Isolation Test	Input - ⏚	Electric strength test for 1min, leakage current < 5mA		2500	--	--	VAC
		Input - Output			4870	--	--	
		Output - ⏚			500	--	--	
		Output - DC OK	Electric strength test for 1min, leakage current < 1mA		500	--	--	
	Insulation Resistance	Input - ⏚	Environment temperature: 25±5℃ Relative humidity: < 95%, non-condensing Test voltage: 500VDC		100	--	--	MΩ
		Input - Output			100	--	--	
		Output - ⏚			100	--	--	
	Operating Temperature				-40	--	85	℃
	Storage Temperature				-40	--	85	
	Storage Humidity		Non-condensing		--	--	95	%RH
	Operating Humidity				20	--	90	
	Switching Frequency*		PFC	Rated load	40	--	55	kHz
			DC-DC		60	--	80	
	Power Derating		Operating temperature derating	+60℃ to +85℃	2.4	--	--	%/℃
			Input voltage derating (3P)	320VAC - 600VAC	--	--	--	%/VAC
			Input voltage derating (2P)	340VAC~460VAC	0.166	--	--	
				460VAC~600VAC	--	--	--	
	Safety Class				CLASS I			
	MTBF		MIL-HDBK-217F@25℃		≥186,000 h			
			MIL-HDBK-217F@40℃		≥250,000 h			
	Pollution Degree		2					
Mechanical Specifications	Case Material		Metal (AL5052)					
	Dimensions		127.00mm × 63.00mm × 124.00mm					
	Weight		980g (Typ.)					
	Cooling Method		Free air convection					

Note: *1 The "Tip and barrel method" is used for ripple and noise test, output parallel 47uF electrolytic capacitor and 0.1uF ceramic capacitor.

*2 The ambient temperature in the over-temperature protection performance is based on the ambient temperature 2cm below the guide rail as a reference

*3 The power supply has two converters with two different switching frequencies.

Functional Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Remote Control Switch(PS ON)*	power turn-on		0	--	0.8	VDC
	power turn-off		4	--	20	
DC OK Signal	Full input voltage range, full load range	DC OK power on	0.95Vo - Vo			
		DC OK power off	<0.90Vo			
Oring			Support direct parallel use, achieve 3+1 parallel redundancy			
Current Sharing Accuracy*	When multiple units are connected in parallel, the sub-modules shunt more than 50% of the rated load		--	±5	--	%
LED Signal	Main output status indication	Normal work	Green On			
		Power Off (No AC input) or PS ON	Green Turn-off			

Note: 1*.When multiple units work with current sharing, the output voltage deviation of each power supply working alone shall not exceed 100mV.

Environmental Characteristics

Item	Operating Conditions	Standard
High and Low Temperature Working	+85℃, -40℃,96H	GB2423.1, IEC60068-2-1
Sinusoidal Vibration	10 - 500Hz, 5g, three directions of X, Y, Z axis	GB2423.10, IEC60068-2-6
Salt Mist	+35℃, 5%NACL, 48H	GB2423.17, IEC60068-2-11
Cyclic Damp Heat	+25℃，95%RH - +60℃，95%RH，24H	GB2423.4、IEC60068-2-30
Low Temperature Storage	-40℃，24H	GB2423.1, IEC60068-2-1
High Temperature Storage	+85℃，24H	GB2423.2, IEC60068-2-2
High Temperature Aging	+60℃，96H	GB2423.2, IEC60068-2-2
Normal Temperature Aging	+25℃，24H	GB2423.1, IEC60068-2-1
Temperature Shock	-40℃ to +85℃，24H	GB2423.22, IEC60068-2-14
Temperature Cycle	-25℃ to +60℃，24H	GB2423.22, IEC60068-2-14
Hot and Humid	+85℃，85%RH，24H	GB2423.50, IEC60068-2-67
High Temperature Altitude	60℃，54KPa	GB2423.26、IEC60068-2-41
Low Temperature Altitude	-40℃，54KPa	GB2423.25、IEC60068-2-40
Sinusoidal Vibration Response	10 - 150Hz, 1g, three directions of X, Y, Z axis	GB/T 11287-2000、IEC60255-21-1
Sinusoidal Vibration Endurance Test		
Sinusoidal Impulse Response	15g, pulse duration 11ms, three times in each direction of X, Y, Z axis	GB/T 114537-1993、IEC60255-21-2
Sinusoidal Impact Endurance Test		
Packaging Drop	1m, one corner, three edges and six sides	GB2423.8, IEC68-2-32

Electromagnetic Compatibility (EMC)

Electromagnetic Compatibility	Emissions (EMI)	CE	CISPR32/EN55032	CLASS B
		RE	CISPR32/EN55032	CLASS B
		Harmonic current	IEC/EN61000-3-2	perf. Criteria A

(EMC)		Voltage flicker	IEC/EN61000-3-3		Fulfilled
	Immunity (EMS)	ESD	IEC/EN61000-4-2	Contact ±8KV/Air ±15KV	perf. Criteria A
		RS	IEC/EN61000-4-3	20V/m	perf. Criteria A
		EFT (Input)	IEC/EN61000-4-4	±4KV	perf. Criteria A
		EFT (Output)	IEC/EN61000-4-4	±2KV	perf. Criteria A
		EFT (DC OK)	IEC/EN61000-4-4	DC_OK to PE ±2KV	perf. Criteria A
		Surge (Input)	IEC/EN61000-4-5	line to line ±2KV/line to PE ±4KV	perf. Criteria A
		Surge (Output)	IEC/EN61000-4-5	line to line ±500V/line to PE ±1KV	perf. Criteria A
		Surge (DC OK)	IEC/EN61000-4-5	DC OK to PE ±1KV	perf. Criteria A
		CS	IEC/EN61000-4-6	20 Vr.m.s	perf. Criteria A
		Voltage dips, short interruptions and voltage variations immunity	IEC/EN61000-4-11	0% 70%	perf. Criteria A
		Power frequency magnetic field	IEC/EN61000-4-8	30A/m	perf. Criteria A
		Intercom interference test	MS-SOP-DQC-007		perf. Criteria A

Note:* output voltage accuracy within 5%, in accordance with perf. Criteria A standards.


Note: 1. *perf. Criteria:


A: The equipment shall continue to operate as intended without operator intervention;

B: After the test, the equipment shall continue to operate as intended without operator intervention;

C: Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions;

Characteristic Curve

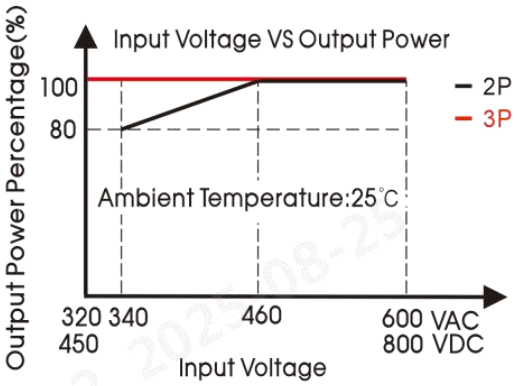

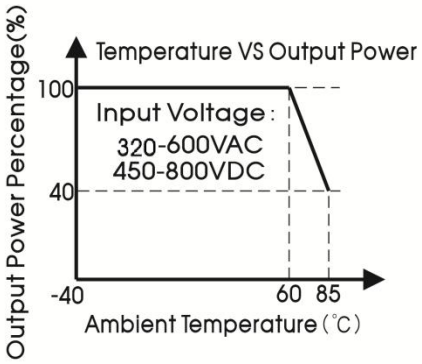



Note: 1.All curves are for 24V output, measured at input 3x400VAC, 50Hz, output Io, ambient temperature 25℃, unless otherwise stated;

2.With input voltage in case of phase loss between 340 - 460VAC,the output power must be derated as per the temperature derating curves;


3. This product is suitable for applications using natural air cooling, for applications in closed environment please consult our FAE;


4. The operating temperature and the ambient temperature are determined according to the air temperature at 2cm below the power supply.

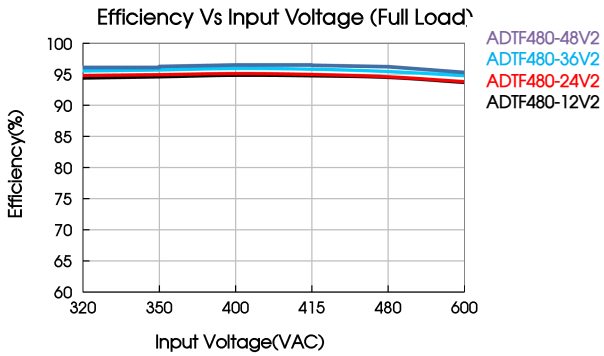

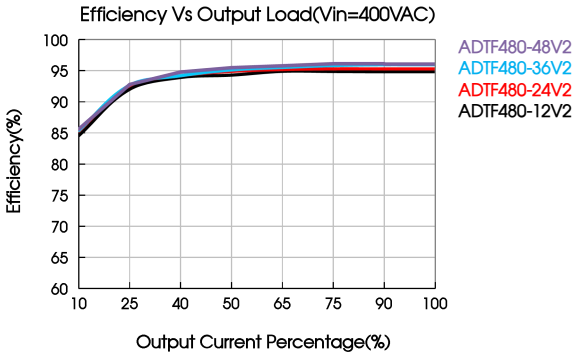

Installation Diagram

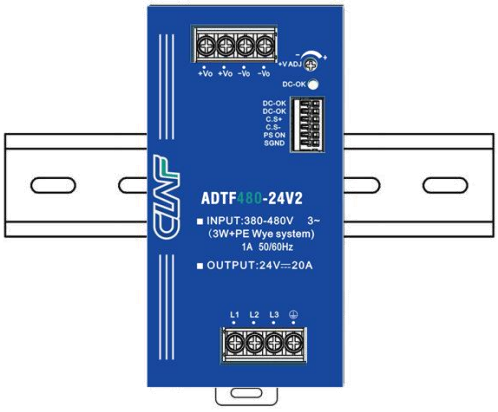

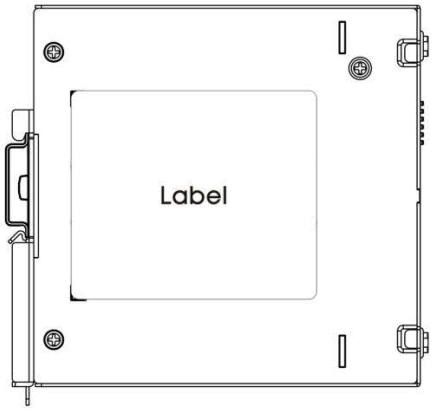


Note: Keep the following installation clearances: 20mm on top, 20mm on the bottom, 5mm on the left and right sides are recommended when the device is loaded permanently with more than 50% of the rated power. Increase this clearance to 15mm in case the adjacent device is a heat source (e.g. another power supply).


Materials required in the installation		
1	Product	1 PC
2	Phillips screwdriver Slotted screwdriver	1 PC
3	TS35/7.5 or TS35/15	1 PC
4	22-10AWG Wire	/ PCS
	The content is for reference only. Regarding the actual wire diameter and tightening torque, refer to the dimensional drawing.	




Product



Phillips screwdriver
Slotted screwdriver
Diameter of the cutting
Diameter: 3mm




TS35/7.5 or TS35/15




22-10AWG Wire


Installation Steps ①-②

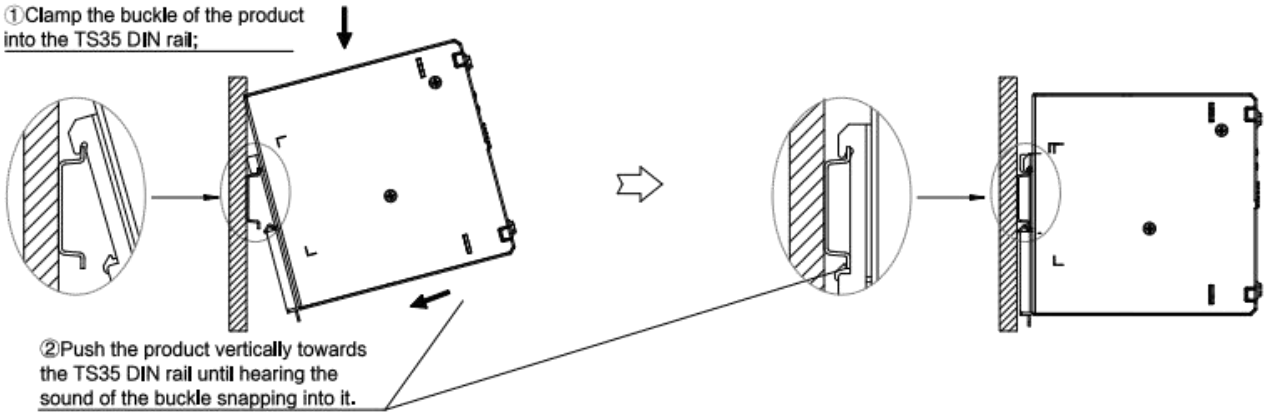

Disassembly Steps ③-④

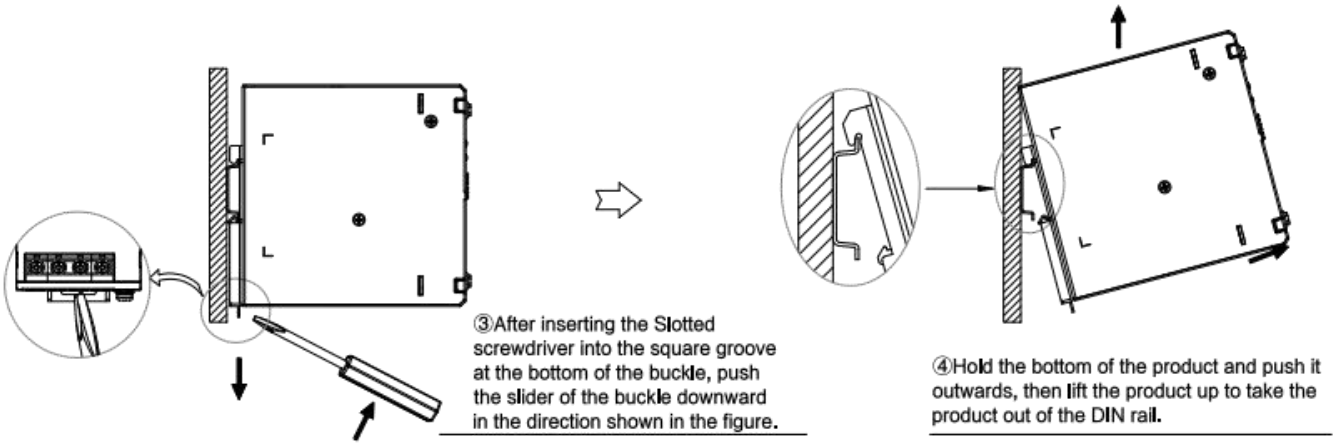


Wiring / Unwiring Steps ⑤-⑥

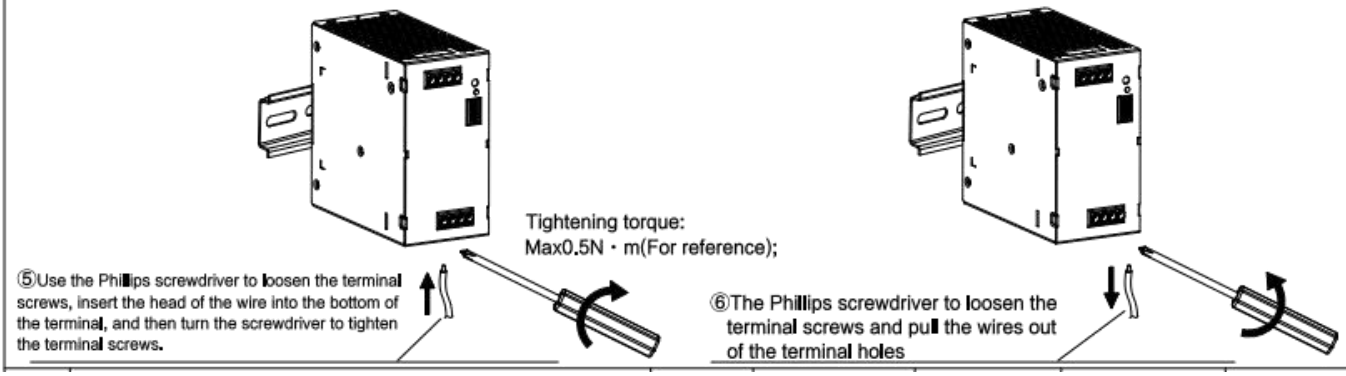


Dimensions and Recommended Layout

THIRD ANGLE PROJECTION

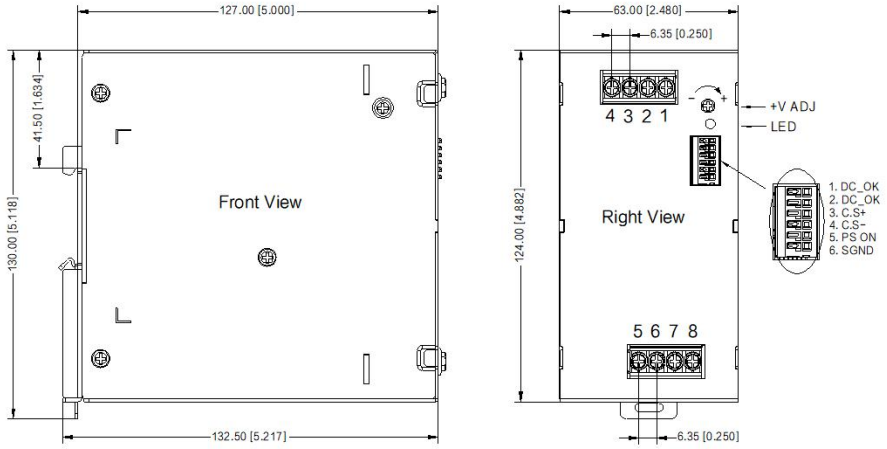

Pin-Out	
Pin	Mark
1	-Vo
2	-Vo
3	+Vo
4	+Vo
5	L1
6	L2
7	L3
8	⏚

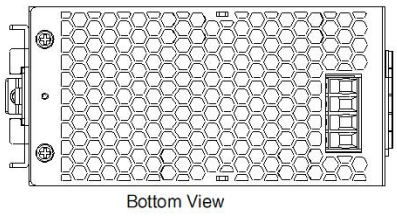

Note:
Unit: mm[inch]
ADJ: Output adjustable resistor
Wire range: Input: 22-10AWG
Output: 12V 10AWG
24V 14-10AWG
36V 16-10AWG
48V 18-10AWG
Signal: 22-18AWG
Input Tightening torque: 0.64 N·m ± 10%
Output Tightening torque: 0.64 N·m ± 10%
Mounting rail: TS35, rail needs to connect safety ground
General tolerances: ± 1.00[± 0.039]

WARNING Risk of electrical shock, fire, personal injury or death:

AVERTISSEMENT AVERTISSEMENT Risque de choc électrique, d'incendie, de blessures corporelles ou de décès :

1.Do not use the power supply without proper grounding (Protective Earth). Use the terminal on the input block for earth connection and not one of the screws on the housing;

N'utilisez pas l'alimentation électrique sans mise à la terre appropriée (Terre protectrice). Utilisez le terminal sur le bloc d'entrée pour la connexion terrestre et non pas une des vis sur le boîtier;

2.Turn power off before working on the device, protect against inadvertent re-powering;

Éteignez l'alimentation avant de travailler sur l'appareil, protégez-vous contre la réénergisation accidentelle;

3.Make sure that the wiring is correct by following all local and national codes;

Assurez-vous que le câblage est correct en suivant tous les codes locaux et nationaux;

4.Do not modify or repair the unit;
Ne modifiez pas ou ne réparez pas l'appareil;
5.Do not open the unit as high voltages are present inside;
Ne modifiez pas ou ne réparez pas l'appareil;
6.Use caution to prevent any foreign objects from entering the housing;
Faire preuve de prudence pour empêcher les objets étrangers d'entrer dans le logement;
7.Do not use in wet locations or in areas where moisture or condensation can be expected;
Faire preuve de prudence pour empêcher les objets étrangers d'entrer dans le logement;
8.Do not touch during power-on, and immediately after power-off, hot surfaces may cause burns;



Ne touchez pas pendant l'alimentation et, immédiatement après l'alimentation, les surfaces chaudes peuvent causer des brûlures.
9.Use copper conductors only;
N'utiliser que des conducteurs en cuivre;
10. OPEN EQUIPMENT: Adequate protection against contact with live parts and ingress of dust and water must be ensured through installation in a suitable enclosure(e.g. control cabinet, control box console or similar).

Note: The image certification marks are for reference only; please refer to the selection table for actual specifications. Certification is based on the physical mark or packaging label.

Note:
1.Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25℃, humidity<75% RH with nominal input voltage and rated output load;
2.The room temperature derating of 5℃/1000m is needed for operating altitude greater than 2000m;
3.All index testing methods in this datasheet are based on our company corporate standards;
4.In order to improve the efficiency at high input voltage, there will be audible noise generated, but it does not affect product performance and reliability;
5.Products are related to laws and regulations: see "Features" and "EMC";
6.The out case needs to be connected to the earth( )o⏚/stem when the terminal equipment in operating;
7.The output voltage can be adjusted by the ADJ, clockwise to increase;
8.Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units;
9.The power supply is considered a component which will be installed into a terminal equipment. All EMC tests should be confirmed with the final equipment. Please consult our FAE for EMC test operation instructions.