
DESCRIPTIONS 1500W, AC/DC Enclosed Switching Power Supply

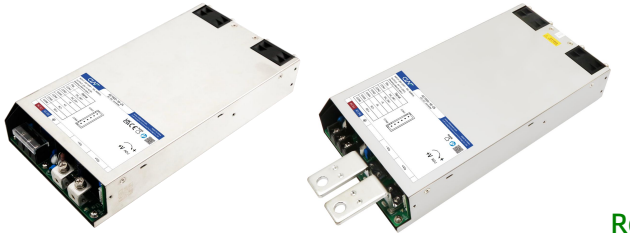

RoHS

CE Report UKCA Report

EN62368-1 BS EN62368-1

FEATURES

- Universal 180 - 277VAC or 250 - 380VDC Input voltage
- Accepts AC or DC input (dual-use of same terminal)
- Operating ambient temperature range: -40℃ to +70℃
- High reliability, efficiency up to 94%
- DC OK function
- High I/O isolation test voltage up to 4000VAC
- Output short circuit, over-current, over-voltage, over-temperature protection
- Operating altitude up to 5000m
- Over-voltage class II(designed to meet EN62368)
- Safety according to IEC62368

APPLICATIONS

- Industrial
- LED
- Street light control
- Electricity
- Security
- Telecommunications
- Smart home

Selection Guide

Certification	Part No.*	Cooling Method*	Output Power (W)*	nominal Output Voltage and Current (vo/Io)	Output Voltage Adjustable Range ADJ(V)	Efficiency at 230VAC (%) Typ.*	Max. Capacitive Load (μF)
EN/BS EN	AE1500-1B-05	Air blowing	1000	5V/200A	4.5-5.5	86.0	60000
	AE1500-1B-12		1500	12V/125A	11.4-13.8	91.0	40000
	AE1500-1B-15			15V/100A	14.25-17.25	91.0	20000
	AE1500-1B-24			24V/62.5A	22.8-27.6	93.0	10000
	AE1500-1B-27			27V/55.6A	25.65-31.05	93.0	8000
	AE1500-1B-36			36V/41.67A	34.2-41.4	93.0	6000
	AE1500-1B-48			48V/31.25A	45.6-55.2	94.0	5000
	AE1500-1B-54			54V/27.78A	51.3-58	94.0	4000

Note: 1.*Use suffix "QQ" for both sides conformal coating;

2.*Under any conditions, the total power of the product should not exceed the rated power. When the output voltage is increased, the total output power cannot exceed the rated output power, when the output voltage is decreased, the output current cannot exceed the rated output current;

3.*Wind blows from the outside into the product.

4.The product picture is for reference only.For details, please refer to the actual product.

Specifications

Product Specifications	Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Specifications	Input Voltage Range	Rated input (Certified voltage)		200	--	240	VAC
		AC input		180	--	277	
		DC input		250	--	380	VDC
	Input Voltage Frequency	Rated input (Certified voltage)		47	--	63	Hz
		AC input		47	--	63	
	Input Current	200VAC		--	10	--	A
		230VAC		--	8	--	
	Inrush Current	230VAC		--	40	--	
	Power Factor	230VAC		--	--	0.95	--
	Leakage Current	240VAC, 60Hz	Earth leakage current	--	--	5	mA
			Touch current	--	--	0.5	
	Hot Plug			Unavailable			
Output Specifications	Output Voltage Accuracy	Full load range	5V	--	±2.0	--	%
			12V/15V/24V/27V/36V/48V54V	--	±1.0	--	
	Line Regulation	Rated load		--	±0.5	--	
	Load Regulation	0% - 100% load	5V	--	±1.0	--	
			12V/15V/24V/27V/36V/48V54V	--	±0.5	--	
	Minimum Load			0	--	--	
	Ripple & Noise*	20MHz bandwidth (peak-peak value)	5V/12V/15V/24V/27V	--	--	150	mV
			36V/48V54V	--	--	200	
	Temperature Coefficient			--	±0.03	--	%/℃
	Hold-up Time	230VAC, rated load		--	12	--	ms
	Short Circuit Protection	Recovery time <30s after the short circuit disappear.		Turn off, continuous, self-recover			
	Over-current Protection	230VAC, rated load	Normal temperature, high temperature	130% - 200% Io, hiccup, constant current mode, shut down after 1s, self-recover			
			Low temperature	≥130% full load after derating, hiccup, constant current mode, shut down after 1s, self-recover			
	Over-voltage Protection	5V		≤6.75VDC (Output voltage hiccup, self-recover)			
		12V		≤16.2VDC (Output voltage hiccup, self-recover)			
		15V		≤25VDC (Output voltage hiccup, self-recover)			
		24V		≤35VDC (Output voltage hiccup, self-recover)			
		27V		≤35VDC (Output voltage hiccup, self-recover)			
		36V		≤50VDC (Output voltage hiccup, self-recover)			
		48V		≤63VDC (Output voltage hiccup, self-recover)			

			54V		≤63VDC (Output voltage hiccup, self-recover)			
	Over-temperature Protection		230VAC, 100% load	Over-temperature protection start	--	70	--	℃
				Over-temperature protection release	50(self-recover)	--	--	
General Specifications	Isolation Test	Input - ⏚	Electric strength test for 1min., leakage current <5mA		2000	--	--	VAC
		Input - output			4000	--	--	
		Output - ⏚			1250	--	--	
	Insulation Resistance	Input - ⏚	Ambient temperature: 25 ± 5℃ Relative humidity: < 95%RH, no condensation Test voltage: 500VDC		100	--	--	MΩ
		Input - output			100	--	--	
		Output - ⏚			100	--	--	
	Operating Temperature				-40	--	70	℃
	Storage Temperature				-40	--	85	
	Operating Humidity		Non-condensing		10	--	95	%RH
	Storage Humidity				20	--	90	
	Power Derating		Operating temperature derating	-40℃ to -30℃	5	--	--	%/℃
				+50℃ to +70℃	2	--	--	
			Input voltage derating	180VAC-200VAC	0.5	--	--	%/VAC
	Safety Class				CLASS I			
	MTBF		MIL-HDBK-217F@25℃		≥354,000 h			
	Warranty		Ambient temperature: <50℃		3 years			
Functional Specifications	DC_OK Signal		All input voltage range, all load range	Power on	80	90	95	%Vo
	Remote Sense		S-(CON3) and S+(CON4) of the terminal (CON) are remote compensation function pins connected to both ends of the output load (S+ is connected to Vo+, S- is connected to Vo-).					
	Remote Control Switch*		RC-(CON5) and RC+(CON6) of the terminal (CON) are the pins of the remote control switch function, and external voltage is required when used (RC+ is connected to external voltage positive electrode, RC- is connected to external voltage negative electrode).					
			All input voltage range, all load range	Power on	0	--	0.8	V
				Power off	4	--	10	
Mechanical Specifications	Case Material		SUS 304					
	Dimensions		250.00mm × 127.00mm × 40.50mm					
	Weight		5V		1740g (Typ.)			
			12V/15V		1550g (Typ.)			

		24V/27V/36V/48V/54V	1450g (Typ.)
	Cooling Method	Forced air cooling 17.15CFM	


Note: 1.*The "Tip and barrel method" is used for ripple and noise test, output parallel 47uF electrolytic capacitor and 0.1uF ceramic capacitor
2.*Power is on when the remote switch pins are left open.


Electromagnetic Compatibility (EMC)

Electromagnetic Compatibility (EMC)	Emissions (EMI)	CE (Input port)	CISPR32 EN55032 150K - 30MHz		CLASS A
		RE	CISPR32 EN55032 30MHz - 1GHz		CLASS A
	Immunity (EMS)	ESD	IEC/EN61000-4-2	Contact ±6KV/Air ±8KV	perf. Criteria A
		RS	IEC/EN61000-4-3	10V/m	
		EFT (Input port)	IEC/EN61000-4-4	±4KV	
		Surge (Input port)	IEC/EN61000-4-5	line to line ±2KV/line to ground ±4KV	
		MS	IEC/EN61000-4-8	30A/m	
		CS	IEC/EN61000-4-6	0.15 - 80MHz 20Vr.m.s	
		Voltage dips	IEC/EN61000-4-11	0% of 200Vac, 0Vac, 1 cycle	perf. Criteria C
				40% of 100Vac, 80Vac, 10/12 cycle(50/60Hz)	perf. Criteria C
				70% of 100Vac, 140Vac, 25/30 cycle(50/60Hz)	perf. Criteria B

Note: 1. *perf. Criteria:
A: The equipment shall continue to operate as intended without operator intervention;
B: After the test, the equipment shall continue to operate as intended without operator intervention;
C: Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions.
2.*The power supply does not meet the requirements of harmonic current stipulated in EN61000-3-2; This power supply is not suitable for the following situations.
1) The terminal equipment is used in the European Union.
2) The terminal equipment is connected to public mains supply with 220VAC or greater rated nominal voltage that mandatory to meet the requirements of EN61000-3-2.
3) The power supply is installed in terminal equipment with average or continuous input power greater than 75W.
4) The power supply belong to a part of lighting system.
In addition, the power supply can be used in the following terminals which do not need to meet EN61000-3-2;
(1) Professional equipment with total fixed input power greater than 1000W;
(2) symmetrical controlled heating element with rated power less than or equal to 200W.
3. *If no harmonic current is required or customers can solve harmonic current problems by themselves, this product can be used.


Characteristic Curve

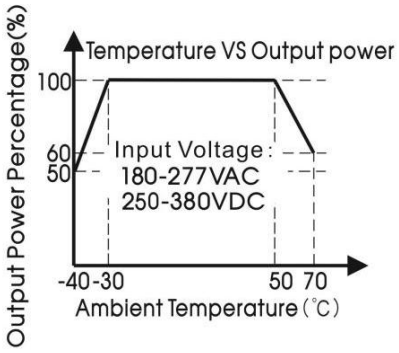


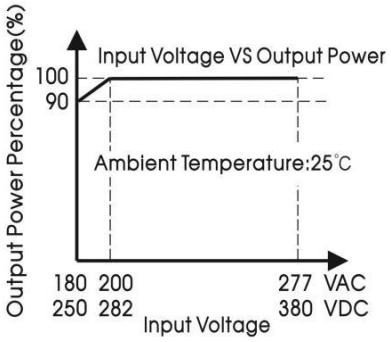

Note: 1. With an AC input voltage between 180-200VAC and a DC input between 254-282VDC the output power must be derated as per the temperature derating curves;


2. This product is suitable for applications using forced air cooling

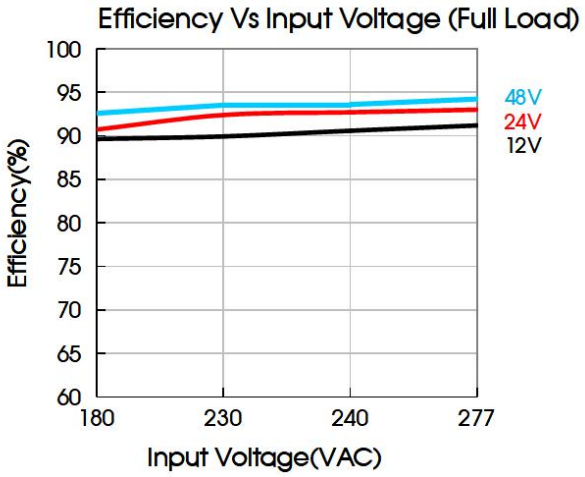

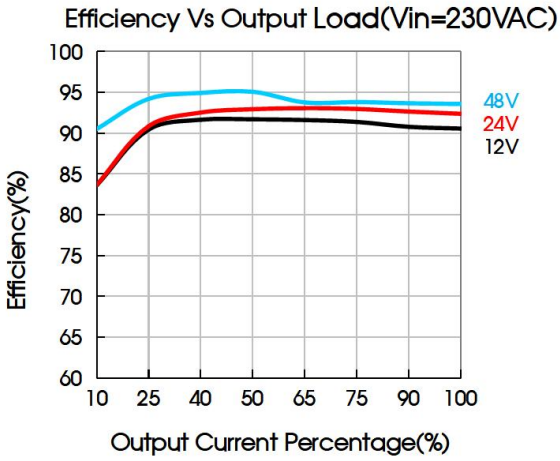

Typical Application

1.Remote ON/OFF

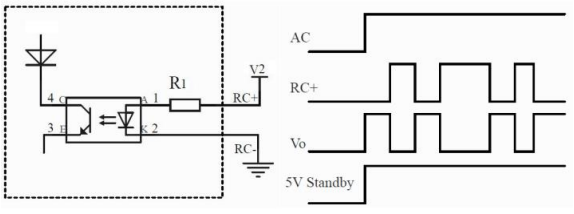


V2 (User side)	4V-10V

Note: 1. When the product is working normally, apply voltage (5-15V) to RC+ and RC- to trigger the remote ON/OFF function, and the output voltage will be off. Withdraw the voltage, the output voltage will be re-established;

2. 5V standby power supply is not controlled by remote ON/OFF function.

2.DC_OK

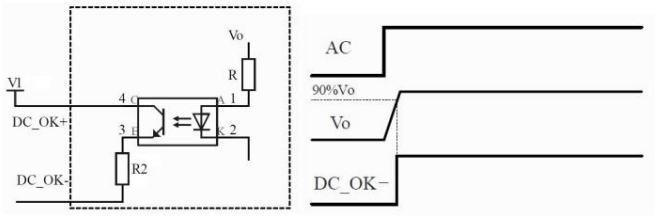


V1 (User side)	4V-10V

Note: 1. When the output voltage of the product reaches 90% of the rated value, DC_OK+ will be connected to DC_OK- ;

2. It is recommended that users apply a certain voltage between DC_OK+ and DC_OK- to detect the signal.

3.Remote Sense Compensation

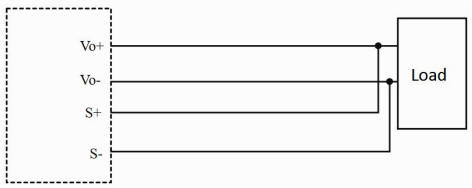


Note: 1. The dotted box represents the internal schematic diagram of the product, and the solid frame represents the customer system;

2. When the remote end is used for compensation, the S+ and S- leads are twisted pairs;

3. When the long-term matching is used to the 6PIN terminal function, the client needs to be dispensed and fixed.

Installation Diagram


Standard mounting orientation:

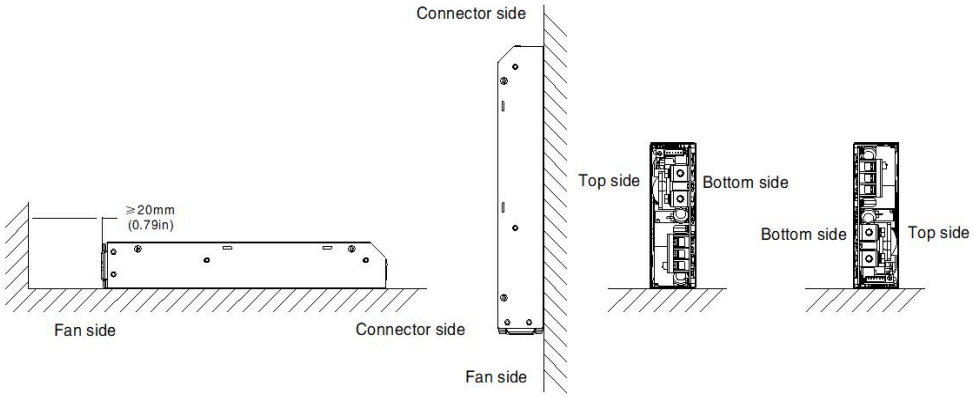


Note: The fan panel cannot be blocked by other objects, and a distance of at least 20mm must be maintained, otherwise it will affect the heat dissipation and performance of the power module.

Position of mounting holes:


Position	Screw Spec.	Length of locking screw L(max)	Torque(max)
① — ⑧	M3	3MM	0.4N • m



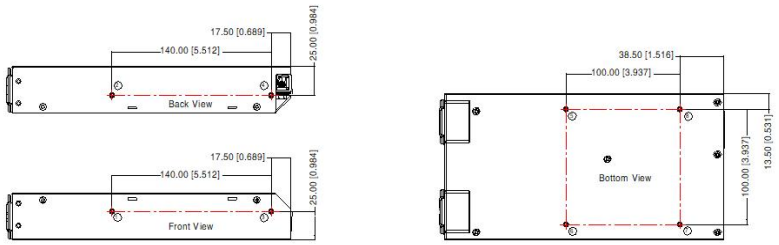

Dimensions and Recommended

AM1500-2DB05

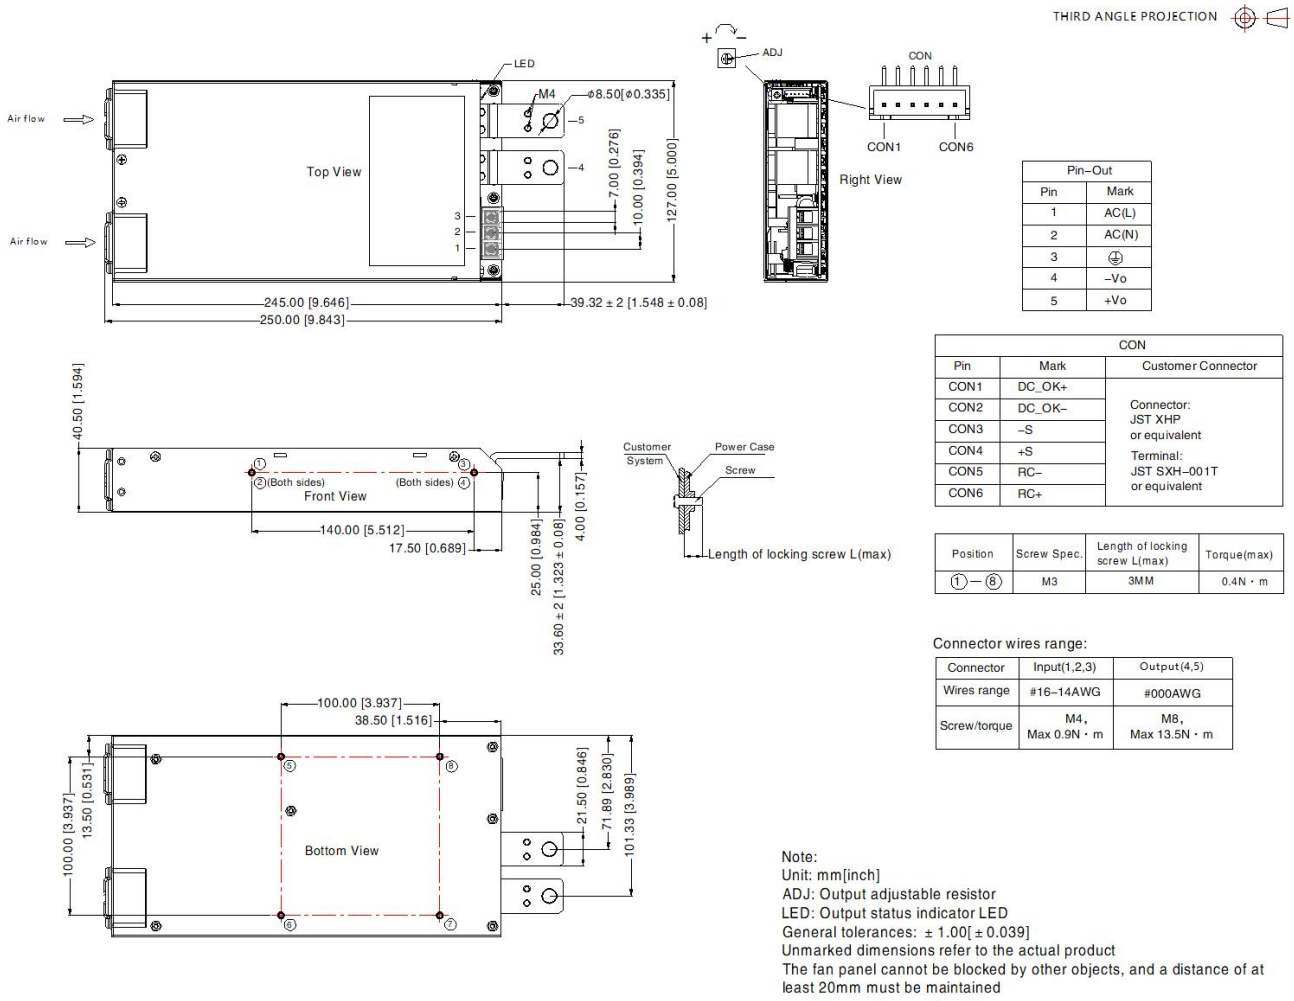

Pin–Out	
Pin	Mark
1	AC(L)
2	AC(N)
3	⏚
4	–Vo
5	+Vo

CON		
Pin	Mark	Customer Connector
CON1	DC_OK+	Connector: JST XHP or equivalent Terminal: JST SXH–001T or equivalent
CON2	DC_OK–	
CON3	–S	
CON4	+S	
CON5	RC–	
CON6	RC+	


Position	Screw Spec.	Length of locking screw L(max)	Torque(max)
①–⑧	M3	3MM	0.4N · m

Connector wires range:

Connector	Input(1,2,3)	Output(4,5)
Wires range	#16–14AWG	#000AWG
Screw/torque	M4, Max 0.9N · m	M8, Max 13.5N · m

Note:
Unit: mm[inch]
ADJ: Output adjustable resistor
LED: Output status indicator LED
General tolerances: ± 1.00[± 0.039]
Unmarked dimensions refer to the actual product
The fan panel cannot be blocked by other objects, and a distance of at least 20mm must be maintained

AM1500-2DB12/15/24/27/36/48/54

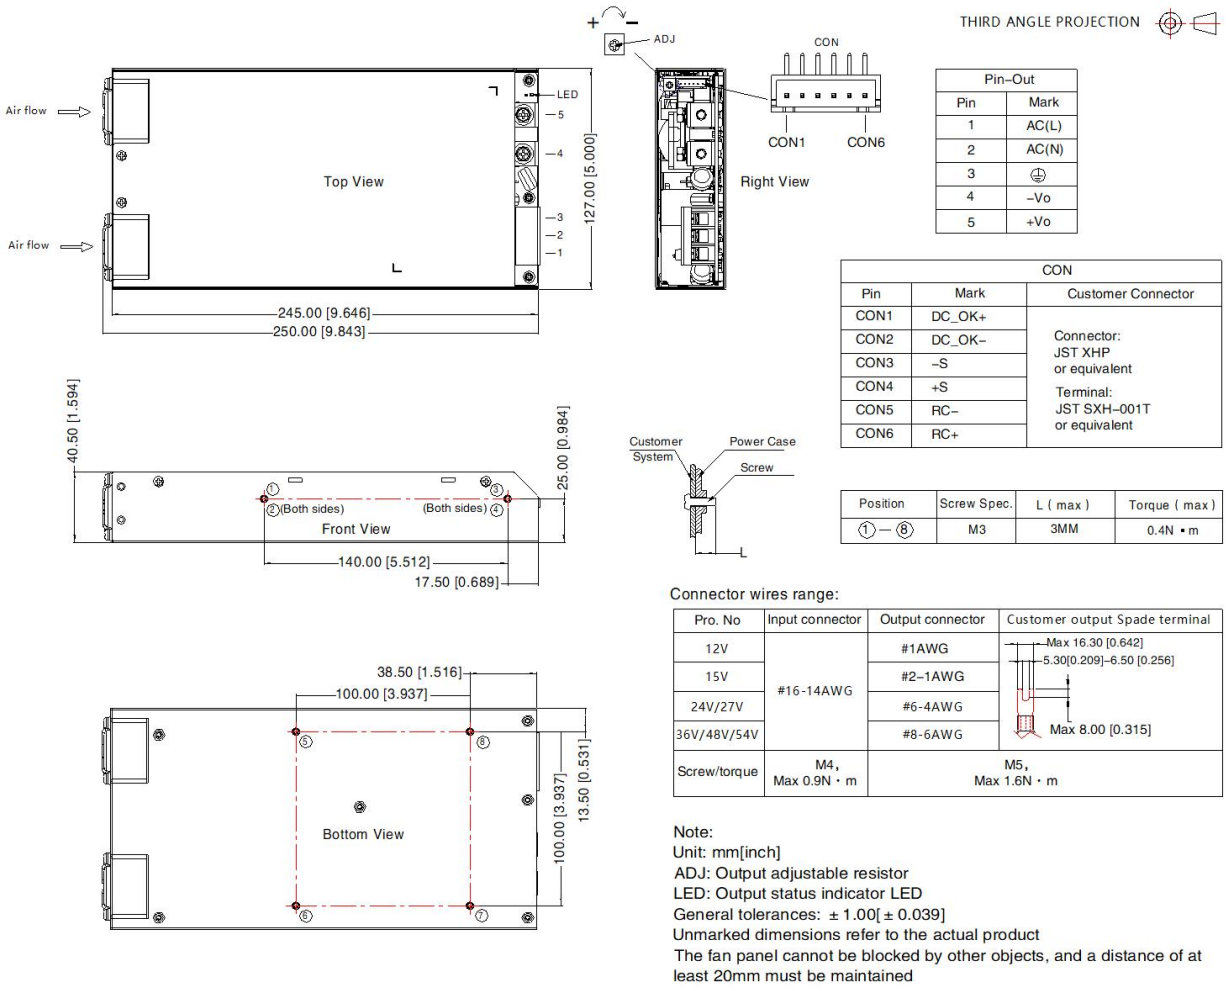

Pin–Out	
Pin	Mark
1	AC(L)
2	AC(N)
3	⏚
4	–Vo
5	+Vo

CON		
Pin	Mark	Customer Connector
CON1	DC_OK+	Connector: JST XHP or equivalent Terminal: JST SXH–001T or equivalent
CON2	DC_OK–	
CON3	–S	
CON4	+S	
CON5	RC–	
CON6	RC+	

Position	Screw Spec.	L (max)	Torque (max)
① – ⑧	M3	3MM	0.4N • m

Connector wires range:

Pro. No	Input connector	Output connector	Customer output Spade terminal
12V	#16-14AWG	#1AWG	Max 16.30 [0.642] 5.30[0.209]–6.50 [0.256] Max 8.00 [0.315]
15V		#2–1AWG	
24V/27V		#6-4AWG	
36V/48V/54V		#8-6AWG	
Screw/torque	M4, Max 0.9N · m	M5, Max 1.6N · m	

Note:
Unit: mm[inch]
ADJ: Output adjustable resistor
LED: Output status indicator LED
General tolerances: ± 1.00[± 0.039]
Unmarked dimensions refer to the actual product
The fan panel cannot be blocked by other objects, and a distance of at least 20mm must be maintained

Note:

1. Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25℃, humidity<75% RH with nominal input voltage and rated output load;
2. The room temperature derating of 5℃/1000m is needed for operating altitude greater than 2000m;
3. All index testing methods in this datasheet are based on our company corporate standards;
4. In order to improve the efficiency at high input voltage, there will be audible noise generated, but it does not affect product performance and reliability;
5. Products are related to laws and regulations: see "Features" and "EMC";
6. The out case needs to be connected to PE (⏚) of system when the terminal equipment in operating;
7. The output voltage can be adjusted by the ADJ, clockwise to increase;
8. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.
9. The power supply is considered a component which will be installed into a terminal equipment.