Descriptions

Residual current protection module



RoHS

3 Years Warranty

Features

- Type B (suitable for type A+6) residual current transducer for charging pile
- Meet the basic residual current operation characteristics of IEC 62423(GB/T 22794)
- Meets the requirements of IEC 62752(GB/T 41589) Mode 2 residual current operating characteristics
- Meets the residual current operating requirements of IEC 62955(GB/T 40820) mode 3 RDC-PD
- Integrated self-check function
- PCB installation, simple application

Applications

- Electric vehicle charger industry

Selection Guide

Part No.	Input Voltage (VDC)	Rated DC Residual Current (mA)	Rated AC Residual Current (mA)	Rated current (A)	Maximum Power Dissipation(W)
SBR6A-EP1S2VE	5	6	30	40	0.2

Specifications

Product Specifications	Item	Symbol	Min	Typ	Max	Unit.
Electrical Characteristics	Rated Residual DC Operating Current	$I_{\Delta NDC}$	--	6	--	mA
	Rated Residual AC Operating Current	$I_{\Delta NAC}$	--	30	--	
	Range of Remaining DC Operating Current	$I_{\Delta NDC\text{-}RANGE}$	3	4.5	6	
	Range of Remaining AC Operating Current	$I_{\Delta NAC\text{-}RANGE}$	15	24	30	
	Input Voltage	V_{DD}	4.85	5	5.15	V
	Operating Current	--	--	27	--	mA
Protection and Detection Characteristics	Self Check TEST_IN Input Low Level Voltage	$V_{TEST\text{-}IN\ IL}$	0	--	1	V
	Self Check TEST_IN Input High Level Voltage	$V_{TEST\text{-}IN\ IH}$	3	--	VDD	
	Calibrate the CAL input low-level voltage	$V_{CAL\text{-}IL}$	0	--	1	
	Calibrate the CAL input high level voltage	$V_{CAL\text{-}IH}$	4	--	VDD	
	Action TRIP outputs the low-level voltage	$V_{TRIP\text{-}OL}$	0	--	0.6	
	Action TRIP outputs a high level voltage	$V_{TRIP\text{-}OH}$	4.5	--	VDD	


Performance Characteristic	Item	Symbol	Residual Current Waveform	Min	Typ	Max	Unit.
	Operating Current	$I_{\Delta NAC50}$	50Hz AC	15	23	30	mA RMS
		$I_{\Delta NA0}$	50Hz 0 Angle Pulsating DC	4.5	15	42	
		$I_{\Delta NA90}$	50Hz 90 Angle Pulsating DC	6.3	23	42	
		$I_{\Delta NA135}$	50Hz 135 Angle Pulsating DC	3.3	28	42	
		$I_{\Delta NS\text{-}DC}$	Smooth DC	3	4.5	6	
		$I_{\Delta N2PDC}$	50Hz Two Phase Rectification DC	3.5	5.3	7	
		$I_{\Delta N3PDC}$	50Hz Three Phase Rectification DC	3.1	4.6	6.2	
		$I_{\Delta NF}$	Composite Current	15	33	42	
	Response Time	$T_{\Delta NAC50@30mA}$	RMS 30mA, Frequency 50Hz AC	--	60	200	ms
		$T_{\Delta NAC50@60mA}$	RMS 60mA, Frequency 50Hz AC	--	30	60	
		$T_{\Delta NAC50@150mA}$	RMS 150mA, Frequency 50Hz AC	--	15	40	
		$T_{\Delta NAC50@5A\text{-}100A}$	RMS 5A-100A, Frequency 50Hz AC	--	15	40	
		$T_{\Delta A0@42mA}$	RMS 42mA 0 Angle Pulsating DC	--	38	50	
		$T_{\Delta A0@84mA}$	RMS 84mA 0 Angle Pulsating DC	--	30	40	
		$T_{\Delta A0@210mA}$	RMS 210mA 0 Angle Pulsating DC	--	25	35	
		$T_{\Delta A0@42mA+S\text{-}DC@6mA}$	RMS 42mA 0 Angle Pulsating DC with 6mA Smooth DC	--	38	50	
		$T_{\Delta A0@84mA+S\text{-}DC@6mA}$	RMS 84mA 0 Angle Pulsating DC with 6mA Smooth DC	--	30	40	
		$T_{\Delta A0@210mA+S\text{-}DC@6mA}$	RMS 210mA 0 Angle Pulsating DC with 6mA Smooth DC	--	25	35	
		$T_{\Delta S\text{-}DC@6mA}$	6mA Smooth DC	--	300	600	
		$T_{\Delta S\text{-}DC@60mA}$	60mA Smooth DC	--	25	60	
		$T_{\Delta S\text{-}DC@300mA}$	300mA Smooth DC	--	25	30	
		$T_{\Delta 2/3PDC@60mA}$	RMS 60mA Two Phase/Three Phase Rectification DC	--	25	60	
		$T_{\Delta 2/3PDC@120mA}$	RMS 120mA Two Phase/Three Phase Rectification DC	--	20	30	

		$T_{\Delta 2/3PDC@300mA}$	RMS 300mA Two Phase/Three Phase Rectification DC	--	20	30	
		$T_{\Delta 2/3PDC@5A-100A}$	RMS 5A-100A Two Phase/Three Phase Rectification DC	--	15	30	
		$T_{\Delta F@210mA}$	RMS 210mA Composite Current	--	15	35	
Isolation Characteristics	Item		Operating Conditions	Min	Typ	Max	Unit.
	Isolation Test		Primary edge input, secondary output; 50Hz,1min; leakage current<1mA	--	--	3	kVAC
	Insulation Resistance		500VDC	1	--	--	GΩ
General Characteristics	Item		Symbol	Min	Typ	Max	Unit.
	Operating Temperature		Ta	-40	--	+105	℃
	Storage Temperature		Ts	-40	--	+105	
	Storage Humidity		Non-condensing	5	--	95	%RH
	Weight		m	--	17	--	g
	Vibration		20-150Hz, 2g (GB2423.10, IEC60068-2-6)				
	Overvoltage Category		OVC III (IEC61010)				

Electromagnetic Compatibility (EMC)

EMI	CE	CISPR32/EN55032 CLASS B	
	RE	CISPR32/EN55032 CLASS B	
EMS	ESD	IEC/EN61000-4-2 Contact ±6kV, Air ±8kV	perf. Criteria A
	RS	IEC/EN61000-4-4 ±2kV	perf. Criteria A
	Surge Current	2 turns, 5000V/2 Ω/2500A, total 5000A, 8/20us	perf. Criteria B


Product Characteristic Curve

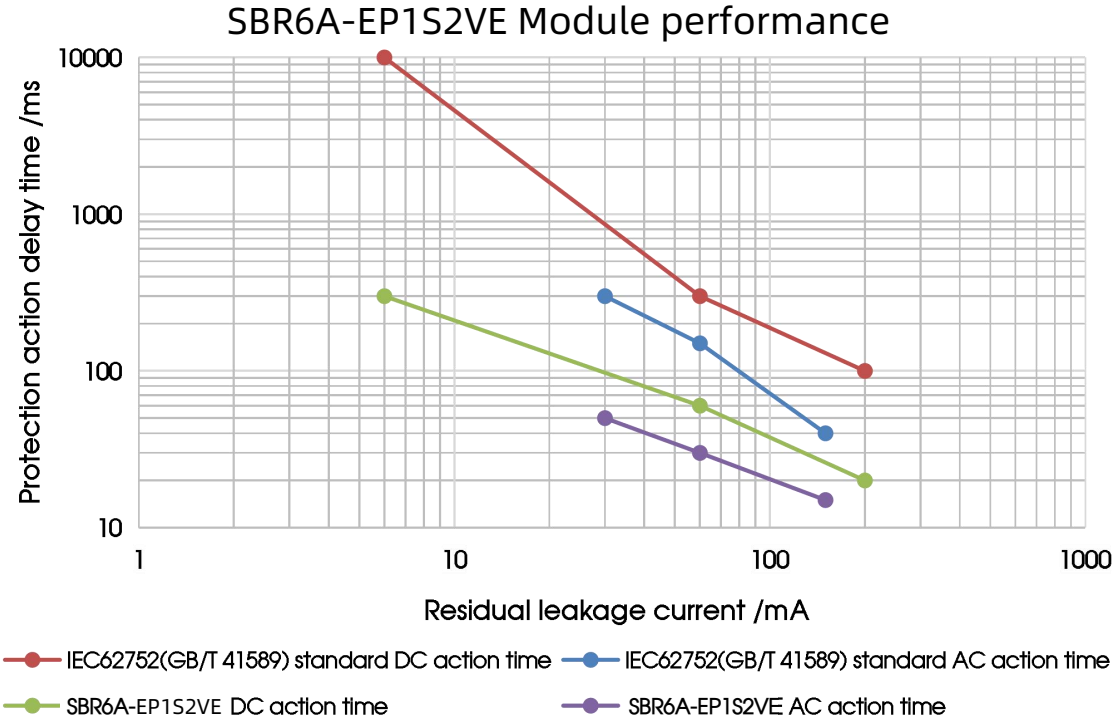

Pin Description

Pin	Mark	Description
1	NC	➢ No functional pin
2	CAL	➢ Zero calibration pin, when the pin inputs a duration low voltage, the calibration function is enabled and the residual current detected at the moment is used as the zero current point of the residual current compensated for subsequent detection. This residual current compensation value is stored internally and continues to be compensated upon reboot
3	TEST-IN	➢ Self-test test pin, when the pin input sustained high power level, the product will conduct a self-test test, so that TRIP output a high level pulse signal
4	VDD	➢ Product power supply pin ➢ Input voltage range is required to be 4.85-5.15V with 100nF and 1uF capacitors in parallel at the input end
5	GND	➢ Product power grounding pin
6	TRIP	➢ Trip output pin. When the residual current in the line is detected to exceed the threshold, the pin is set high to generate a trip signal
7-10	--	➢ For main wire connection

Connection and Description

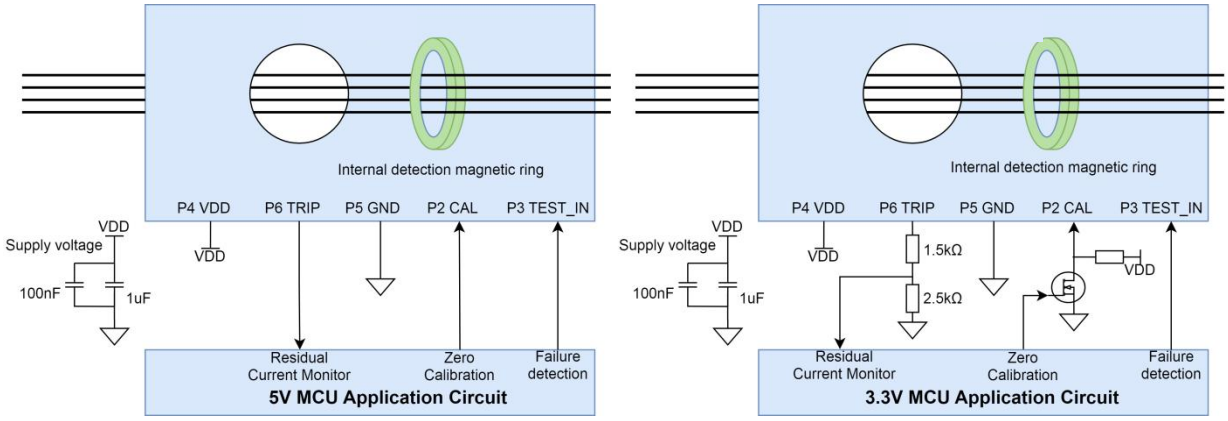

1. Two capacitors need to be connected between VDD at the product power supply end and GND at the product grounding end for energy storage and decoupling, respectively connecting 1uF/16V capacitor and 100nF/16V capacitor.

2. Residual current protection detection pin TRIP, zero calibration pin CAL, TEST pin test-IN are generally controlled by the microcontroller;

3. When the current value flowing through the internal detection magnetic ring exceeds the specification value, the residual current protection detection pin TRIP output high level;

4. When the module is started, it is recommended to keep the zero calibration pin CAL low for a period of time and then set the high level (see timing characteristic description) to carry out system calibration and eliminate system interference and residual current;

5. TEST pin test-IN is used to test the performance of the residual current protection module when self-test is required, and the test signal needs to meet the timing characteristics;

6. The product does not support hot swapping;

7. When the product is connected to 5V powered MCU, it is necessary to pay attention to level matching. If a 3.3V powered MCU is connected, the above level conversion circuit needs to be used for voltage conversion, and the 5V voltage is converted to 3.3V through two partial voltage resistors. Generally, the ratio of the two partial voltage resistors is close to 3:5. At the same time, the input impedance of the MCU should be considered, and the resistance value of the two partial voltages should not be greater than one-tenth of the input impedance of the MCU. For


example, the value of two partial voltage resistors can be 1.5kΩ and 2.5kΩ, or both 10 kΩ and 15 kΩ. At the same time, the zero-point calibration function needs to adjust the level logic. When the 3.3V periphery of the MCU is connected, the MOS tube is used for level conversion, and the opposite logic is used for control.

8. This product is susceptible to magnetic interference, it is recommended that the main circuit switching relay be placed away from the product.

Timing Characteristics

Item	Symbol	Min	Typ	Max	Unit.
Power-on stability time	T1	600	--	--	ms
Calibration instruction time	T2	50	75	100	
Complete internal calibration time	T3	--	500	--	
Self-check instruction duration	T4	600	--	--	

Timing Application Design

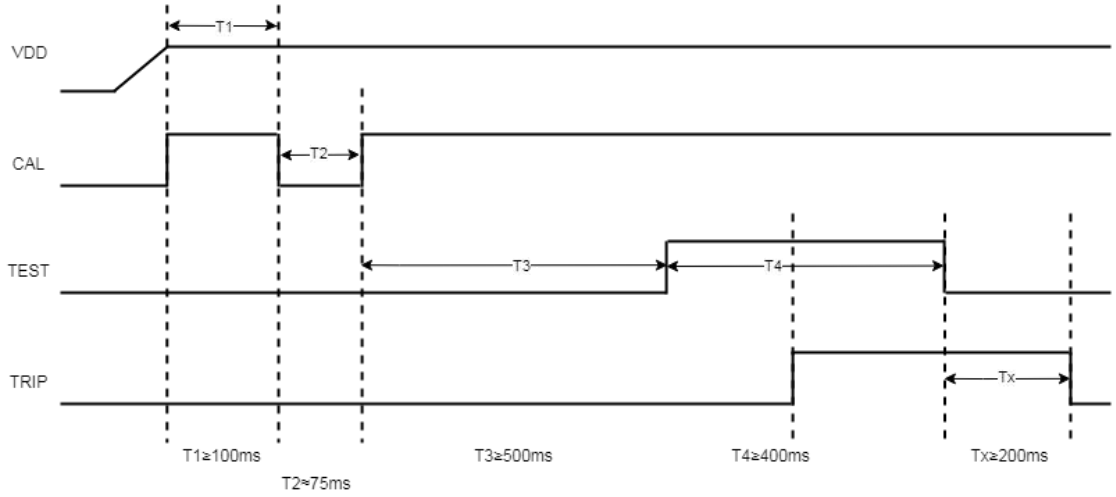

Design essentials:

1. It is recommended that the power supply VDD start from 0V, and the power-on process is monotonous without overshoot;
2. T1 indicates the stability period after power-on. Wait for T1 to reach 600ms or more;
3. T2 is the system calibration instruction time, calibration signal duration 50ms≤T2≤100ms, it is recommended that CAL duration T2 is 75ms;
4. T3 is the internal calibration time of the system, and the calibration signal duration is T3≥500ms;
5. T4 is the duration of system self-test instruction, and the test-IN self-test TEST signal can only be applied after T3 is completed. When the duration of test-IN signal is about 340ms, TRIP is set high, and it is recommended that the duration of self-test command signal T4≥600ms;
6. After setting the TRIP module to high level, the TEST IN can be set to low level. After turning off the TEST IN signal, after 200-300ms, the TRIP pin high level returns to low level. It is required to perform residual current detection after 350ms.


➢ Note:

① In the process of self-test and calibration, that is, (T1+T2+T3+T4) process, do not close the main loop charging switch, so as to avoid residual residual current after switching on affecting the module self-test and calibration function. After the self-check and calibration function is completed, the RCD module is judged to be normal when the TRIP pin is turned over to a high level, and the self-check signal is removed. After the TRIP pin returns to a low level, the subsequent residual current detection operation is carried out.

② After completing the above calibration and self-test after starting, it is not recommended to continue calibration and self-test during

normal operation. To avoid accidental leakage current detection and false tripping in the module, the self check signal time T4 is extended to ≥ 300ms after 5 seconds of module startup.

Dimensions and Recommended

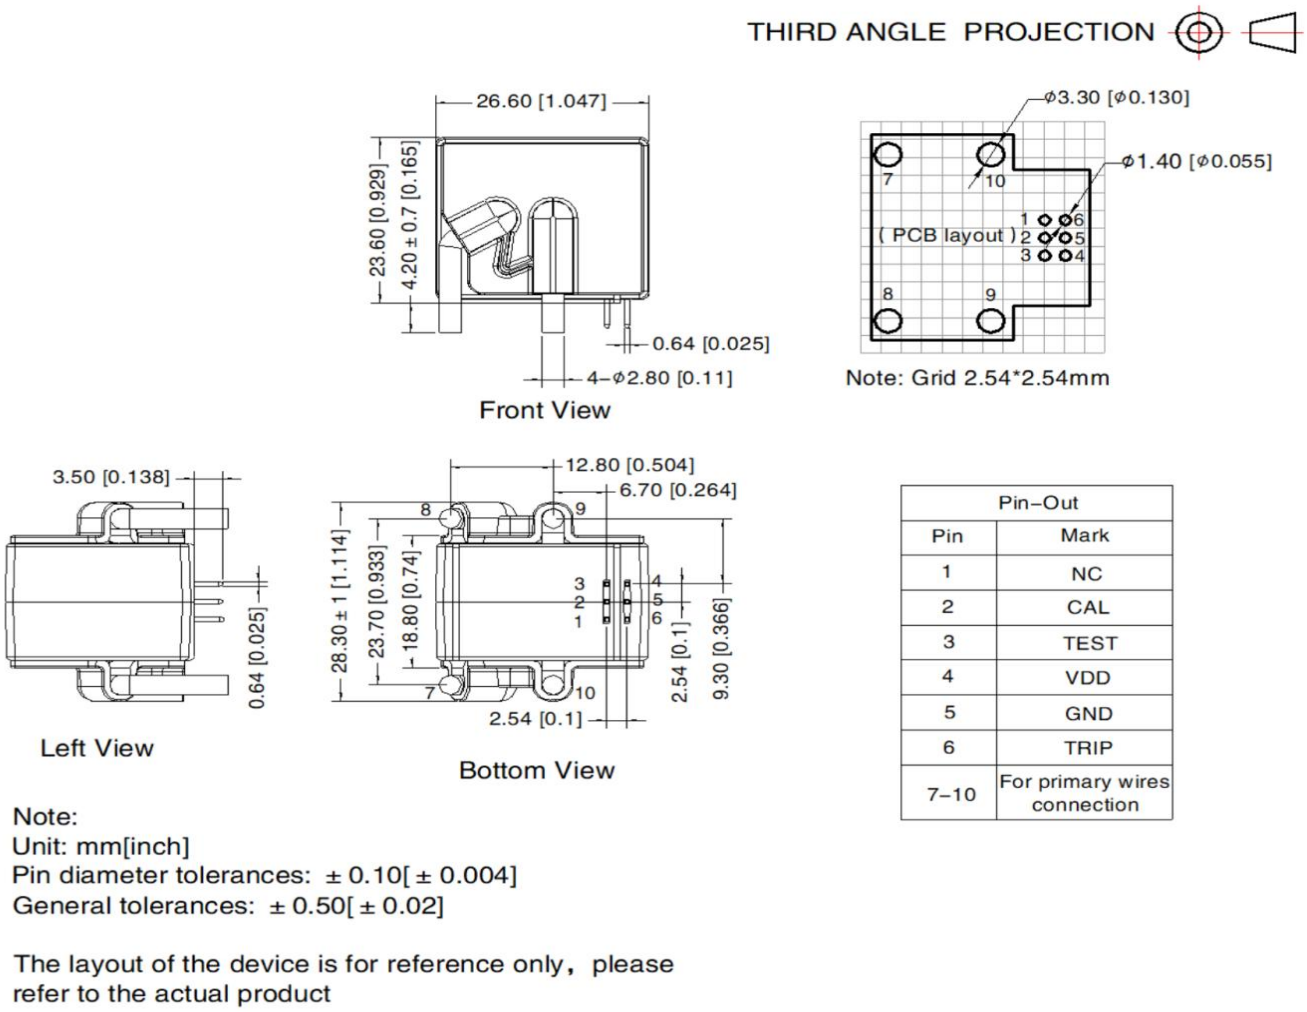

Pin–Out	
Pin	Mark
1	NC
2	CAL
3	TEST
4	VDD
5	GND
6	TRIP
7–10	For primary wires connection

Note:
Unit: mm[inch]
Pin diameter tolerances: ± 0.10[± 0.004]
General tolerances: ± 0.50[± 0.02]

The layout of the device is for reference only，please refer to the actual product

Notes:

1. All index testing methods in this datasheet are based on company corporate standards;
2. Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25℃, humidity<75%RH with nominal input voltage;
3. This products is used in electronic equipment, please follow the operation and instructions of the manual, and use it in a standard and safe environment;
4. Please do not install the product in a dangerous area; beware of the risk of electric shock during operating, some modules may generate dangerous voltages (such as primary wires, power supply wires);
5. This products is a build-in device, After installation, the conductive part must not be touched completely. A protective box or shield can be used;
6. It is strictly forbidden to disassemble and assemble the products privately to prevent equipment without failure or malfunction;
7. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.