AEUH200-1B-xx Series

DESCRIPTIONS

200W, AC/DC Enclosed Switching Power Supply



RoHS

FEATURES

- Universal 176 - 305VAC or 240 - 430VDC Input voltage
- Accepts AC or DC input (dual-use of same terminal)
- Semi-potted process, fanless design
- Operating ambient temperature range: -40℃ to +85℃
- High I/O isolation test voltage up to 4000VAC
- Efficiency up to 93%
- Output short circuit/over-current/over-voltage protection, over-temperature protection
- Operating altitude up to 5000m

APPLICATIONS

- Industrial
- Lighting
- Electricity
- Security
- Telecommunications

Selection Guide

Certification	Part No.	Output Power (W)	Nominal Output Voltage and Current (Vo/Io)	Output Voltage Adjustable Range (V)*	Efficiency at 230VAC (%) Typ.	Max. Capacitive Load (μF)
--	AEUH200-1B-12	200.4	12V/16.7A	11.4-12.6	92	8000
	AEUH200-1B-24	201.6	24V/8.4A	22.8-25.2	93	5000
	AEUH200-1B-28	200.2	28V/7.15A	26.6-29.4	93	4000

Note:

1. *The product picture is for reference only. For details, please refer to the actual product;
2. *Under any steady-state conditions, the total power of the product should not exceed the rated power. When the output voltage is increased, the total output power cannot exceed the rated output power, when the output voltage is decreased, the output current cannot exceed the rated output current;
3. *Output voltage adjustable range test conditions: 230VAC/50% lo;
4. *For products with terminal cover, please order "CPJ-062" for self-installation.

Specifications

Product Specifications	Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Specifications	Input Voltage Range	Rated input (Certified voltage)	200	--	277	VAC
		AC input	176	--	305	
		DC input	240	--	430	VDC

	Input Voltage Frequency	Rated input (Certified voltage)		50	--	60	Hz
		AC input		47	--	63	
	Input Current	Rated input (Certified voltage)		--	--	3	A
		230VAC		--	--	3	
	Inrush Current	230VAC	Cold start	--	80	--	
	Start-up Delay Time			--	--	1	s
	Input Fuse	Built-in fuse		6.3A/300VAC			
	Hot Plug			Unavailable			
Output Specifications	Output Voltage Accuracy	Full load range		--	±1	--	%
	Line Regulation	Rated load		--	±0.5	--	
	Load Regulation	0% - 100% load		--	±0.5	--	
	Minimum Load			0	--	--	
	Ripple & Noise*	20MHz bandwidth (peak-peak value)		--	--	240	mV
	Stand-by Power Consumption	230VAC		--	--	3	W
	Temperature Coefficient			--	±0.03	--	%/℃
	Hold-up Time	230VAC, rated load		--	10	--	ms
	Short Circuit Protection	After the short circuit disappears, the recovery time is less than 3s		Hiccup, continuous, self-recover			
	Over-current Protection			≥120% Io, hiccup, self-recover			
	Over-temperature Protection	Triggered range: 230VAC, 100% Io, 51℃ to 85℃ 230VAC, >50% Io, 70℃ to 85℃		Hiccup, self-recover after over-temperature fault elimination			
	Over-voltage Protection	12V		≤16V (Output voltage hiccup, self-recover)			
		24V/28V		≤35V (Output voltage hiccup, self-recover)			
General Specifications	Isolation	Input - ⏚	Electric strength test for 1min., leakage current <5mA	2000	--	--	VAC
		Input - output		4000	--	--	
		Output - ⏚		1250	--	--	
	Insulation Resistance	Input - ⏚	Ambient temperature: 25 ± 5℃ Relative humidity: < 95%RH, no condensation Test voltage: 500VDC	100	--	--	MΩ
		Input - output		100	--	--	
		Output - ⏚		100	--	--	
	Leakage Current	277VAC	Touch current	--	--	0.5	mA
	Operating Temperature			-40	--	+85	℃
	Storage Temperature			-40	--	+85	
	Operating Humidity	Non-condensing		20	--	90	%RH
	Storage Humidity			10	--	95	
	Power Derating	Operating	-40℃ to -30℃	4	--	--	%/℃

		temperature derating (With aluminum plate)	+50℃ to +70℃	2	--	--	
			+70℃ to +85℃	2	--	--	
		Operating temperature derating(Without aluminum plate)	-40℃ to -30℃	4	--	--	
			+40℃ to +50℃	2	--	--	
			+50℃ to +70℃	2	--	--	
			+70℃ to +85℃	1.33	--	--	
		Input voltage derating	176VAC-200VAC	1.66	--	--	%/VAC
			277VAC-305VAC	0.715	--	--	
		Altitude derating	2000m - 5000m	5			%/Km
	Safety Class			CLASS I			
	MTBF	MIL-HDBK-217F@25℃		≥300,000 h			
Mechanical Specifications	Case Material	Metal (AL5052, SGCC)					
	Dimensions	194.00mm x 55.00mm x 26.00 mm					
	Weight	380g (Typ.)					
	Cooling Method*	With aluminum plate heat dissipation					

Note:

1. *The "Tip and barrel method" is used for ripple and noise test, output parallel 47uF electrolytic capacitor and 0.1uF ceramic capacitor,
2. *Cooling mode and power derating parameter product characteristic curve;
3. In order to optimize the heat dissipation performance, when the aluminum plate is used for auxiliary heat dissipation, please note: (1) The size of the aluminum plate is 300mm × 300mm × 3mm; (2) The surface of the aluminum plate mast be coated with thermal grease; (3) The product must be tightly attached to the aluminum plate.

Electromagnetic Compatibility (EMC)

Electromagnetic Compatibility (EMC)	Emissions (EMI)	CE	CISPR32/EN55032 CLASS A		
		RE	CISPR32/EN55032 CLASS A		
	Immunity (EMS)	ESD	IEC/EN61000-4-2 Contact ±6KV/Air ±8KV		perf. Criteria A
		RS	IEC/EN61000-4-3 10V/m		
		EFT	IEC/EN61000-4-4 ±4KV		
		Surge*	IEC/EN61000-4-5 Line to line ±2KV/line to PE ±4KV		
		CS	IEC/EN61000-4-6 10Vr.m.s		
		MS	IEC/EN61000-4-8 30A/m		
		Voltage variations	IEC61000-6-2/IEC61000-4-11	70% Un, 25/30 cycle(50/60Hz) 40% Un, 0/12 cycle(50/60Hz) 0% Un, 1 cycle	perf. Criteria B
		Short interruptions *	IEC61000-6-2/IEC61000-4-11	0% Un, 250/300 cycle(50/60Hz)	perf. Criteria C

Note:

1. *perf. Criteria:

A: The equipment shall continue to operate as intended without operator intervention;

B: After the test, the equipment shall continue to operate as intended without operator intervention.

2. *This power supply does not meet the harmonic current requirements specified in EN61000-3-2.

Please do not use this power supply under the following conditions:

(1) The terminal equipment is used in the European Union.

(2) Supporting terminals are connected to a public power grid with 220VAC or a higher voltage that comply with the requirements of EN61000-3-2.

(3) The power supply is installed in terminal equipment with average or continuous input power greater than 75W.

(4) The power supply belong to a part of lighting system.

Exception: The power supply used in the following terminal equipment does not need to meet EN61000-3-2.

(1) Professional equipment with a total rated input power greater than 1000W.


(2) Symmetrically controlled heating element with a rated power less than or equal to 200W.


3. *If no harmonic current is required or customers can solve harmonic current problems by themselves, this product can be used.

4. *Un is the maximum input nominal voltage.


Characteristic Curve


With aluminum plate

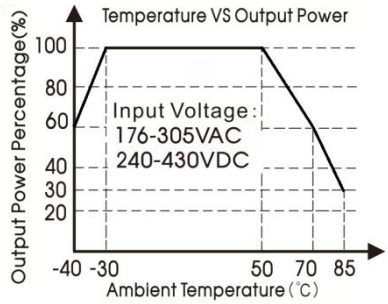

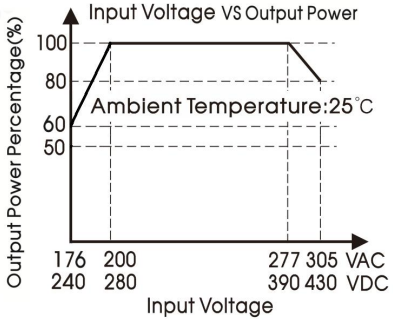

Without aluminum plate

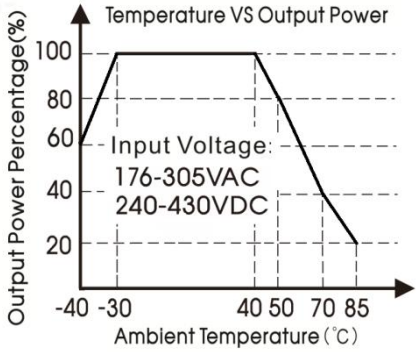


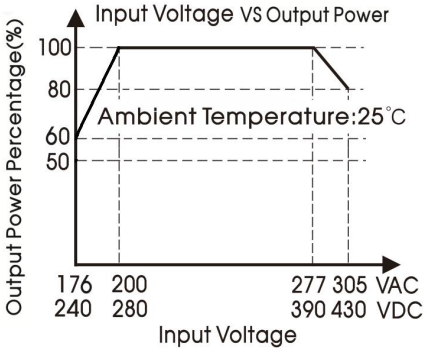


Note:


1. With an AC input voltage between 176 -200VAC/277-305VAC and a DC input between 240-280VDC/390-430VDC the output power must be derated as per the temperature derating curves;

2. This product is suitable for applications using nature air cooling;.

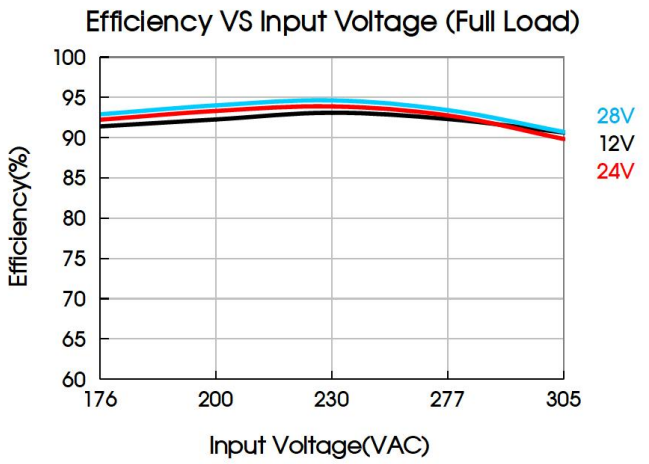

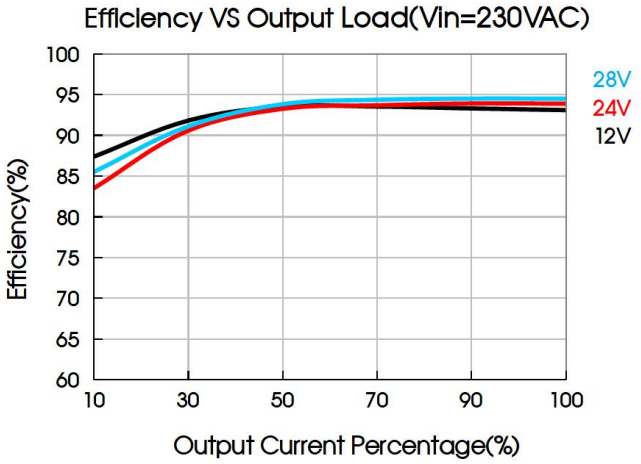


Installation Diagram

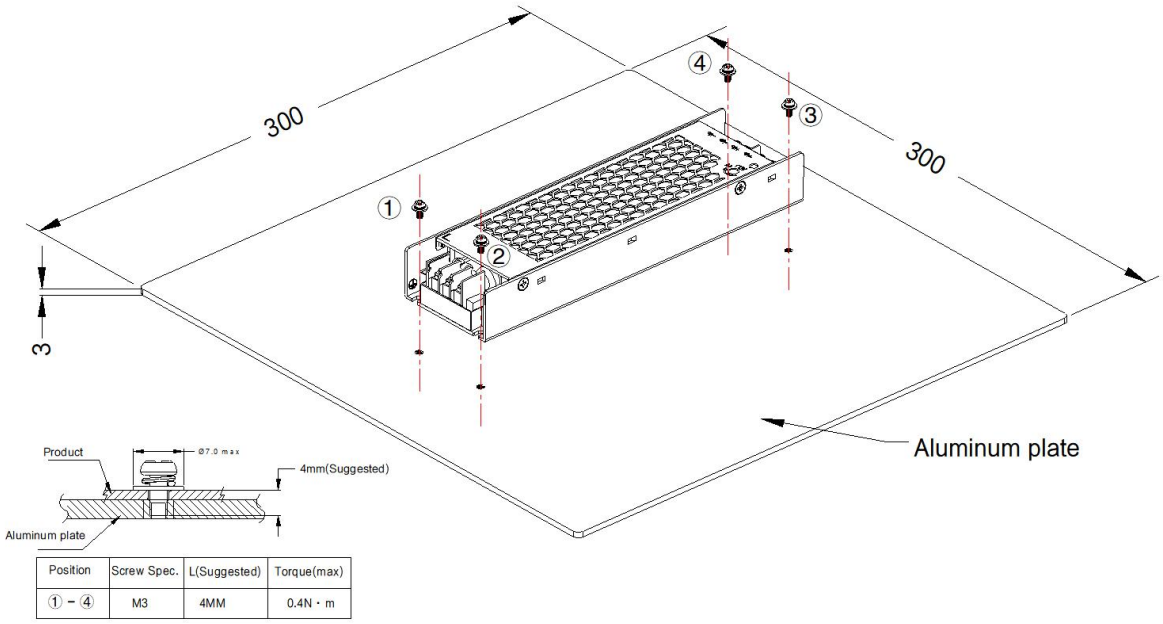

Position	Screw Spec.	L(Suggested)	Torque(max)
① ~ ④	M3	4MM	0.4N · m

Note: 1. In order to meet the "Derating Curve", the product testing must be installed onto an aluminum plate. The size of the suggested aluminum plate is shown as above. And for optimizing thermal performance, it is necessary to apply thermal grease on the bottom of the product.
2. It is suggested to install the product with M3 x 5 combination screws, and the product must be firmly installed at the center of the aluminum plate.

Dimensions and Recommended

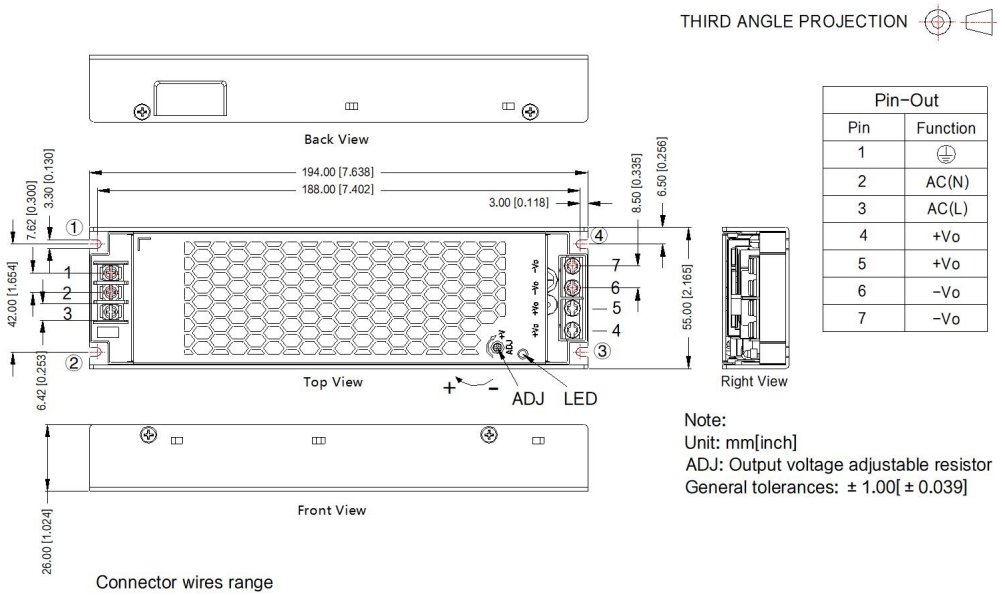

Pin-Out	
Pin	Function
1	⏚
2	AC(N)
3	AC(L)
4	+Vo
5	+Vo
6	-Vo
7	-Vo

Connector wires range

Pro. No	Input connector	Output connector (single wire)	Output connector (double wires)	Output connector (double wires) Pic.
12V	22-14AWG	14-12AWG	18-12AWG	-Vo double wires +Vo double wires
24/28V		18-12AWG	20-12AWG	
Screw/torque	M3.0, Max 0.5N · m	M3.5, Max 0.8N · m		

Note:

1. Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25℃, humidity <75%RH with nominal input voltage and rated output load;
2. All index testing methods in this datasheet are based on our company corporate standards;
3. In order to improve the efficiency at high input voltage, there will be audible noise generated, but it does not affect product performance and reliability;
4. The room temperature derating of 5℃/1000m is needed for operating altitude greater than 2000m;
5. We can provide product customization service, please contact our technicians directly for specific information;
6. Products are related to laws and regulations: see "Features" and "EMC";
7. The out case needs to be connected to PE (⏚) of system when the terminal equipment in operating;
8. The output voltage can be adjusted by the ADJ, clockwise to increase;
9. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units;
10. The power supply is considered a component which will be installed into a terminal equipment. All EMC tests should be confirmed with the final equipment;