Descriptions

500W isolated，DC/DC Converter





RoHS

CE Report EN62368-1

UKCA Report BS EN62368-1

Features

- Wide 2:1 input voltage range
- High efficiency up to 94%
- I/O isolation test voltage 2.25k VDC
- Input under-voltage protection, output short-circuit, over-current, over-voltage, over-temperature protection
- Parallel current sharing function
- Shell operating temperature range Tc:-40℃ to +100℃
- Industry standard 1/2 brick

Applications

- Industrial control
- Power
- Instrumentation
- Communication
- Battery powered systems
- Intelligent robotic

Selection Guide

Certification	Part No.	ON/OFF logic①	Input Voltage (VDC)		Output		Full Load Efficiency (%) Min./Typ.	Capacitive Load (μF)Max.	Capacitive Load (μF)③ Min.
			Nominal (Range)	Max.②	Voltage (VDC)	Current(mA) Max./Min.			
EN/BS EN	DEHB500-F2412N	N	24 (18-36)	40	12	42000/0	91/93	12000	470
	DEHB500-F2415N				15	34000/0	92/94	10000	
	DEHB500-F2424N				24	21000/0	91/93	6000	
	DEHB500-F2428N				28	18000/0	92/94	5000	

Note:
①"P" means positive logic, "N" means negative logic;
②Exceeding the maximum input voltage may cause permanent damage;
③In order to ensure the stability of the output voltage, the output side of the product must be connected with a minimum capacitive load;
④Product images are for reference only; the actual product shall prevail.

Specifications

Product Specifications	Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Specifications	Input Current (full load / no-load)	24VDC input	12V, 24V output	--	22581/340	23077/380	mA
			15V, 28V output	--	22607/340	23098/380	
	Reflected Ripple Current	24VDC input		--	500	--	
	Surge Voltage (1sec. max.)			-0.7	--	50	VDC
	Start-up Voltage			--	--	18	
	Input under-voltage protection			15.5	--	--	
	Start-up Time	Nominal input voltage & constant resistance load		--	--	100	ms
	Input Filter			Capacitance filter			
	Hot Plug			Unavailable			
	ON/OFF①	Module on		ON/OFF pin open or pulled high (TTL 3.5-12VDC)			
		Module off		ON/OFF pin pulled low to GND (0-1.2VDC)			
		Input current when off		--	25	40	mA
Output Specifications	Voltage Accuracy	0% -100% load		--	±1	±3	%Vo
	Linear Regulation	Input voltage variation from low to high at full load		--	±0.2	±0.5	
	Load Regulation	5% -100% load		--	±0.25	±0.75	
	Transient Recovery Time	25% load step change, 2A/us		--	300	500	μs
	Transient Response Deviation			--	±3	±5	%Vo
	Temperature Coefficient	Nominal full load		--	--	±0.03	%/℃
	Ripple & Noise②	24VDC nominal input voltage 20MHz bandwidth, 5%-100% load	12V, 15V output	--	--	150	mVp-p
			24V, 28V output	--	--	220	
	Parallel current sharing accuracy③	24VDC nominal input voltage, 100% load, 2pcs parallel		--	±8	±10	%Io
	Trim	Input voltage range		90	--	110	%Vo
	Sense			--	--	110	
	Over-voltage Protection			110	115	130	
	Over-current Protection			110	115	130	%Io
	Short circuit Protection			Hiccup, continuous, self-recovery			
	Over-temperature Protection	Product surface temperature		--	110	120	℃
General Specifications	Isolation	Input-output Electric Strength Test for 1 minute with a leakage current of 1mA max.		2250	--	--	VDC
		Input/output-Case Electric Strength Test for 1 minute with a leakage current of 1mA max.		2250	--	--	
	Insulation Resistance	Input-output resistance at 500VDC		100	--	--	MΩ
	Isolation Capacitance	Input-output capacitance at 100KHz/0.1V		--	3000	--	pF
	Operating Temperature	Shell temperature Tc		-40	--	+100	℃

	Storage Temperature		-55	--	+125	
	Pin Soldering Resistance Temperature④	Soldering spot is 1.5mm away from the case, 10 seconds max.	--	--	+300	
		Wave soldering, maximum 10 seconds	255	260	265	
	Storage Humidity	Non-condensing	5	--	95	%RH
	Vibration		10-150Hz, 5G, 0.75mm. along X, Y and Z			
	Switching Frequency	PWM mode	--	280	--	kHz
	MTBF	MIL-HDBK-217F@25℃	1000	--	--	k hours
Mechanical Specifications	Case Material	Aluminum alloy + black flame retardant and heat resistant plastic				
	Dimensions	61.00 × 57.90 × 12.70 mm				
	Weight	130.0g (Typ.)				
	Cooling Method	Free air convection or forced convection				


Note:
①The ON/OFF pin voltage is referenced to input -Vin.
②Under 0% -5% load conditions, ripple & noise does not exceed 5%Vo. The "Tip and barrel method" is used for ripple and noise test, output parallel 1uF ceramic capacitor+10uF tantalum capacitor+minimum capacitive load;
③Number of parallel connections: 4pcs max, the current sharing accuracy is only for reference when 2pcs products are connected in parallel;
④The pin soldering temperature tolerance is not the actual temperature set by the soldering iron but the temperature required for proper solder joints. The actual temperature set by the customer should be determined comprehensively based on factors such as PCB thickness, copper coverage, soldering iron power, and soldering iron tip selection.

Electromagnetic Compatibility (EMC)


Emissions	CE	CISPR32/EN55032 CLASS A (additional circuit) (see Fig.4 for recommended circuit)	
	RE	CISPR32/EN55032 CLASS A (additional circuit) (see Fig.4 for recommended circuit)	
Immunity	ESD	IEC/EN61000-4-2 Contact ±6kV, Air ±8kV	perf. Criteria B
	RS	IEC/EN61000-4-3 10V/m (see Fig.4 for recommended circuit)	perf. Criteria A
	EFT	IEC/EN61000-4-4 ±2kV (see Fig.4 for recommended circuit)	perf. Criteria A
	Surge	IEC/EN61000-4-5 line to line ±2kV (see Fig.4 for recommended circuit)	perf. Criteria B
	CS	IEC/EN61000-4-6 10 Vr.m.s (see Fig.4 for recommended circuit)	perf. Criteria A

Typical Characteristic Curves


DEHB500-F2412N

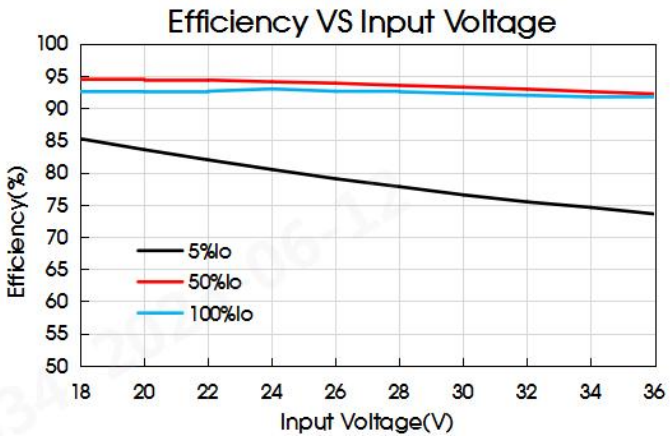


DEHB500-F2412N

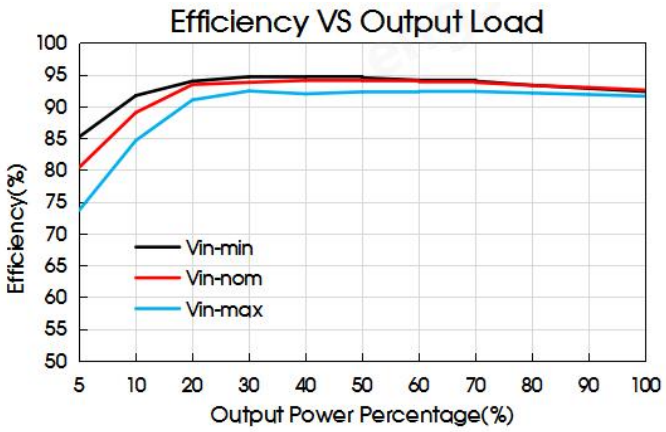


DEHB500-F2415N

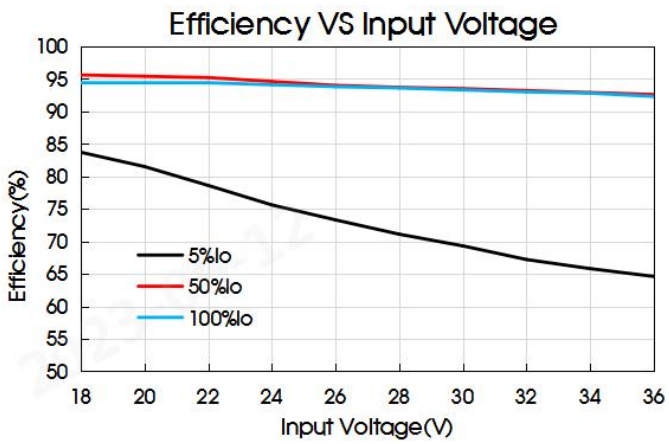


DEHB500-F2415N

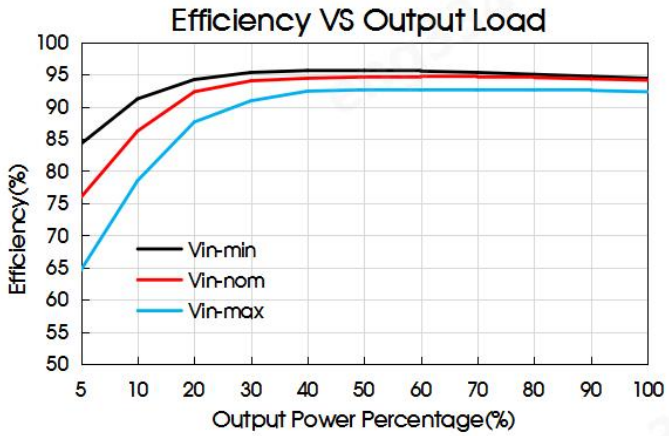


DEHB500-F2424N

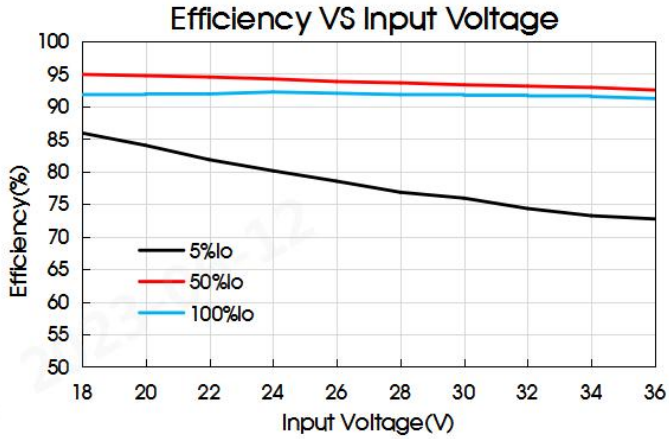


DEHB500-F2424N

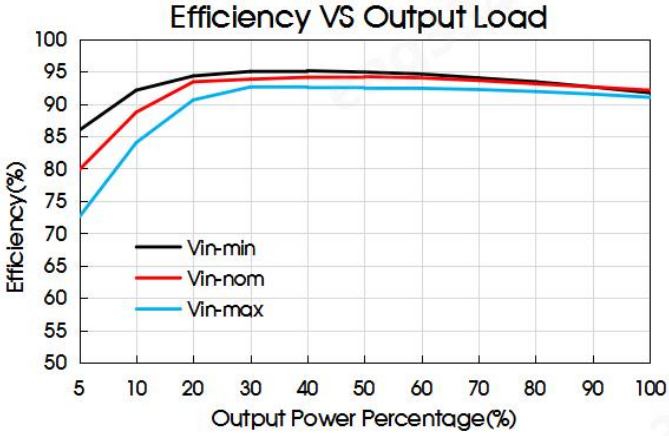

DEHB500-F2428N

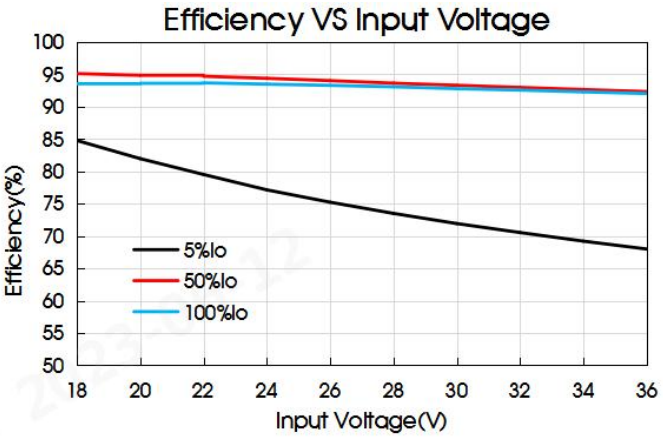


DEHB500-F2428N

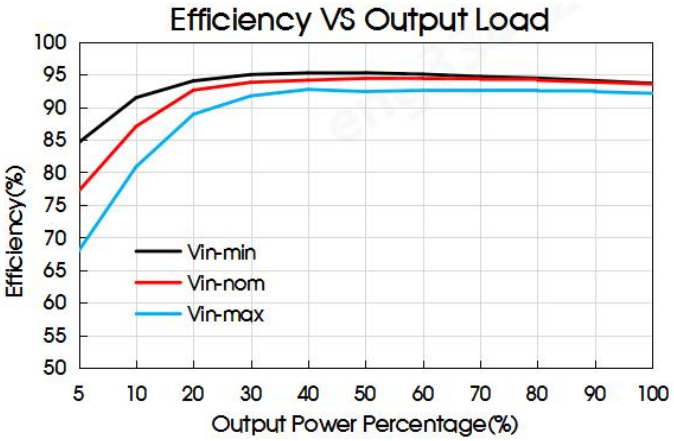


DEHB500-F2412N

Temperature Derating Curve

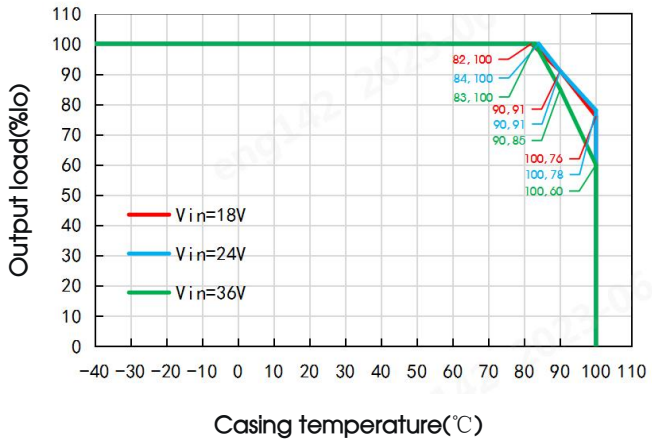


DEHB500-F2415N

Temperature Derating Curve

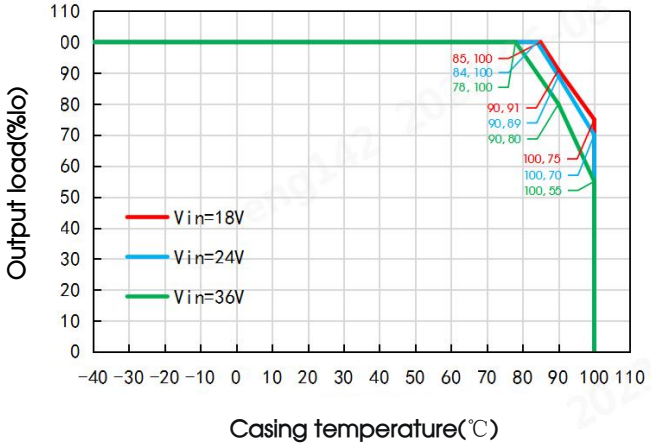


DEHB500-F2424N

Temperature Derating Curve

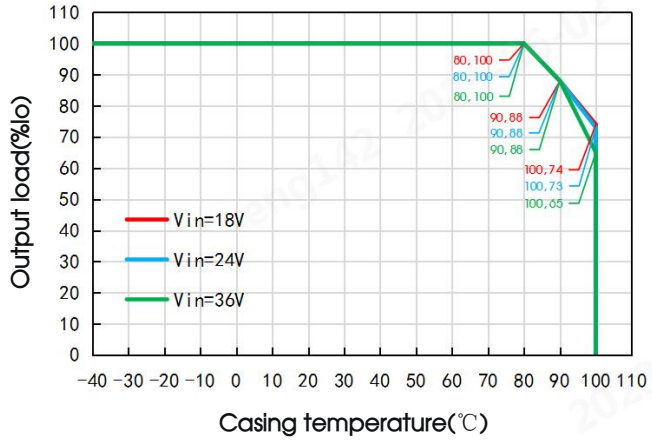

DEHB500-F2428N

Temperature Derating Curve

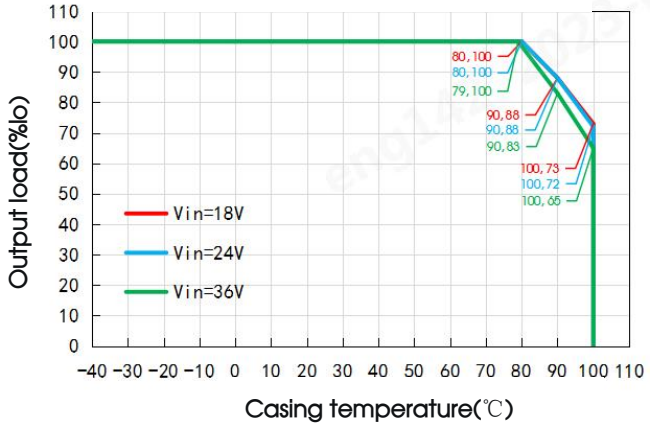

Remote Sense Application

1. Remote Sense Connection if not used

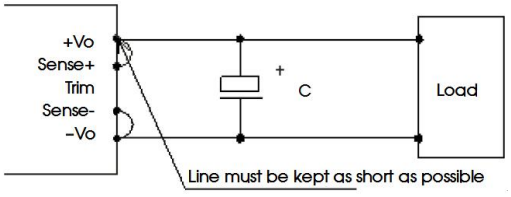


Fig. 1

Note:

①If the sense function is not used for remote regulation the user must connect the +Sense to +Vo and -Sense to -Vo at the DC-DC converter pins and will compensate for voltage drop across pins only.

②The connections between Sense lines and their respective power lines must be kept as short as possible, otherwise they may be picking up noise, interference and/or causing unstable operation of the power module.

2. Remote Sense Connection used for Compensation

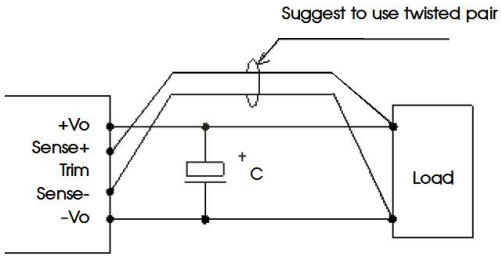


Fig. 2

Note:

①Using remote sense with long wires may cause unstable output, please contact technical support if long wires must be used.

②PCB-tracks or cables/wires for Remote Sense must be kept as short as possible. Twisted pair or shielded wires are suggested for remote compensation and must be kept as short as possible.

③We recommend using adequate cross section for PCB-track layout and/or cables to connect the power supply module to the load in order to keep the voltage drop below 0.3V and to make sure the power supply's output voltage remains within the specified range.

④Note that large wire impedance may cause oscillation of the output voltage and/or increased ripple. Consult technical support or factory for further advice of sense operation.

Design Reference

1. Typical application

①All DC-DC converters of this series are tested before delivery using the recommended circuit shown in Fig. 3.

②Input and/or output ripple can be further reduced by appropriately increasing the input & output capacitor values Cin and Cout and/or by selecting capacitors with a low ESR (equivalent series resistance). Also make sure that the capacitance is not exceeding the specified max. capacitive load value of the product.



Fig. 3

Capacitance value / Output voltage	Cout(min.)	Cin
12V/15V/24V/28V	470μF/35V	220 μF/63V

2. EMC compliance circuit


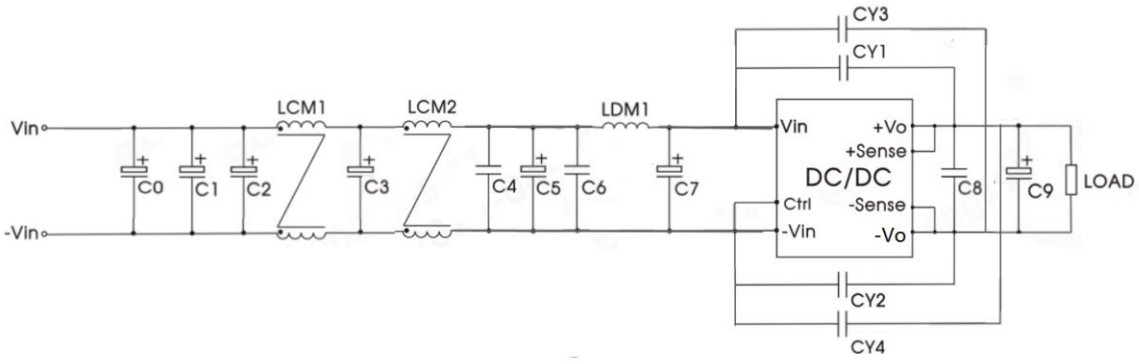


Fig. 4

Device	Parameter description
C0, C1, C2, C3, C5, C7	330μF/63V Electrolytic capacitance
C4, C6, C8	2.2μF/100V Ceramic capacitor
C9	470μF/63V Electrolytic capacitance
LCM1	560uH
LCM2	200uH
LDM1	CPQ2918-100M：10uH
CY1, CY2, CY3, CY4	4.7nF/400VAC Safety Y capacitor

3.Trim Function for Output Voltage Adjustment (open if unused)

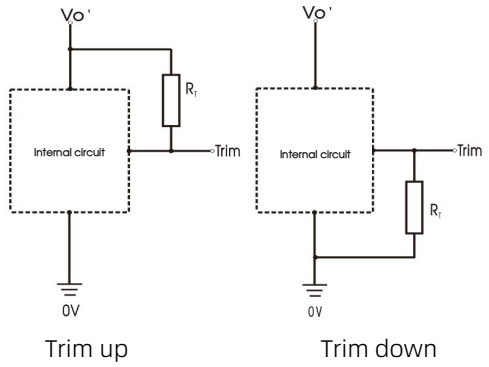

Trim up　　Trim down

Fig. 5

TRIM resistor connection (dashed line shows internal resistor network)

Calculating Trim resistor values:

Trim up

$$R_T = \left(\frac{5.11 V_{nom}(100+\Delta\%)}{1.225\Delta\%} - \frac{511}{\Delta\%} - 10.22 \right)(k\Omega)$$

Trim down

$$R_T = \left(\frac{511}{\Delta\%} \right) - 10.22(k\Omega)$$

Notes:

R_T is Trim resistance

$$\Delta\% = \left| \frac{V_{nom} - V_{out}}{V_{nom}} \right| \times 100$$

V_{nom} is the typical output voltage

V_{out} to set the output voltage

4. Reflected ripple current test circuit

All DC-DC converters of this series are tested using the recommended circuit shown in Fig. 6.

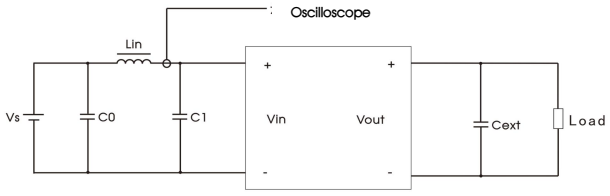


Fig. 6

Components	Recommended Component Value
C0	220μF/63V
Lin	10uH/40A
C1	470μF/63V
Cext	470μF/35V

5. The products do support parallel connection of their output

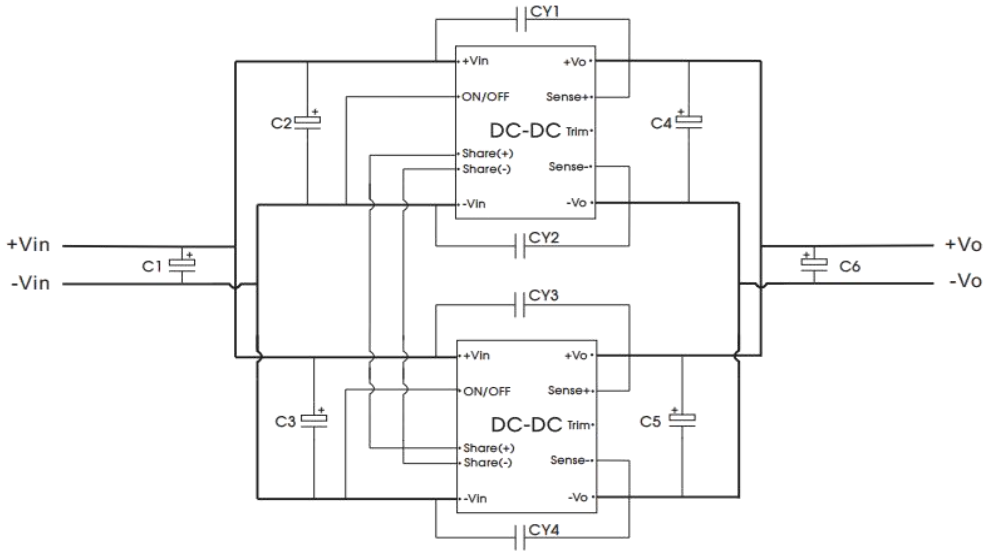


Fig. 7

Parallel current sharing wiring diagram

When the parallel current balancing function is used, ensure that the cable lengths of power modules are equal, the maximum number of parallel connections is 4 .

Vin (VDC)	Vout (VDC)	C1/C2/C3	C4/C5/C6	CY1/CY2/CY3/CY4
24	12/15/24/28	220uF/63V	470uF/35V	222M/Y2

6. Recommended solution for thermal testing

In the process of application, the thermal design of the product can be evaluated in combination with the product temperature derating curve, or the stable working interval of the product can be determined by the temperature of the thermal test point in Figure 8. When the temperature at point A is lower than 100℃, it is the stable working range of the product.


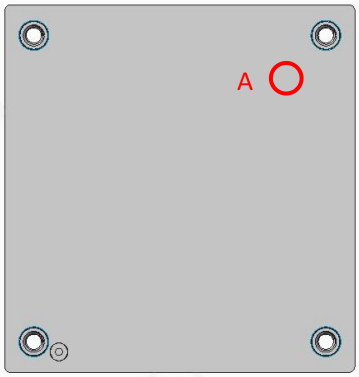


Fig. 8

Top view of the product

DEHB500-F24xxN Dimensions and Recommended Layout

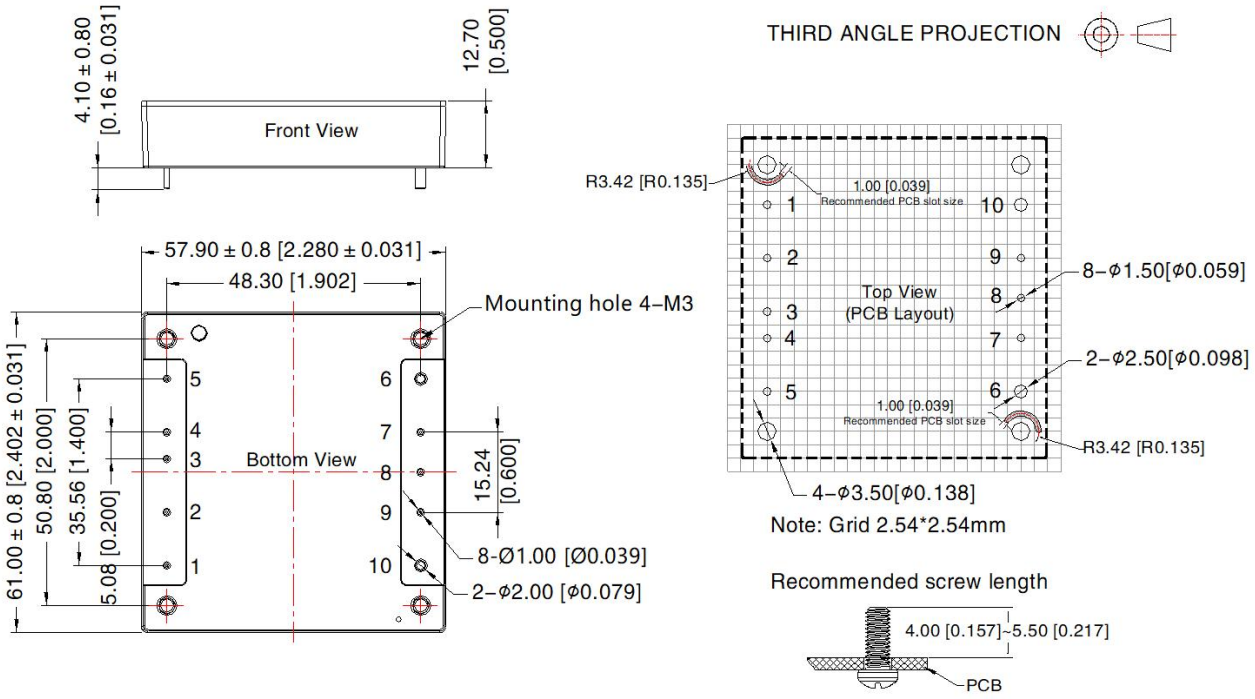

Note:
Unit: mm[inch]
Pin1, 2, 3, 4, 5, 7, 8, 9diameter: 1.00[0.039]
Pin6, 10diameter: 2.00[0.079]
Pin diameter tolerances: ± 0.10[± 0.004]
General tolerances: ± 0.50[± 0.020]
Mounting hole screwing torque: Max 0.4 N · m

Pin–Out			
Pin	Mark	Pin	Mark
1	+Vin	6	–Vo
2	ON/OFF	7	Sense–
3	Share(+)	8	Trim
4	Share(–)	9	Sense+
5	–Vin	10	+Vo

Note:

1. The maximum capacitive load offered were tested at input voltage range and full load;
2. Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25℃, humidity<75%RH with nominal input voltage and rated output load;
3. All index testing methods in this datasheet are based on company corporate standards;
4. We can provide product customization service, please contact our technicians directly for specific information;
5. Products are related to laws and regulations: see "Features" and "EMC";
6. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units;
7. The image certification marks are for reference only; please refer to the selection table for actual specifications. Certification is based on the physical mark or packaging label.