Descriptions

100W isolated，DC/DC Converter



RoHS

CE Report EN 62368-1

UKCA Report BS EN 62368-1

Features

- Ultra-wide input voltage range: 43 -160VDC
- High efficiency up to 90%
- Low no-load power consumption
- Reinforced insulation, input - output isolation test voltage: 3K VAC, input - case isolation test voltage: 2.1K VAC
- Operating ambient temperature range: -40℃ to +105℃
- Input under-voltage protection, output short-circuit, over-current, over-voltage, over-temperature protection
- Industry standard 1/4 brick

Applications

- Railway systems and associated equipment.

Selection Guide

Certification	Part No.①	Input Voltage (VDC)		Output		Full Load Efficiency (%) ⑤ Min./Typ.	Max. Capacitive Load (μF)
		Nominal② (Range)	Max.③	Voltage (VDC)	Current (mA) Max./Min.		
EN/BS EN	DRWQB100-F1D03	110 (43 -160)	170	3.3	22727/0	84/86	40000
	DRWQB100-F1D05			5	20000/0	86/88	20000
	DRWQB100-F1D12			12	8333/0	87/89	6000
	DRWQB100-F1D15			15	6667/0	87/89	4700
	DRWQB100-F1D24			24	4167/0	88/90	3000
	DRWQB100-F1D48			48	2083/0	86/88	480
--	DRWQB100-F1D03H④	110 (43 -160)	170	3.3	22727/0	84/86	40000
	DRWQB100-F1D05H			5	20000/0	86/88	20000
EN/BS EN	DRWQB100-F1D12H			12	8333/0	87/89	6000
	DRWQB100-F1D15H			15	6667/0	87/89	4700
	DRWQB100-F1D24H			24	4167/0	88/90	3000
--	DRWQB100-F1D48H			48	2083/0	86/88	480
--	DRWQB100-F1D03HE5(D6)④	110 (44 -160)	170	3.3	22727/0	82/84	40000
	DRWQB100-F1D05HE5(D6)			5	20000/0	84/86	20000

	DRWQB100-F1D12HE5(D6)			12	8333/0	85/87	6000
	DRWQB100-F1D15HE5(D6)			15	6667/0	85/87	4700
	DRWQB100-F1D24HE5(D6)			24	4167/0	86/88	3000
EN/BS EN	DRWQB100-F1D24HD6						
--	DRWQB100-F1D48HE5(D6)			48	2083/0	84/86	480

Note:
①Use "H" suffix for heat sink mounting. We recommend to choose modules with a heat sink for enhanced heat dissipation and applications with extreme temperature requirements;
②When input voltage at 43-66VDC, the output power and max. capacitive load need to be derated to 80%;
③Exceeding the maximum input voltage may cause permanent damage;
④Use " E5" suffix for chassis mounting and "D6" suffix for DIN-Rail mounting. The minimum input voltage range and the start-up voltage of the E5/D6 product model are 1VDC higher than the horizontal package;
⑤Efficiencies for E5 /D6 Model's is decreased by 2% due to the input reverse polarity protection function;
⑥Product images are for reference only; the actual product shall prevail.

Specifications

Product Specifications	Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Specifications	Input Current (full load / no-load)	Nominal input voltage	3.3VDC output	--	793/10	812/20	mA
			24VDC output	--	1011/10	1034/20	
			12VDC, 15VDC output	--	1022/10	1045/20	
			5VDC, 48VDC output	--	1034/10	1058/20	
	Reflected Ripple Current	Nominal input voltage		--	100	--	
	Surge Voltage (1sec. max.)			-0.7	--	180	VDC
	Start-up Voltage			--	--	43	
	Under-voltage Protection			--	40	--	
	Input Filter			Pi filter			
	Hot Plug			Unavailable			
	Ctrl①	Module on		Ctrl pin open or pulled high (3.5 -12VDC)			
		Module off		Ctrl pin -Vin or pulled low (0 -1.2VDC)			
		Input current when off		--	2	10	mA
Output Specifications	Voltage Accuracy	Nominal input voltage, 0%-100% load		--	±1	±3	%
	Linear Regulation	Input voltage variation from low to high at full load	3.3VDC, 5VDC output	--	--	±0.5	
			Others	--	±0.1	±0.3	
	Load Regulation	Nominal input voltage, 10%-100% load	3.3VDC, 5VDC output	--	±0.5	±1.0	
			Others	--	±0.3	±0.5	
	Transient Recovery Time	25% load step change		--	200	500	μs
	Transient Response Deviation		3.3VDC, 5VDC output	--	±6	±9	%
			Others	--	±3	±5	
	Temperature Coefficient	Full load		--	--	±0.03	%/℃
	Ripple & Noise②	20MHz bandwidth, 10%Io-100%Io load	48VDC output	--	200	300	mVp-p
			Others	--	100	200	
	Trim			90	--	110	%
	Output Voltage Remote Compensation(sense)			--	--	105	

	Over-temperature Protection	SDRWQB100-Face max. temperature		--	105	115	℃
	Over-voltage Protection	Input voltage range	3.3VDC, 5VDC output	110	--	160	%Vo
			Others	110	--	140	
	Over-current Protection	Input voltage range		110	140	190	%Io
	Short-circuit Protection			Hiccup, continuous, self-recovery			
General Specifications	Isolation	Input-output	Electric Strength test for 1 minute with a leakage current of 5mA max.	3000	--	--	VAC
		Input-case		2100	--	--	
		Output-case	Electric Strength test for 1 minute with a leakage current of 1mA max.	1500	--	--	VDC
	Insulation Resistance	Input-output resistance at 500VDC		1000	--	--	MΩ
	Isolation Capacitance	Input-output capacitance at 100KHz/0.1V		--	2200	--	pF
	Switching Frequency	PFM mode		--	170	--	kHz
	MTBF	MIL-HDBK-217F@25℃		500	--	--	khours
	Operating Temperature Range	See temperature derating curves		-40	--	+105	℃
	Storage Humidity	Non-condensing		5	--	95	%RH
	Storage Temperature			-55	--	+125	℃
	Pin Soldering Resistance Temperature③	Soldering spot is 1.5mm away from the case, 10 seconds max.		--	--	+300	
		Wave soldering, maximum 10 seconds		255	260	265	
	Cooling Test			EN60068-2-1			
	Dry Heat			EN60068-2-2			
	Damp Heat			EN60068-2-30			
	Shock and Vibration Test			IEC/EN61373 - Category 1, Grade B			
Mechanical Specifications	Case Material	Aluminum alloy case; Black plastic bottom,flame-retardant and heat-resistant (UL94 V-0)					
	Dimensions	DRWQB100-F1Dxx		60.80 × 39.20 × 12.70 mm			
		DRWQB100-F1DxxH		61.50 × 39.20 × 27.70 mm			
		DRWQB100-F1D03/05E5		135.00 x 70.00 x 20.45 mm			
		DRWQB100-F1D03/05D6		137.00 x 70.00 x 21.45 mm			
		DRWQB100-F1D12/15/24/48E5		135.00 x 70.00 x 22.60 mm			
		DRWQB100-F1D12/15/24/48D6		137.00 x 70.00 x 23.60 mm			
		DRWQB100-F1DxxHE5		135.00 x 70.00 x 36.20 mm			
		DRWQB100-F1DxxHD6		137.00 x 70.00 x 37.20 mm			
	Weight	DRWQB100-F1Dxx		88.0g (Typ.)			
		DRWQB100-F1DxxH		119.0g (Typ.)			
		DRWQB100-F1D03/05E5		186.0g (Typ.)			
		DRWQB100-F1D03/05D6		256.0g (Typ.)			
		DRWQB100-F1D03/05HE5		217.0g (Typ.)			
		DRWQB100-F1D03/05HD6		287.0g (Typ.)			
		DRWQB100-F1D12/15/24/48E5		164.0g (Typ.)			
		DRWQB100-F1D12/15/24/48D6		237.0g (Typ.)			
		DRWQB100-F1D12/15/24/48HE5		200.0g (Typ.)			
		DRWQB100-F1D12/15/24/48HD6		268.0g (Typ.)			

	Cooling Method	Free air convection or forced convection

Note:
①The Ctrl pin voltage is referenced to input -Vin;
②Ripple & Noise for 48VDC output at 0%Io-100%Io load ≤ 400mV, others outputs at 0%Io -100%Io load ≤ 300mV, the measuring method of ripple and noise, please refer to Fig. 1;
③The pin soldering temperature tolerance is not the actual temperature set by the soldering iron but the temperature required for proper solder joints. The actual temperature set by the customer should be determined comprehensively based on factors such as PCB thickness, copper coverage, soldering iron power, and soldering iron tip selection.

Electromagnetic Compatibility (EMC)


Emissions	CE	CISPR32/EN55032 150KHz-30MHz Class B (see Fig. 3 for recommended circuit)	
	RE*	CISPR32/EN55032 30MHz-1GHz Class B (see Fig. 3 for recommended circuit)	
Immunity	ESD	IEC/EN61000-4-2 GB/T17626.2 Contact ±6KV, Air ±8KV	perf.Criteria A
	RS	IEC/EN61000-4-3 GB/T17626.3 20V/m	perf.Criteria A
	CS	IEC/EN61000-4-6 GB/T17626.6 10Vr.m.s	perf.Criteria A
	EFT	IEC/EN61000-4-4 GB/T17626.4 ±2KV (5KHz, 100KHz) (see Fig. 3 for recommended circuit)	perf.Criteria A
	Surge	IEC/EN61000-4-5 GB/T17626.5 line to line ±2KV (1.2μs/50μs 2Ω) (see Fig. 3 for recommended circuit)	perf.Criteria A

Note: *The standard only suit for DRWQB100-F1Dxx series (without heatsink).


Electromagnetic Compatibility (EMC) (EN50155)

Emissions	CE	EN50121-3-2 150kHz-500kHz 99dBuV (see Fig. 2 for recommended circuit) EN55016-2-1 500kHz-30MHz 93dBuV (see Fig. 2 for recommended circuit)	
	RE	EN50121-3-2 30MHz-230MHz 40dBuV/m at 10m (see Fig. 2 for recommended circuit) EN55016-2-1 230MHz-1GHz 47dBuV/m at 10m (see Fig. 2 for recommended circuit)	
Immunity	ESD	EN50121-3-2 Contact ±6KV/Air ±8KV	perf. Criteria A
	RS	EN50121-3-2 20V/m	perf. Criteria A
	EFT	EN50121-3-2 ±2kV 5/50ns 5kHz (see Fig. 2 for recommended circuit)	perf. Criteria A
	Surge	EN50121-3-2 line to line ±1KV (42Ω, 0.5μF) (see Fig. 2 for recommended circuit)	perf. Criteria A
	CS	EN50121-3-2 0.15MHz-80MHz 10V r.m.s	perf. Criteria A


Characteristic Curve

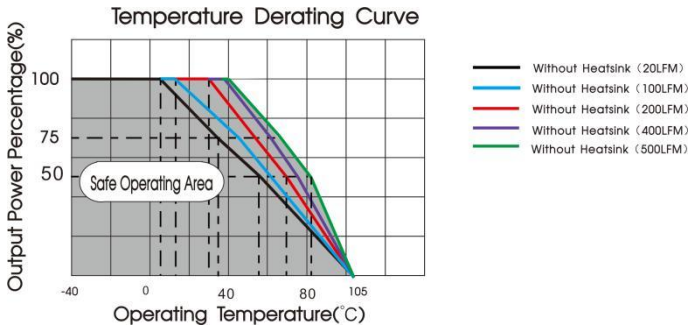


DRWQB100-F1D05 temperature derating curve（Vin=110V）

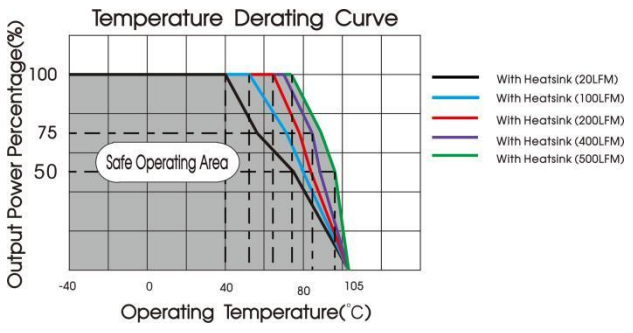

DRWQB100-F1D05H temperature derating curve（Vin=110V）

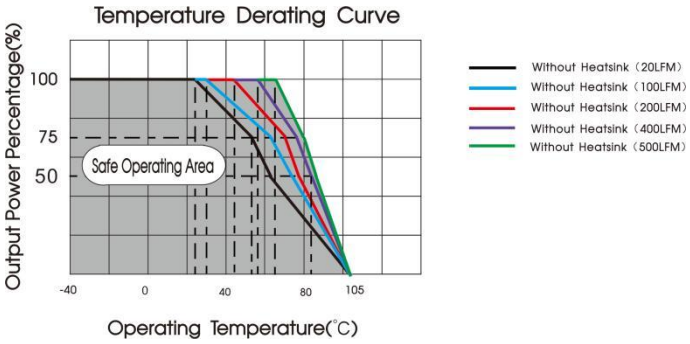


DRWQB100-F1D12 temperature derating curve（Vin=110V）

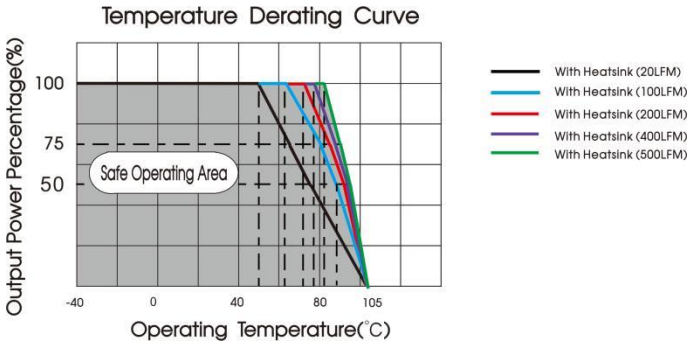


DRWQB100-F1D12H temperature derating curve（Vin=110V）


Note:
1: Temperature derating curves and efficiency curves are typical test values.
2: The temperature derating curve is tested according to our laboratory test conditions. If the actual environmental conditions used by customers are inconsistent, it is necessary to ensure that the temperature of the aluminum case of the product does not exceed 100℃, and it can be used within any rated load range.

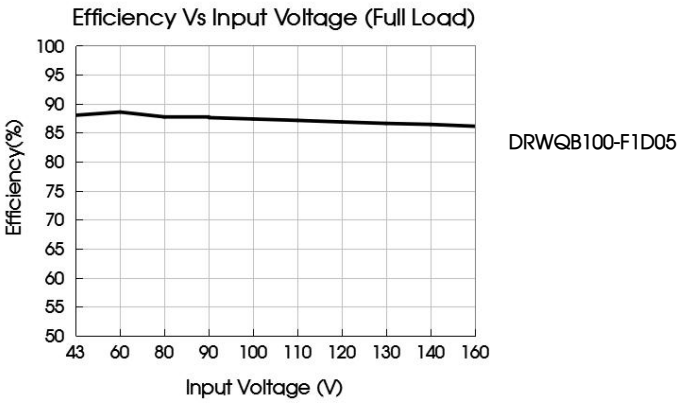


DRWQB100-F1D05

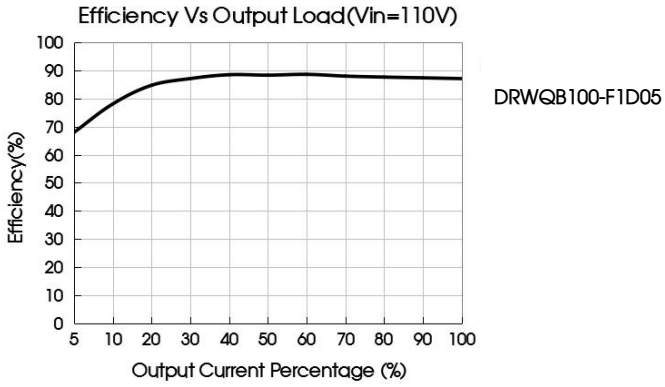

DRWQB100-F1D05

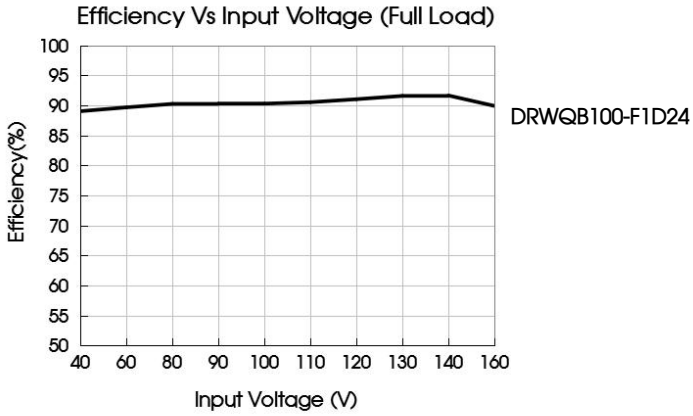


DRWQB100-F1D24

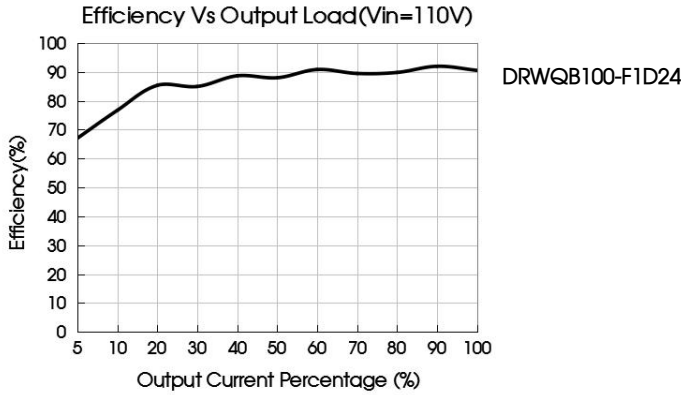

DRWQB100-F1D24

Remote Sense Application


1. Remote Sense Connection if not used

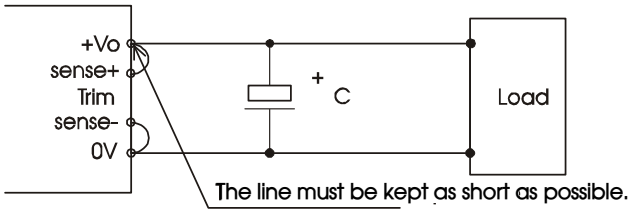

Note:

1. If the sense function is not used for remote regulation the user must connect the +Sense to + Vo and -Sense to 0V at the DC-DC converter pins and will compensate for voltage drop across pins only.
2. The connections between Sense lines and their respective power lines must be kept as short as possible, otherwise they may be picking up noise, interference and/or causing unstable operation of the power module.

2. Remote Sense Connection used for Compensation

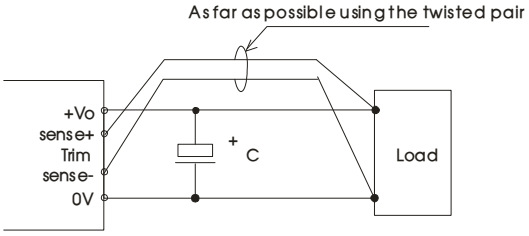

Note:

1. Using remote sense with long wires may cause unstable output, please contact technical support if long wires must be used.
2. PCB-tracks or cables/wires for Remote Sense must be kept as short as possible. Twisted pair or shielded wairs are suggested for remote compensation and must be kept as short as possible.
3. We recommend using adequate cross section for PCB-track layout and/or cables to connect the power supply module to the load in order to keep the voltage drop below 0.3V and to make sure the power supply's output voltage remains within the specified range.
3. Note that large wire impedance may cause oscillation of the output voltage and/or increased ripple. Consult technical support or factory for further advice of sense operation.

Design Reference

1. Ripple & Noise

All the DC-DC converters of this series are tested before delivery using the recommended circuit shown in Fig. 1.

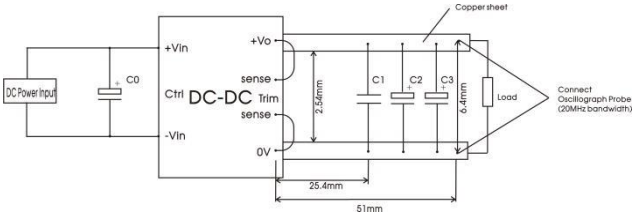


Fig.1

Capacitors value / Output voltage	C0(μF)	C1(μF)	C2(μF)	C3(μF)
3.3VDC	100	1	10	1000
5VDC				680
12VDC				220
15VDC				
24VDC				
48VDC				

2. Typical application

①We recommended using ATAZ's EMC circuit, otherwise please ensure that at least a 100μF electrolytic capacitors is connected at the input in order to ensure adequate voltage surge suppression and protection.

②Input and/or output ripple can be further reduced by appropriately increasing the input & output capacitor values Cin and Cout and/or by selecting capacitors with a low ESR (equivalent series resistance). Also make sure that the capacitance is not exceeding the specified max. capacitive load value of the product.



Capacitors value / Output voltage	Cout(μF)	Cin(μF)
3.3VDC	1000	100
5VDC	680	
12VDC	220	
15VDC		
24VDC		
48VDC		

3. EMC compliance recommended circuit

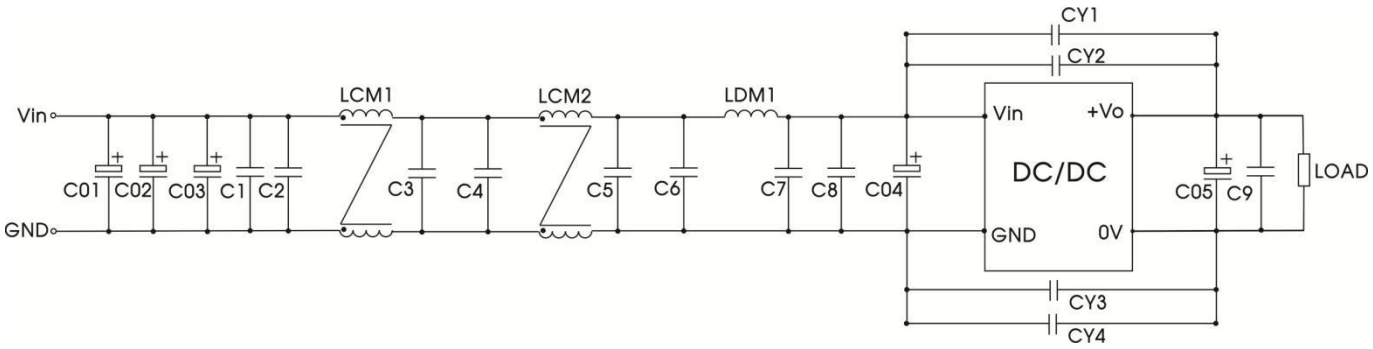


Fig.2

C01, C02, C03, C04	220uF/200V (electrolytic capacitor)
C05	220uF/63V (electrolytic capacitor)
LDM1	1.5uH (Shielded inductor)
C1, C2, C3, C4, C5, C6, C7, C8, C9	2.2uF/250V
CY1, CY2, CY3, CY4	2200 pF /400VAC (Y safety capacitor)
LCM1	4.7mH
LCM2	1mH


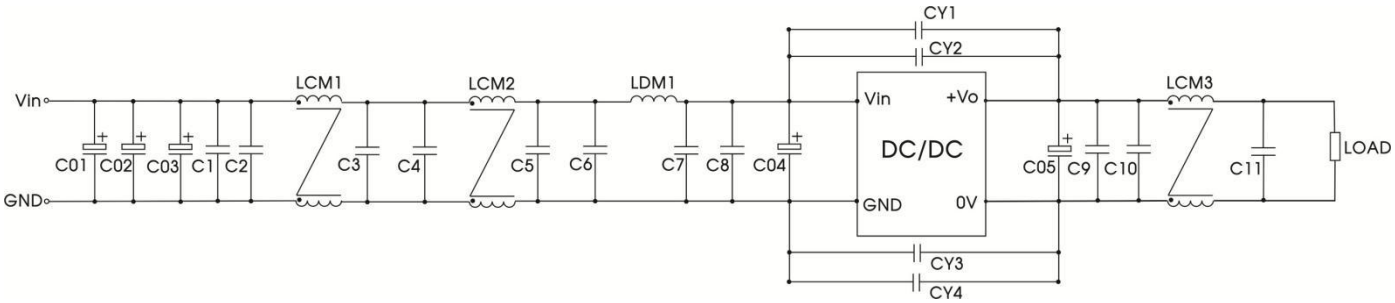


Fig.3

C01, C02, C03, C04	220uF/200V (electrolytic capacitor)
C05	220uF/63V (electrolytic capacitor)
LDM1	1.5uH (Shielded inductor)
C1, C2, C3, C4, C5, C6, C7, C8, C9, C10, C11	2.2uF/250V
CY1, CY2, CY3, CY4	2200 pF /400VAC (Y safety capacitor)
LCM1	4.7mH
LCM2	1mH
LCM3	4.7mH
	1mH
	36μH

4. Trim Function for Output Voltage Adjustment (open if unused)

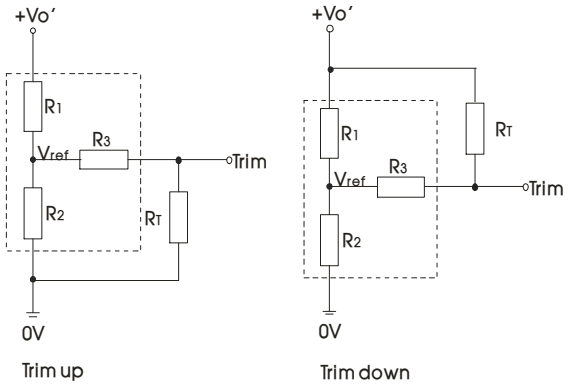

TRIM resistor connection (dashed line shows internal resistor network)

Trim resistor calculation:

$$\text{up: } R_T = \frac{aR_2}{R_2-a} - R_3 \qquad a = \frac{Vref}{Vo'-Vref} \cdot R_1$$

$$\text{down: } R_T = \frac{aR_1}{R_1-a} - R_3 \qquad a = \frac{Vo'-Vref}{Vref} \cdot R_2$$


table 1

Vo / resistance	3.3(VDC)	5(VDC)	12(VDC)	15(VDC)	24(VDC)	48(VDC)
R1(KΩ)	4.74	8.74	11	14.49	24.87	58.7
R2(KΩ)	2.87	2.87	2.87	2.87	2.87	3.21
R3(KΩ)	9.66	11	11	16	21	11
Vref(V)	1.25	1.25	2.5	2.5	2.5	2.5

Note: For R1, R2, R3 and Vref values refer to table 1. RT = Trim Resistor value; a = self-defined parameter Vo'= desired output voltage

5. The products do not support parallel connection of their output

DRWQB100-F1Dxx Dimensions and Recommended Layout

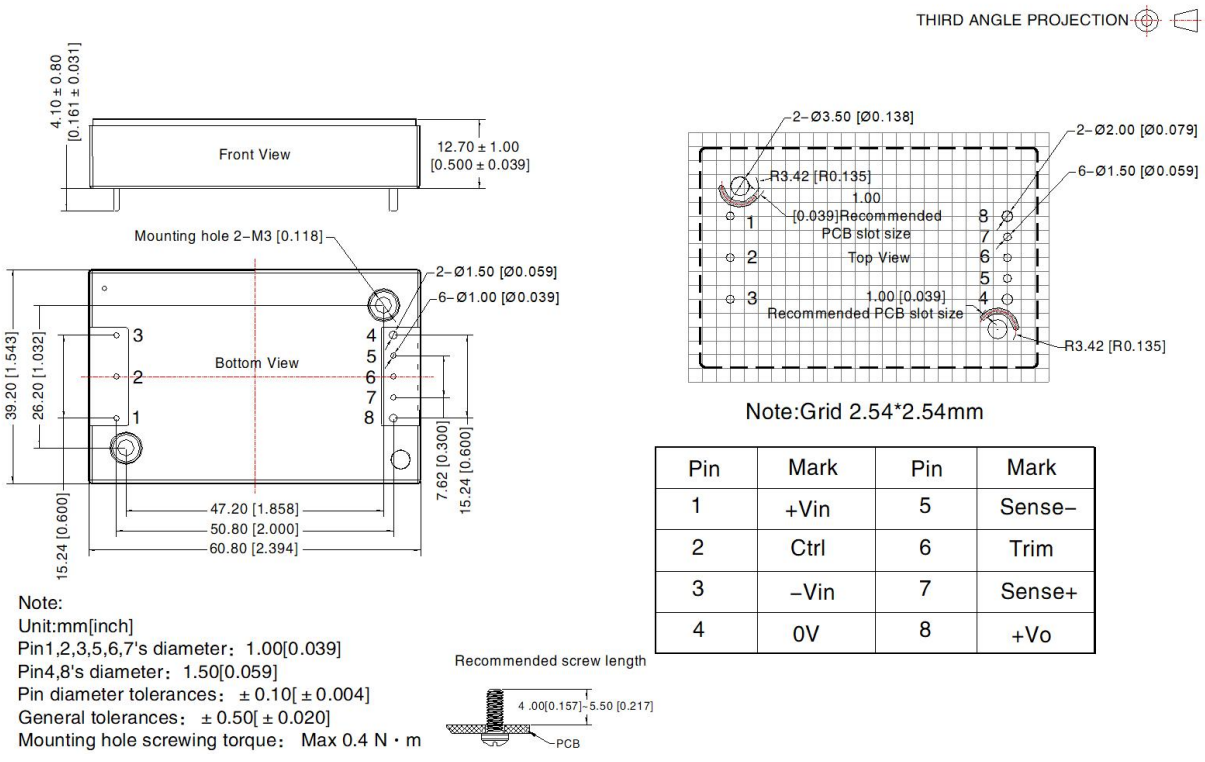


Note:Grid 2.54*2.54mm

Pin	Mark	Pin	Mark
1	+Vin	5	Sense−
2	Ctrl	6	Trim
3	−Vin	7	Sense+
4	0V	8	+Vo

Note:
Unit:mm[inch]
Pin1,2,3,5,6,7's diameter：1.00[0.039]
Pin4,8's diameter：1.50[0.059]
Pin diameter tolerances：±0.10[±0.004]
General tolerances：±0.50[±0.020]
Mounting hole screwing torque： Max 0.4 N・m

DRWQB100-F1DxxH Dimensions and Recommended Layout

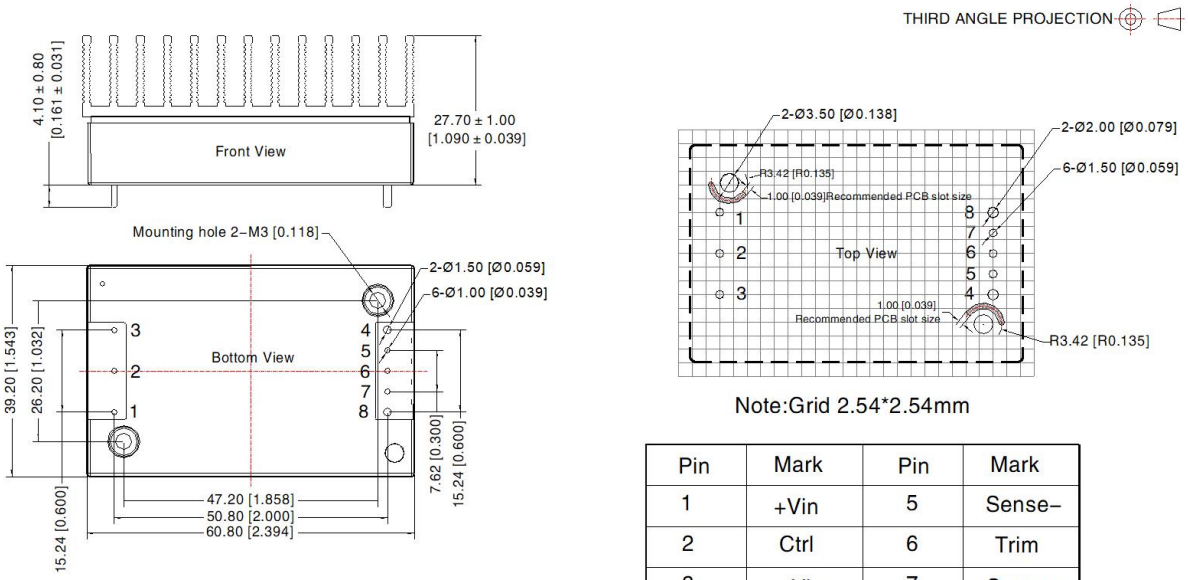


Note:Grid 2.54*2.54mm


Pin	Mark	Pin	Mark
1	+Vin	5	Sense−
2	Ctrl	6	Trim
3	−Vin	7	Sense+
4	0V	8	+Vo

Note:
Unit:mm[inch]
Pin1,2,3,5,6,7's diameter：1.00[0.039]
Pin4,8's diameter：1.50[0.059]
Pin diameter tolerances：±0.10[±0.004]
General tolerances：±0.50[±0.020]
Mounting hole screwing torque： Max 0.4 N・m

Recommended screw length



DRWQB100-F1D03/05E5 Dimensions and Recommended Layout

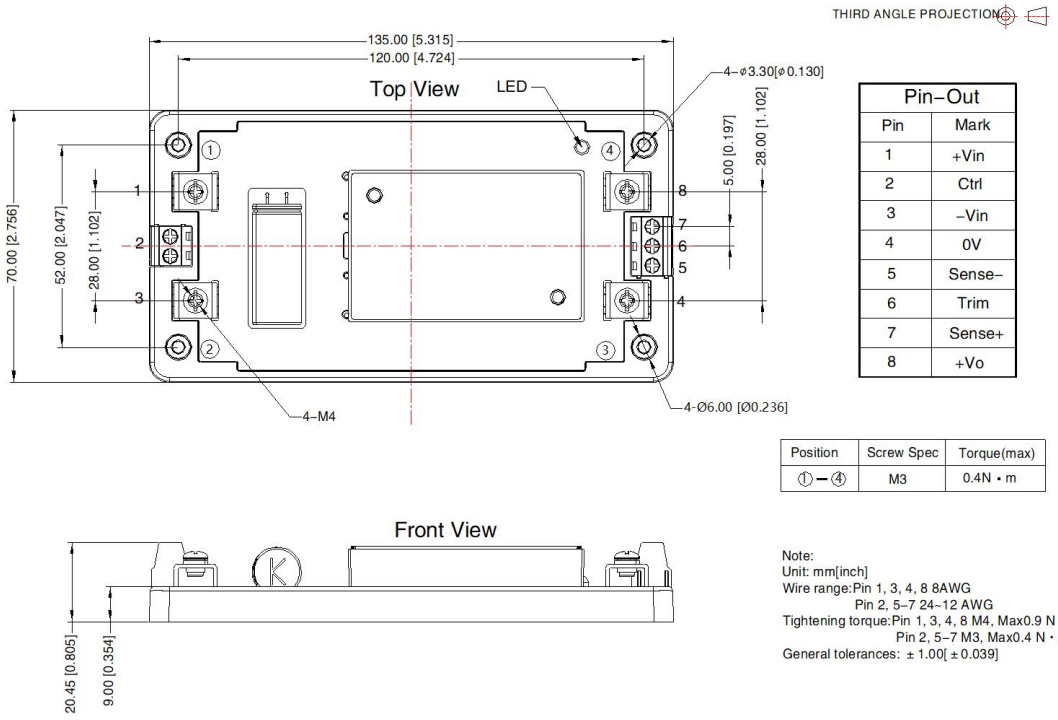


Pin−Out	
Pin	Mark
1	+Vin
2	Ctrl
3	−Vin
4	0V
5	Sense−
6	Trim
7	Sense+
8	+Vo

Position	Screw Spec	Torque(max)
①−④	M3	0.4N・m

Note:
Unit: mm[inch]
Wire range:Pin 1, 3, 4, 8 8AWG
Pin 2, 5−7 24~12 AWG
Tightening torque:Pin 1, 3, 4, 8 M4, Max0.9 N・m
Pin 2, 5−7 M3, Max0.4 N・m
General tolerances: ±1.00[±0.039]


DRWQB100-F1D03/05D6 Dimensions and Recommended Layout

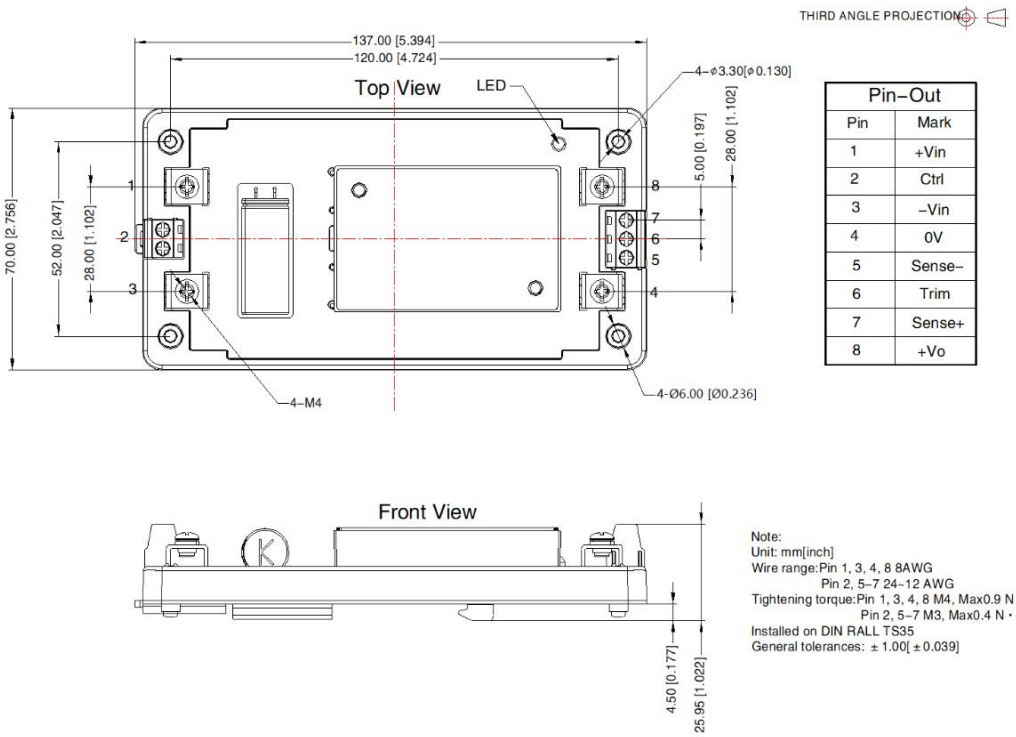

Pin-Out	
Pin	Mark
1	+Vin
2	Ctrl
3	-Vin
4	0V
5	Sense-
6	Trim
7	Sense+
8	+Vo

Note:
Unit: mm[inch]
Wire range:Pin 1, 3, 4, 8 8AWG
Pin 2, 5-7 24~12 AWG
Tightening torque:Pin 1, 3, 4, 8 M4, Max0.9 N・r
Pin 2, 5-7 M3, Max0.4 N・m
Installed on DIN RALL TS35
General tolerances: ± 1.00[± 0.039]

DRWQB100-F1D03/05HE5 Dimensions and Recommended Layout

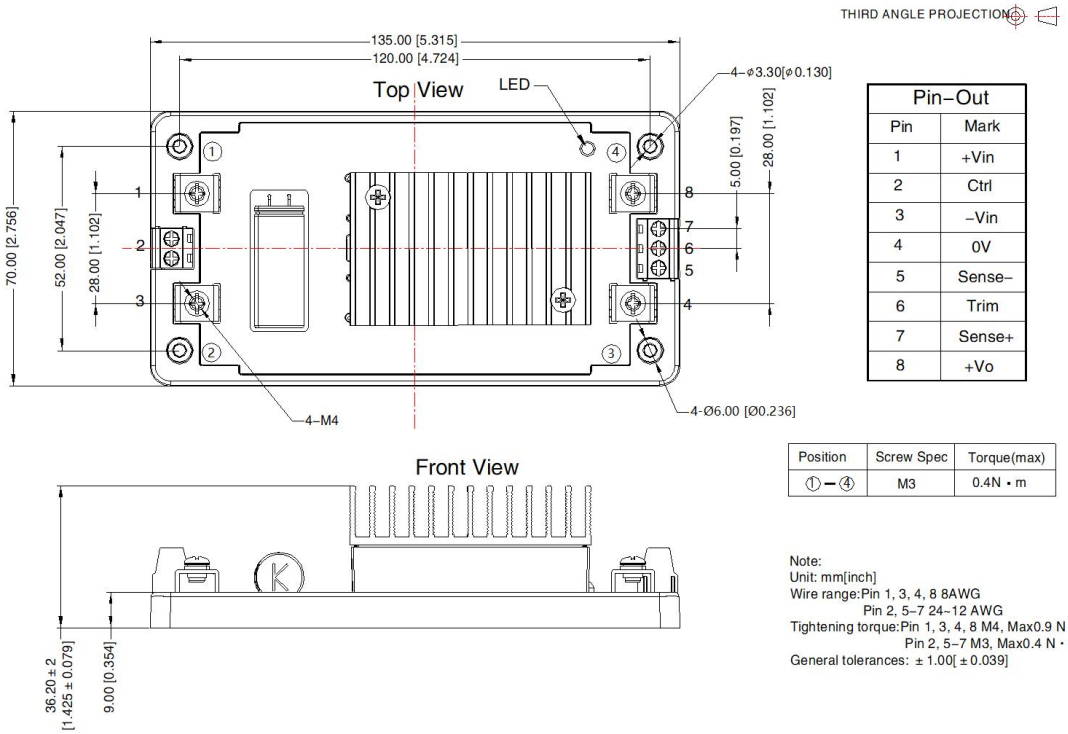


Pin-Out	
Pin	Mark
1	+Vin
2	Ctrl
3	-Vin
4	0V
5	Sense-
6	Trim
7	Sense+
8	+Vo

Position	Screw Spec	Torque(max)
①-④	M3	0.4N・m

Note:
Unit: mm[inch]
Wire range:Pin 1, 3, 4, 8 8AWG
Pin 2, 5-7 24~12 AWG
Tightening torque:Pin 1, 3, 4, 8 M4, Max0.9 N・m
Pin 2, 5-7 M3, Max0.4 N・m
General tolerances: ± 1.00[± 0.039]


DRWQB100-F1D03/05HD6 Dimensions and Recommended Layout

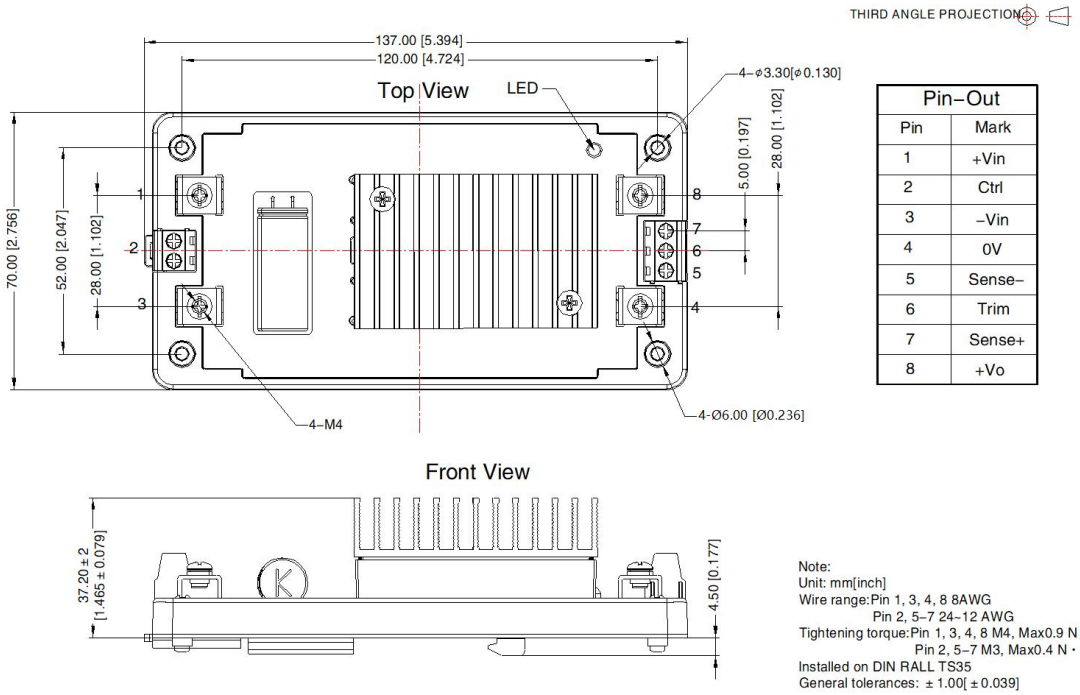

Pin-Out	
Pin	Mark
1	+Vin
2	Ctrl
3	-Vin
4	0V
5	Sense-
6	Trim
7	Sense+
8	+Vo

Note:
Unit: mm[inch]
Wire range: Pin 1, 3, 4, 8 8AWG
Pin 2, 5–7 24~12 AWG
Tightening torque: Pin 1, 3, 4, 8 M4, Max0.9 N・m
Pin 2, 5–7 M3, Max0.4 N・m
Installed on DIN RALL TS35
General tolerances: ± 1.00[± 0.039]


DRWQB100-F1D12/15/24/48E5 Dimensions and Recommended Layout

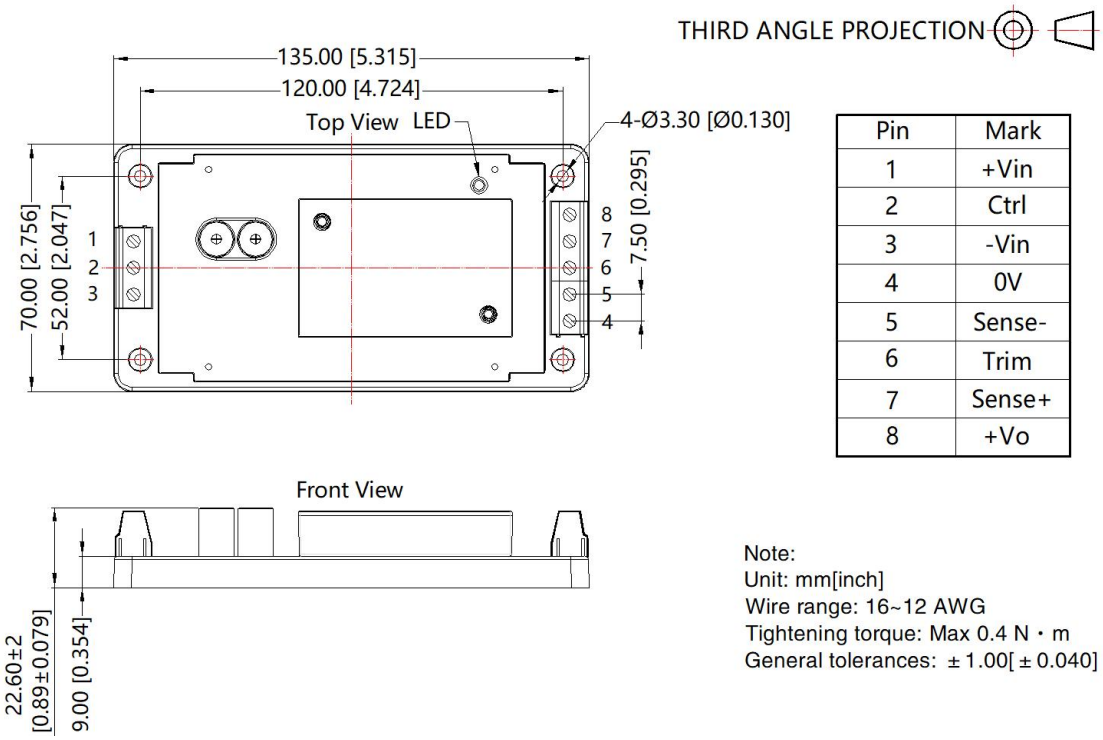

Pin	Mark
1	+Vin
2	Ctrl
3	-Vin
4	0V
5	Sense-
6	Trim
7	Sense+
8	+Vo

Note:
Unit: mm[inch]
Wire range: 16~12 AWG
Tightening torque: Max 0.4 N・m
General tolerances: ± 1.00[± 0.040]


DRWQB100-F1D12/15/24/48D6 Dimensions and Recommended Layout

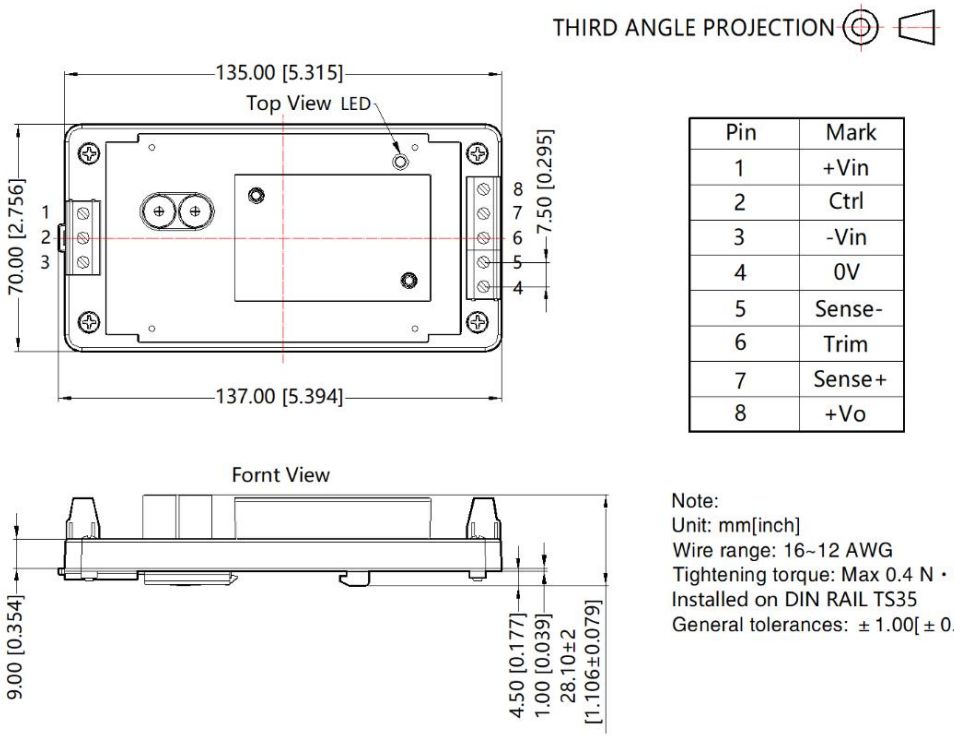

Pin	Mark
1	+Vin
2	Ctrl
3	-Vin
4	0V
5	Sense-
6	Trim
7	Sense+
8	+Vo

Note:
Unit: mm[inch]
Wire range: 16~12 AWG
Tightening torque: Max 0.4 N・m
Installed on DIN RAIL TS35
General tolerances: ± 1.00[± 0.040]


DRWQB100-F1D12/15/24/48HE5 Dimensions and Recommended Layout

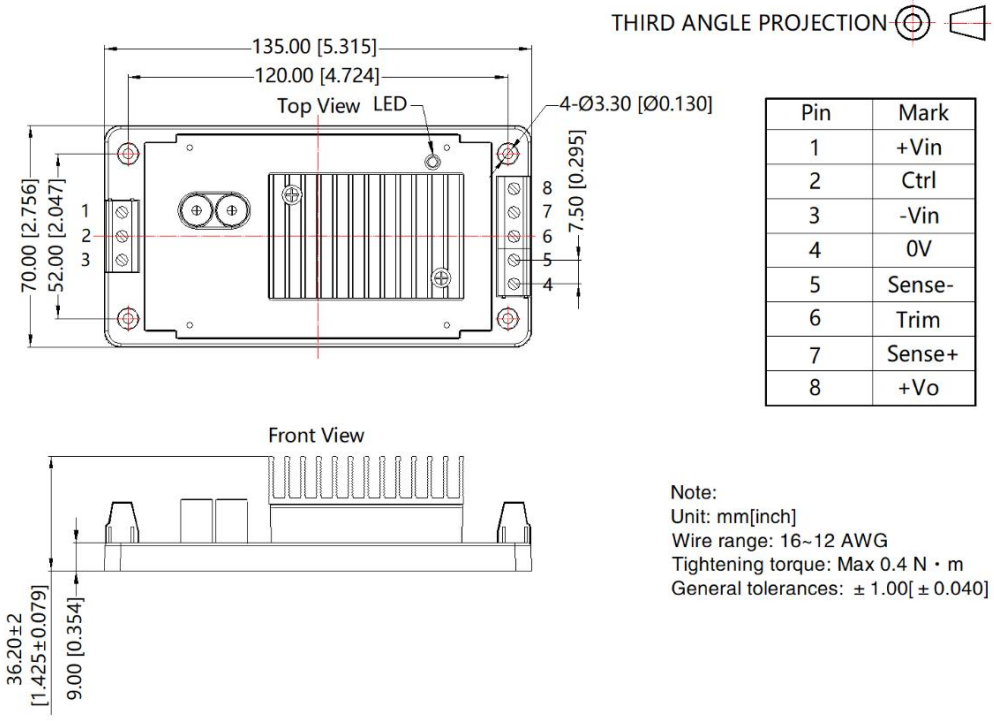

Pin	Mark
1	+Vin
2	Ctrl
3	-Vin
4	0V
5	Sense-
6	Trim
7	Sense+
8	+Vo

Note:
Unit: mm[inch]
Wire range: 16~12 AWG
Tightening torque: Max 0.4 N・m
General tolerances: ± 1.00[± 0.040]

DRWQB100-F1D12/15/24/48HD6 Dimensions and Recommended Layout

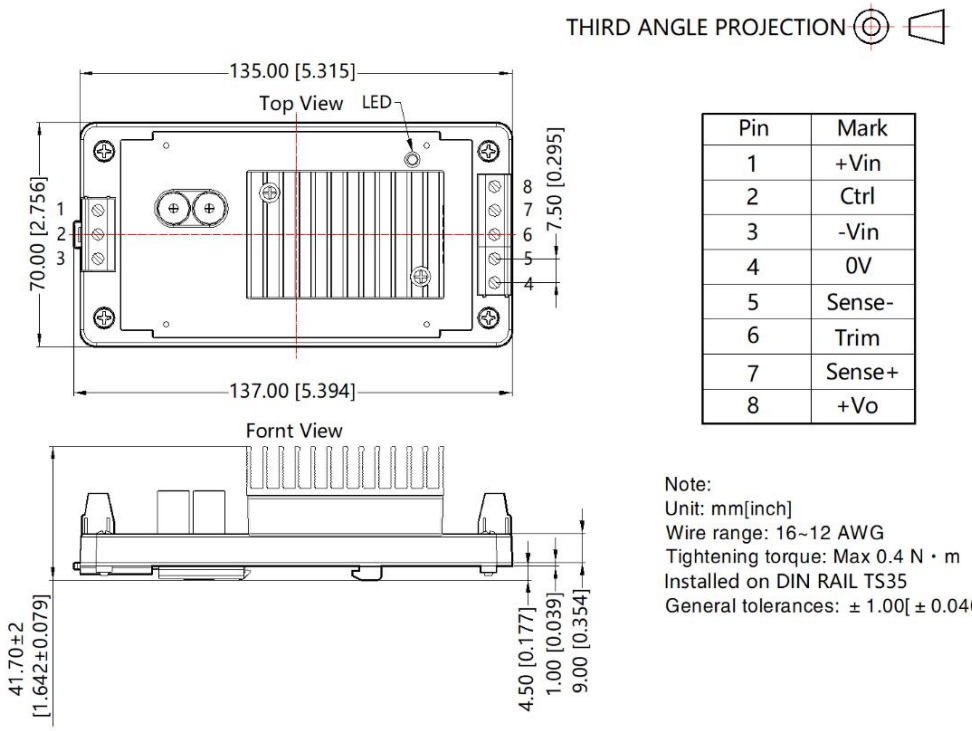

Pin	Mark
1	+Vin
2	Ctrl
3	-Vin
4	0V
5	Sense-
6	Trim
7	Sense+
8	+Vo

Note:
Unit: mm[inch]
Wire range: 16~12 AWG
Tightening torque: Max 0.4 N・m
Installed on DIN RAIL TS35
General tolerances: ± 1.00[± 0.040]

Note:

1. Recommend to use module with more than 5% load, if not, the ripple of the product may exceeds the specification, but does not affect the reliability of the product;
2. The maximum capacitive load offered were tested at input voltage range and full load;
3. It is suggested to take our recommended circuit for EMC testing. If the customer needs to meet the performance of the surge and without taking recommended solution of ours, please make sure the residual voltage of surge less than 180V;
4. It is suggested that customers use enamel film or thermal grease between the heat sink and the module when using the heat sink to ensure good heat dissipation;
5. Unless otherwise specified, data in this datasheet should be tested under the conditions of Ta=25℃, humidity<75%RH with nominal input voltage and rated load;
6. All index testing methods in this datasheet are based on company corporate standards;
7. Products are related to laws and regulations: see "Features" and "EMC";
8. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units;
9. The image certification marks are for reference only; please refer to the selection table for actual specifications. Certification is based on the physical mark or packaging label.