
Descriptions

Duplex High Rate Isolation CAN Transceiver Module



RoHS

3 Years Warranty

CE Report EN62368-1

UKCA Report BS EN62368-1

Features

- Integrated high efficiency isolated DC/DC converter
- Two-port isolation (2.5kVDC) / Channel isolation (1.5kVDC)
- High baud rate up to 1Mbps
- Operating ambient temperature range: -40℃ to +105℃
- Complies with ISO 11898 standard
- An unpowered node does not disturb the bus lines
- The bus supports maximum 110 nodes
- Integrated isolation and ESD bus protection

Applications

- Communication

Selection Guide

Certification	Part No.	Power input (VDC)	Baud rate (bps)	Static Current (mA)	Maximum Operating Current (mA)	Maximum Bus Voltage (VDC)	Number of Nodes
EN/BS EN	TCANH302D	3.3	40k-1M	37	100	±40	110
	TCANH502D	5	40k-1M	42	85	±40	110

Notes:*Product images are for reference only; the actual product shall prevail.

Specifications

Product feature	Item		Symbol	Min.	Typ.	Max.	Unit
Absolute Limits	Input Surge Voltage (1sec.max.)		3.3V series	-0.7	--	5	VDC
			5.0V series	-0.7	--	7	
	Pin Soldering Resistance Temperature*		Soldering spot is 1.5mm away from the case, 10 seconds max.	--	--	+300	℃
			Wave soldering, maximum 10 seconds	255	260	265	
3.3V Series input Specifications	Power Supply Input Voltage		VCC	3.15	3.3	3.45	VDC
	TXD Logic Level	High-level	VIH	0.7VCC	--	3.6	
		Low-level	VIL	0	--	0.8	
	RXD Logic Level	High-level	VOH	VCC-0.4	3.1	--	
		Low-level	VOL	0	0.2	0.4	
	TXD Drive Current		IT	2	--	--	mA
	RXD Output Current		IR	--	--	10	
	Serial Interface		Standard CAN controller interface for +3.3V				
5V Series Input Specifications	Power Supply Input Voltage		VCC	4.75	5	5.25	VDC
	TXD Logic Level	High-level	VIH	0.7VCC	--	5.5	
		Low-level	VIL	0	--	0.8	
	RXD Logic Level	High-level	VOH	VCC-0.4	4.8	--	
		Low-level	VOL	0	0.2	0.4	
	TXD Drive Current		IT	2	--	--	mA
	RXD Output Current		IR	--	--	10	
	Serial Interface		Standard CAN controller interface for +5.0V				
Transmission Specifications	Data Delay	TXD Transmitter Delay	tT	--	55	115	ns
		RXD Receiver Delay	tR	--	65	135	
		Cycle Delay	tPRO(TXD-RXD)	--	120	250	
Output Specifications	Dominant Level (Logic 0)	CANH	V(OD)CANH	2.75	3.5	4.5	VDC
		CANL	V(OD)CANL	0.5	1.5	2.25	
	Recessive Level (Logic 1)	CANH	V(OR)CANH	2	2.5	3	
		CANL	V(OR)CANL	2	2.5	3	
	Differential Level	Dominant Level (Logic 0)	Vdiff(d)	1.5	2	3	
		Recessive Level (Logic 1)	Vdiff(r)	-0.05	0	0.05	
	Bus Pin Maximum Withstand Voltage		VX	-40	--	+40	
	Bus Transient Voltage		Vtrt , Meet ISO7637-3 standard	-150	--	+100	
	Bus Pin Leakage Current		(VCC=0V,VCANFDH/L=5V)	-5	--	5	uA
	Load Resistance Differential		RL	50	60	65	Ω
	Input Impedance Differential		Rdiff	30	--	80	kΩ
	CAN Bus Interface		Meets ISO/DIS 11898 standard Twisted-pair output				

General Specifications	Isolation Test	Electric strength test for 1 min., leakage current <1mA	Input-output: 2.5kVDC
			Output-output: 1.5kVDC
	Insulation Resistance	At 500VDC	1000MΩ
	Operating Temperature	-40℃ to +105℃	
	Transportation and Storage Temperature	-50℃ to +125℃	
	Operating Humidity	Non-condensing	10% - 90%
	Maximum temperature of the product	Ta=25℃, Free air convection	≤65℃
	Safety Class	CLASS III	
	Application Environment	The presence of dust, severe vibration, shock and corrosive gas may cause damage to the product	
Mechanical Specifications	Case Material	Black flame-retardant heat-proof plastic (UL94 V-0)	
	Dimensions	20.0 x 17.0 x 7.0 mm	
	Weight	4.2g(Typ.)	
	Cooling Method	Free air convection	

Note: *The pin soldering temperature tolerance is not the actual temperature set by the soldering iron but the temperature required for proper solder joints. The actual temperature set by the customer should be determined comprehensively based on factors such as PCB thickness, copper coverage, soldering iron power, and soldering iron tip selection.

Electromagnetic Compatibility (EMC)

Immunity	ESD	IEC/EN 61000-4-2	Contact ±2kV/Air ±8kV (without external components, signal port)	Perf. Criteria A
	RS	IEC/EN 61000-4-3	10V/m (without external components)	Perf. Criteria A
	EFT	IEC/EN 61000-4-4	±2kV (without external components, signal port)	Perf. Criteria B
	Surge	IEC/EN 61000-4-5	±2kV (line to ground) (without external components, signal port)	Perf. Criteria A
	CS	IEC/EN 61000-4-6	3Vr.m.s (without external components)	Perf. Criteria A

Application Precautions

1.Carefully read and follow the instructions before use; contact our technical support if you have any question;

2.Do not use the product in hazardous areas;

3.use only DC power supply source for this product. 220V AC power supply is prohibited;

4.It is strictly forbidden to disassemble the product privately in order to avoid product failure or malfunction;

5.Hot-swap is not supported;

6. If the external input of TXD is insufficient, the pull-up resistor should be added according to the situation.

After-sales service

1.Factory inspection and quality control are strictly enforced before shipping any product; please contact your local representative or our technical support if you experience any abnormal operation or possible failure of the module;

2.The products have a 3-year warranty period, from the date of shipment. The product will be repaired or exchanged free of charge within the warranty period for any quality problem that occurs under normal use.

Design Reference

1. Typical application circuit

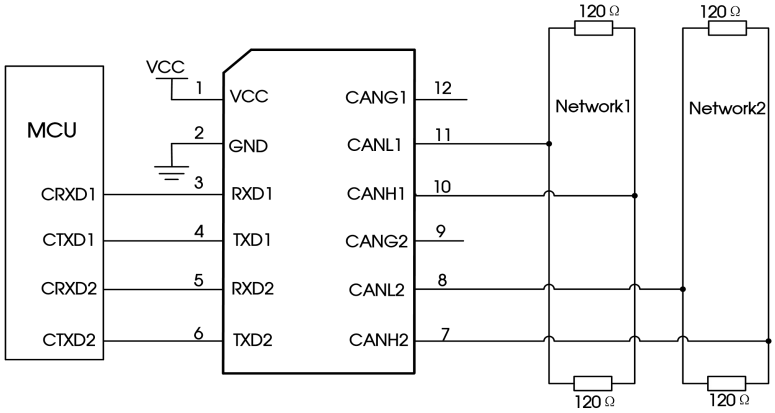


Fig. 1

Figure 1 shows a typical application circuit for connecting a module. The module with its integrated power supply, CAN controller and CAN bus network interface can generally be used by customers as is, without the need of adding peripheral circuits.

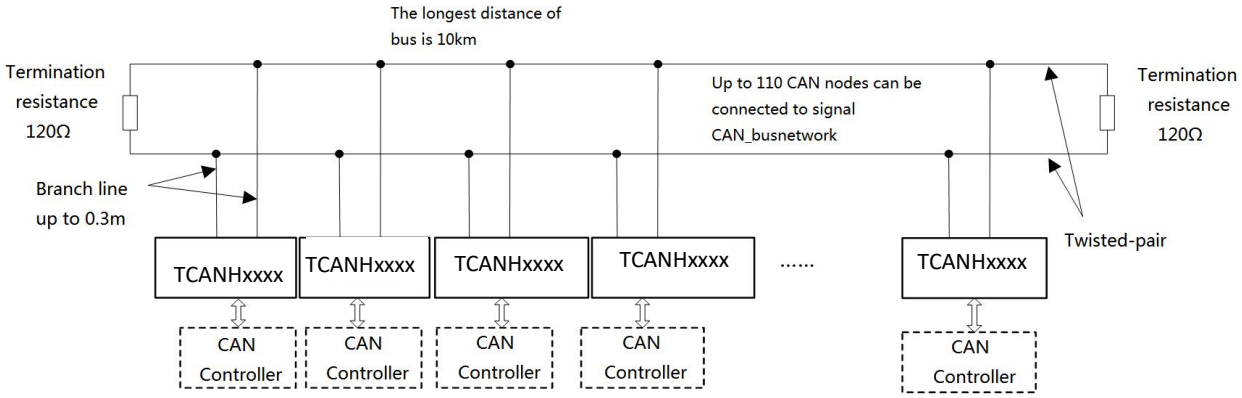


Fig.2

As shown in Figure 2, a single CAN-bus network allows connecting as many as 110 isolated single-channel TCANH transceiver modules. This universal type module supports a maximum communication distance of 10km while the high-speed type module can support a maximum communication distance of 1km with a baud rate beyond 40kbps. For accessing more nodes or achieving longer communication distances, CAN repeaters or other expansion equipment can easily be used.

Note: The communication distance of the bus is related to the communication speed and its field application. It can be designed according to the actual application and reference standard. We recommended the use of a twisted pair or shielded twisted pair as the communication cable and it should be kept away from any sources of interference. For long-distance communication, the terminal resistance value needs to be selected in accordance with the communication distance, the cable impedance and the number of nodes,CAN-bus typical network can refer to Figure 2.

2. Recommended port protection circuit

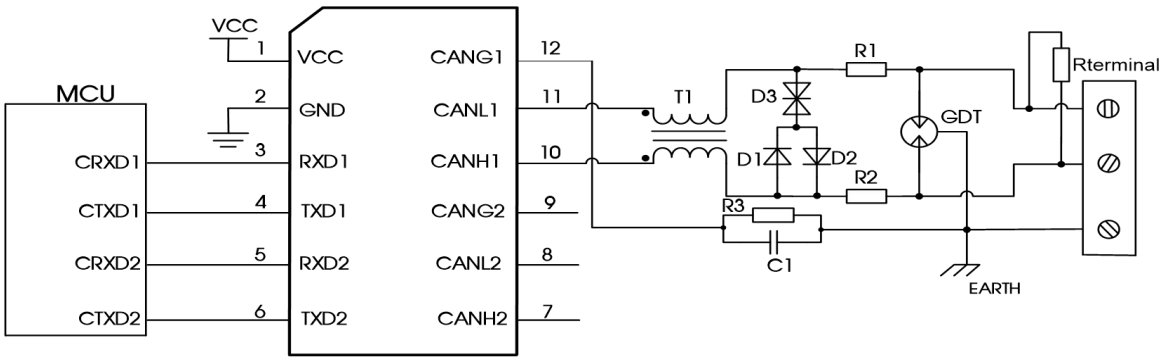


Fig.3

Note: Ground shield of twisted wire pair reliably.


Recommended components and values:

Component	Recommended part, value	Component	Recommended part, value
R3	1MΩ	R1, R2	2.7Ω/2W
C1	1nF, 2kV	D1, D2	1N4007
T1	ACM2520-301-2P	D3	SMBJ30CA
GDT	B3D090L	Rterminal	120Ω


When the module is used in applications with harsh environment, it can be susceptible to large energy like lightning strike, etc. in which case, it is essential to add an adequate protection circuit to the CAN signal ports to protect the system from failure and maintain a reliable bus communication. Figure 4 provides a recommended protection circuit design for high-energy lightning surges, with a degree of protection related to the selected protection device. Parameter description lists a set of recommended circuit parameters, which can be adjusted according to the actual application situation. Also, when using the shielded cable, the reliable single-point grounding of the shield must be achieved.

Note: The recommended components that will change the Specifications of Bus Pin Maximum Withstand Voltage by D3 and its values is a general guideline only. It must be verified for the actual user's application. We recommended using PTC's for R1 and R2 and to use fast recovery diodes for D1 and D2.

Dimensions and Recommended Layout

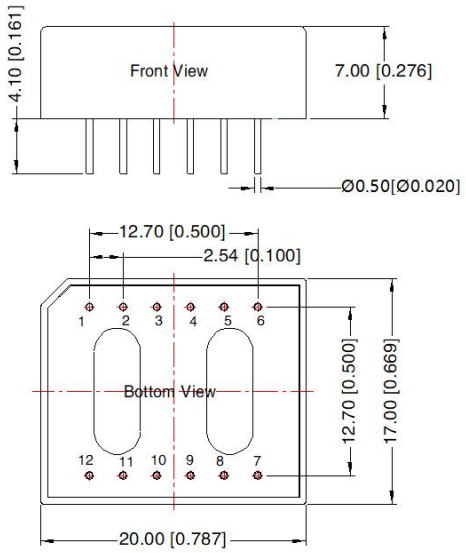

Note:
Unit: mm[inch]
Pin diameter tolerances: ±0.10[±0.004]
General tolerances: ±0.50[±0.020]

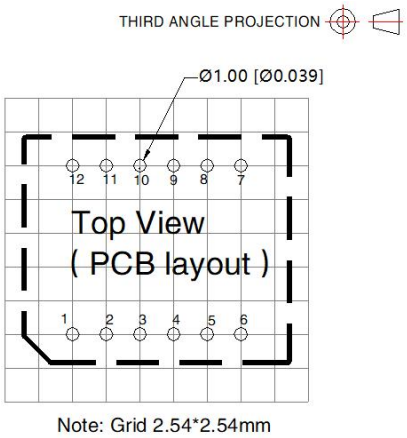

Note: Grid 2.54*2.54mm

Pin-Out		
Pin	Mark	Function
1	VCC	Input Power +
2	GND	GND
3	RXD1	Receiving Pin
4	TXD1	Sending Pin
5	RXD2	Receiving Pin
6	TXD2	Sending Pin
7	CANH2	CANH Pin
8	CANL2	CANL Pin
9	CANG2	Isolation Power Output
10	CANH1	CANH Pin
11	CANL1	CANL Pin
12	CANG1	Isolation Power Output

Notes:

1. Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25℃, humidity<75%RH with nominal input voltage and rated output load;
2. All index testing methods in this datasheet are based on company corporate standards;
3. The above are the performance indicators of the product models listed in this datasheet. Some indicators of non-standard models will exceed the above requirements;
4. Products are related to laws and regulations: see "Features" and "EMC";
5. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units;
6. The image certification marks are for reference only; please refer to the selection table for actual specifications. Certification is based on the physical mark or packaging label.